

Customer:	
Part No:	GTG-1305B-5V
Sample No:	
Description:	BUZZER
Item No:	

	Cust	omer	
Check	Inspection	Approval	Date




# A. SCOPE

This specification applies magnetic buzzer, HYG1305B


### **B. SPECIFICATION**

No.	ltem	Unit	Specification	Condition
1	Oscillation Frequency	KHz	2.4±0.4	
2	Operating Voltage	VDC	4~7	
3	Rated Voltage	VDC	5	
4	Current Consumption	mA	MAX. 30	at Rated Voltage
5	Sound Pressure Level	dB	MIN. 88	at 10cm at Rated Voltage
6	Tone Nature		Single	
7	Operating Temperature	°C	-20 ~ +70	
8	Storage Temperature	°C	-30 ~ +80	
9	Dimension	mm	12.8x 12.8x H6.5	See appearance drawing
10	Weight (MAX)	gram	2	
11	Housing Material		PPS(Black)	
12	Leading Pin		Plated Brass(Au)	See appearance drawing
13	Environmental Protection Regulation		RoHS	

### C. APPEARANCE DRAWING



Unit: mm

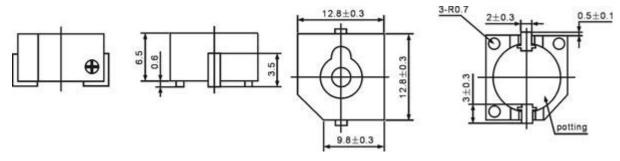



### GTG-1305B-5V


## D.TESTING METHOD

**Standard Measurement conditions** 


Temperature:25±2°C Humidity:45-65%

#### Acoustic Characteristics:


The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below

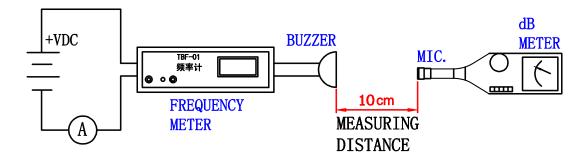

In the measuring test, buzzer is placed as follows:

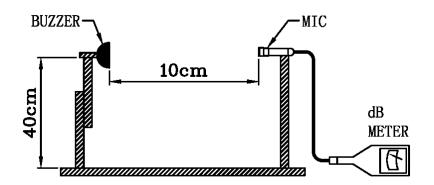

### E. VOLTAGE / CURRENT / SOUND PRESSURE CHARACTERISTICS

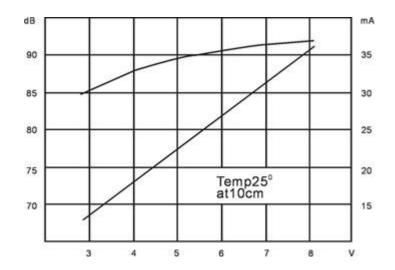




### F. Soldering Condition

(1)Recommendable reflow soldering condition is as follows

(Reflow soldering is twice)

Note: It is requested that reflow soldering should be executed

after heat of product goes down to normal.

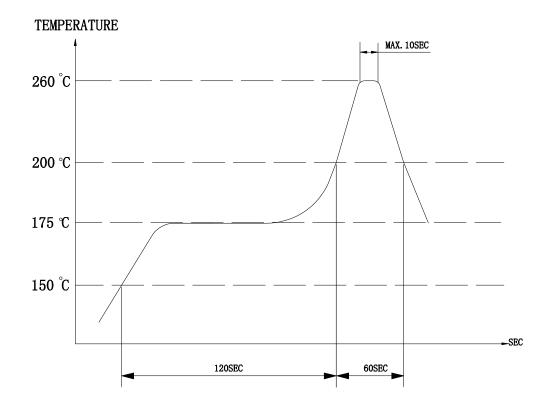

Heat resistant line

(Used when heat resistant reliability test is performed)

(2)Manual soldering

Manual soldering temperature 350 °C within 5 sec.



a REL	IABILITY TEST			
NO.	ITEM	TEST CONDITION AND REQUIREMENT		
1	High Temperature Test (Storage)	After being placed in a chamber with 85 2 ° C for 96 hours and then being placed in normal condition for 2 hours.		
		Allowable variation of SPL after test: 10dB.		
2	Low Temperature Test (Storage)	After being Placed in a chamber with -30 2 ° C for 96 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: 10dB.		
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40 2 ° C for 96 hours and then being placed in normal condition for 2 hours.		
		Allowable variation of SPL after test: 10dB.		
4	Temperature Cycle Test	The part shall be subjected to 5 cycles. One cycle shall be consist of: $+70^{\circ}C$ $+25^{\circ}C$ $+25^{\circ}C$ $+25^{\circ}C$ $-20^{\circ}C$ $-2$		
5	Drop Test	at the height of 75cm.		
6	Vibration Test	Allowable variation of SPL after test:10dB.After being applied vibration of amplitude of 1.5mm with 10 to 55 Hzband of vibration frequency to each of 3 perpendicular directions for 2 hours .Allowable variation of SPL after test:10dB.		
7	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of +300 5 ° C for 3 1 seconds . 90% min. lead terminals shall be wet with solder (Except the edge of terminals).		
8	Terminal Strength Pulling Test	The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds. No visible damage and cutting off.		