



## | S3 SERIES

### S SIZE FORM C (CHANGEOVER) REED RELAY



The S3 series is a compact reed relay with changeover contacts which are often used for safety critical applications.

Low contact resistance, through the use of rhodium contact reed switches, makes the S series suitable for many high voltage applications at DC and low frequency, where performance and reliability are paramount.

These are PCB mount relays, though custom options may be available on request.

#### Features

- Compact footprint
- Changeover contacts
- PCB Mount
- Available with or without magnetic screen

## SPECIFICATIONS

Contact	Unit	Condition			
Switch Action			SPCO		
Contact Material			Rhodium		
Isolation Across Contacts	kV	DC or AC peak	0.20		
Isolation Contact to Coil	kV	DC or AC peak	2		
Switching Power Max.	VA	resistive	3		
Switching Voltage Max.	V	DC	120		
Switching Current Max.	A	DC	0.25		
Carry Current Max	A	DC	1.2		
Capacitance Across Contacts	pF	coil to screen grounded	1.4		
Contact Resistance	mΩ max (typical)		150		
Insulation Resistance	Ω min (typical)		(10 <sup>9</sup> )		
Coil			<b>5V</b>	<b>12V</b>	<b>24V</b>
Must Operate Voltage	V	DC	3.75	9	18
Must Release Voltage	V	DC	0.5	1.2	2.4
Resistance	Ω (± 10%)		30	180	1000

Note. The operate / release voltage and coil resistance will change at a rate of 0.4% per degree C. Values are stated at room temperature (20 degrees C)

Environmental Conditions	Unit	Condition	
Operating Temperature Range	°C		-40 to +85
Storage Temperature Range	°C		-40 to +100
Shock - EN60068-2-27 11ms Half sine 50g. MIL-STD-202G Method 213B, Test condition A.			
Vibration - EN60068-2-6 Sine vibration 20g peak 10Hz to 2000Hz. MIL-STD-202G Method 204D, Test condition D.			


 **STANDARD PARTS**

	Coil Voltage Vdc	Magnetic Screen
<b>S3-05-C</b>	5	No
<b>S3-05-CM</b>	5	Yes
<b>S3-12-C</b>	12	No
<b>S3-12-CM</b>	12	Yes

Please refer to this document for circuit design notes:  
<https://www.cynergy3.com/blog/reed-relay-application-notes>

# DIMENSIONS

All dimensions are in millimeters.

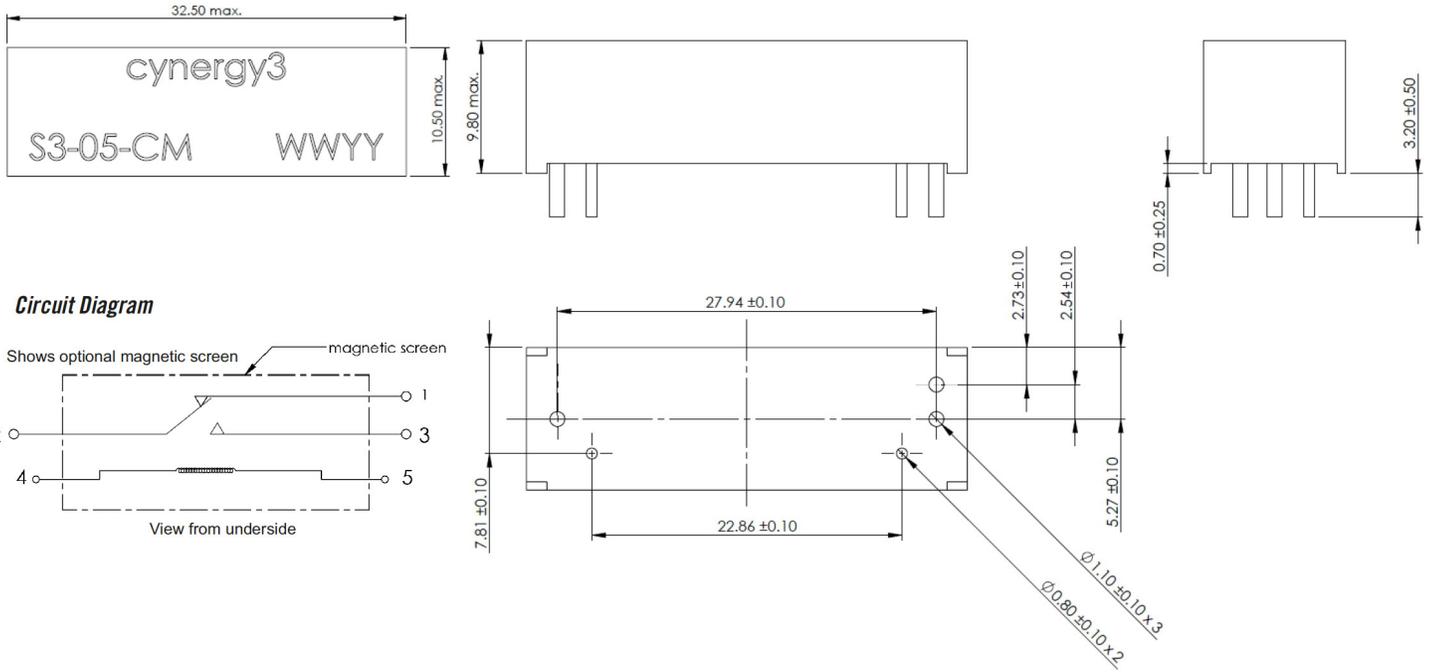

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice. Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com). SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

## CONTACT US

Sensata Technologies  
 Jan Tinbergenstraat 80  
 7559 SP Hengelo  
 The Netherlands  
 1-508-236-3800  
 +44 (0)1202 897969  
[cynergy3.enquiries@sensata.com](mailto:cynergy3.enquiries@sensata.com)