

## DESCRIPTION

The GLF73611 is a family of I<sub>Q</sub>Smart™ ultra-efficient ICs, with full battery protections which are accurate over charge/discharge voltage protection, over charge/discharge current protection and short circuit protection.

The over charge and discharge voltage protections are capable of keeping a rechargeable battery working within the desired safe operating condition. When the battery is charged above the over voltage detection level, the GLF73611 charging switches off in a preset delay time. As the battery voltage decreases lower than the over discharge detection voltage, the GLF73611 discharging switch is turned off immediately. In the off state, GLF73611 consumes an ultra-low leakage current (I<sub>SD</sub>) to save the battery power. In addition, when the load current is higher than the I<sub>SC</sub> short circuit protection current level, the GLF73611 is turned off and will maintain the off state to avoid any serious damage to system. The short circuit delay time can avoid any false trigger which might turn on the switch.

The GLF73611 provides a shipping mode to prevent smart devices which has a non-removable battery from discharging during the shipping period. When a charged battery cell is connected to the GLF73611, and GLF73611 remains in the off state, the smart devices consume an ultra-low leakage current (I<sub>SD</sub>). Note that the only way to active the GLF73611 is applying a charger output V<sub>ON</sub> voltage to V<sub>OUT</sub> pin.

The GLF73611 also has 0 V battery charge inhibition function. When the battery voltage is lower than 0 V battery charging inhibited Voltage (V<sub>TC</sub>), the battery is not allowed to charge.



## FEATURES

- Over Charge Detection Voltage, V<sub>OC</sub>
  - GLF73611A detects V<sub>OUT</sub> to release V<sub>OC</sub>
  - GLF73611B detects V<sub>BAT</sub> to release V<sub>OC</sub>
  - V<sub>OC</sub> high accuracy: ± 0.6 %
- Over Discharge Detection, V<sub>OD</sub>
  - GLF73611A detects 2.90 V<sub>OUT</sub>
  - GLF73611B detects 2.80 V<sub>BAT</sub>
- Over Charge Current Detection, I<sub>OC</sub>: 330 mA
- Over Discharge Current Detection, I<sub>OD</sub>: 215 mA
- Short Circuit Protection
- Activated by Applying V<sub>ON</sub> to the V<sub>OUT</sub> Pin from Charger
- Shipping Mode Implementation
- LOW R<sub>ON</sub>: 60 mΩ Typ. at 3.6 V<sub>BAT</sub>
- Low Quiescent Current, I<sub>Q</sub>: 1.6 μA Typ at 3.6 V<sub>BAT</sub>
- Shutdown Current:
  - I<sub>SD</sub> = 15 nA Typ. at V<sub>BAT</sub> < V<sub>OD</sub>
  - I<sub>SD</sub> = 21 nA Typ. at V<sub>BAT</sub> = 3.6 V, Shipping Mode
  - I<sub>SD</sub> = 26 nA Typ. at V<sub>BAT</sub> = 4.2 V, Shipping Mode
- Latch-off at Over Discharge Detection and Short Circuit Protection.
- 0 V Battery Charge Inhibition
- Patented Circuit Architecture

## APPLICATIONS

- BLE Wireless Earphone
- Hearing Aid
- Wearables and Smart IoT Devices

## PACKAGE

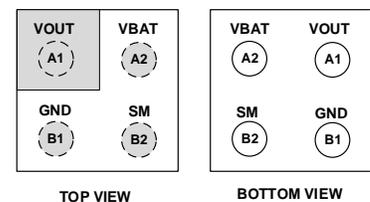


**0.97 mm x 0.97 mm x 0.55 mm WLCSP**


**DEVICE INFORMATION**

Part Number	R <sub>ON</sub> (Typ.) V <sub>BAT</sub> =3.6 V	Over Charge Detection V <sub>OC</sub>	Over Discharge Detection V <sub>OD</sub>	Over Charge Current I <sub>OC</sub>	Over Discharge Current I <sub>OD</sub>	Short Circuit Current I <sub>SC</sub>	Datasheet Type
GLF73611A-S2G7	60 mΩ	4.475 V	2.90 V	330 mA	215 mA	500 mA	Product
GLF73611B-S2G7			2.80 V				Preliminary

**APPLICATION DIAGRAM**

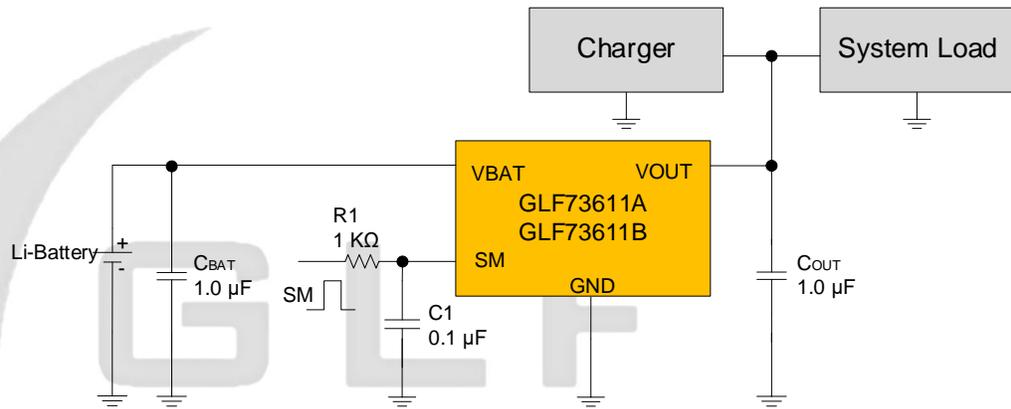

**OPERATION DIAGRAM**

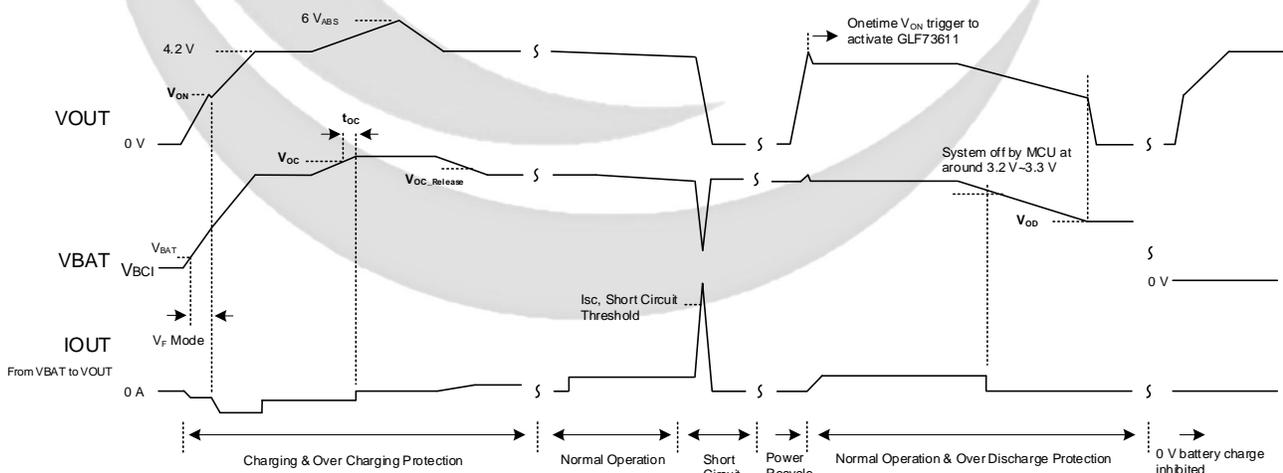

## FUNCTIONAL BLOCK DIAGRAM

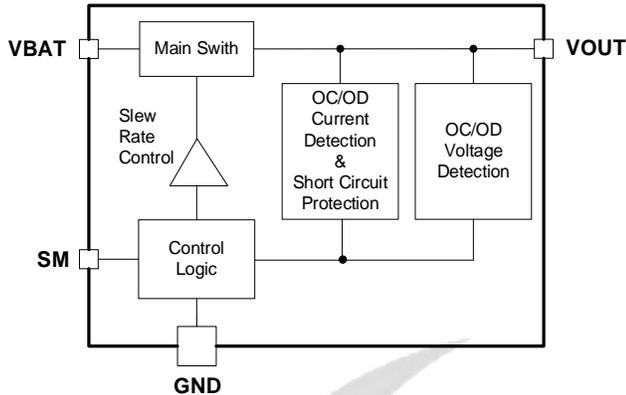


Figure 1. GLF73611A, V<sub>OC</sub> and V<sub>OD</sub> detect V<sub>OUT</sub>

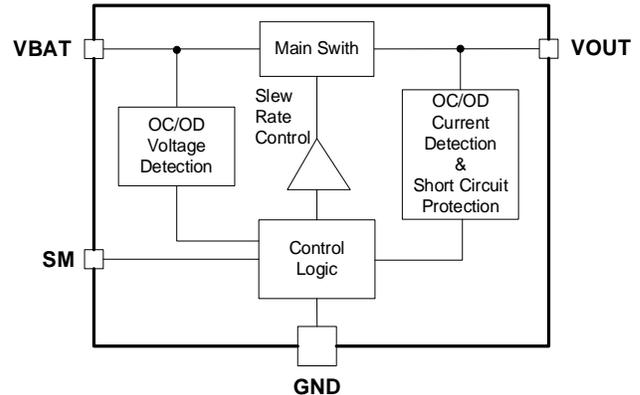


Figure 2. GLF73611B, V<sub>OC</sub> and V<sub>OD</sub> detect V<sub>BAT</sub>

## PIN CONFIGURATION

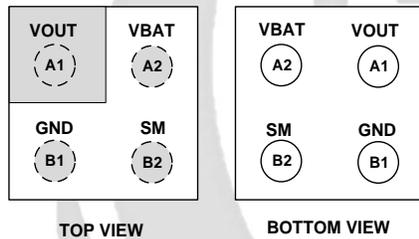


Figure 3. 0.97mm x 0.97mm x 0.55mm WLCSP

## PIN DEFINITION

Pin #	Name	Description
A1	VOUT	VOUT pin is connected to the charger output and system load. If the switch is in the off state, applying an appropriate voltage (V <sub>ON</sub> ) to V <sub>OUT</sub> to turn the switch on.
A2	VBAT	VBAT pin is connected to the positive terminal of a battery pack to monitor the battery voltage.
B1	GND	Ground
B2	SM	Shipping Mode Control. Active high.

## ABSOLUTE MAXIMUM RATINGS

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions; extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Min	Max	Unit
V <sub>BAT</sub> , V <sub>OUT</sub> , V <sub>SM</sub>	Each Pin Voltage Range to GND	- 0.3	6	V
P <sub>D</sub>	Power Dissipation at T <sub>A</sub> = 25°C		1.2	W
T <sub>STG</sub>	Storage Junction Temperature	- 65	150	°C
T <sub>A</sub>	Operating Temperature Range	- 40	85	°C
θ <sub>JA</sub>	Thermal Resistance, Junction to Ambient		85	°C/W
ESD	Electrostatic Discharge Capability	Human Body Model, JESD22-A114	±8	kV
		Charged Device Model, JESD22-C101	±1	


**ELECTRICAL CHARACTERISTICS**

 Values are at V<sub>BAT</sub> = 3.6 V, T<sub>A</sub> = 25 °C unless otherwise noted.


Symbol	Parameter	Conditions	Min	Typ	Max	Units	
V <sub>OC</sub>	Over Charge Voltage Detection	V <sub>BAT</sub> increases until switch turns off	4.45	4.475	4.5	V	
		T <sub>A</sub> = 55 °C <sup>(1)</sup>		4.471			
V <sub>OC_HYS</sub>	Over Charge Voltage Protection Release Hysteresis	V <sub>BAT</sub> decreases and switch turns on		150		mV	
t <sub>VO</sub>	Over Charge Voltage Protection Delay Time	V <sub>BAT</sub> > V <sub>OC</sub> , Blanking time until switch turns off	0.8	1.2	1.6	s	
V <sub>OD</sub>	Over Discharge Voltage Detection	V <sub>BAT</sub> decreases until switch turns off, GLF73611A	2.85	2.90	2.95	V	
		T <sub>A</sub> = 55 °C <sup>(1)</sup> , GLF73611A		2.89			
		V <sub>BAT</sub> decreases until switch turns off, GLF73611B	2.75	2.80	2.85		
		T <sub>A</sub> = 55 °C <sup>(1)</sup> , GLF73611B		2.79			
V <sub>OD_HYS</sub>	Over Discharge Voltage Protection Release Hysteresis	V <sub>BAT</sub> increases and switch turns on		150		mV	
t <sub>VO</sub>	Over Discharge Voltage Protection Delay Time	V <sub>BAT</sub> < V <sub>OD</sub> , Blanking time until switch turns off	54	77	100	ms	
V <sub>ON</sub> <sup>(1)</sup>	ON Voltage applied to V <sub>OUT</sub> to turn on switch	V <sub>OUT</sub> to turn on switch, V <sub>BAT</sub> ≥ 3.1 V		3.6		V	
		T <sub>A</sub> = 55 °C		3.6			
I <sub>OC</sub>	Over Charge Current Detection		260	330	400	mA	
t <sub>IOC</sub>	Over Charge Current Detection Delay Time		6.5	9.5	12.5	ms	
I <sub>OD</sub>	Over Discharge Current Detection		150	215	320	mA	
t <sub>IOD</sub>	Over Discharge Current Detection Delay Time		6.5	9.5	12.5	ms	
I <sub>SC</sub>	Short Circuit Current Detection Threshold		400	500		mA	
t <sub>SC</sub>	Short Circuit Delay Time	I <sub>SC</sub> , Short Circuit Current ≥ 650 mA	50	160	200	μs	
V <sub>BCI</sub>	0 V Battery Charge Inhibition Voltage	0 V Battery Charge Inhibited	1.2	1.32	1.5	V	
I <sub>Q</sub>	Quiescent Current with Switch On	V <sub>BAT</sub> = 4.2 V, I <sub>OUT</sub> = 0 mA, Switch = ON	T <sub>A</sub> = 25 °C	1.2	1.7	2.2	μA
			T <sub>A</sub> = 55 °C <sup>(1)</sup>		1.8		
		V <sub>BAT</sub> = 3.6 V, I <sub>OUT</sub> = 0 mA, Switch = ON		1.1	1.6	2.1	
I <sub>SD</sub>	Shutdown Current from V <sub>BAT</sub> When Main Switch is Off	V <sub>BAT</sub> = 4.2 V, V <sub>OUT</sub> = 0 V, Shipping Mode		26	100	nA	
		V <sub>BAT</sub> = 3.6 V, V <sub>OUT</sub> = 0 V, Shipping Mode		21	80		
		V <sub>BAT</sub> = 2.5 V, V <sub>OUT</sub> = 0 V	T <sub>A</sub> = 25 °C		15		70
			T <sub>A</sub> = 55 °C <sup>(1)</sup>		50		
R <sub>ON</sub>	On-Resistance	V <sub>BAT</sub> = 4.2 V, I <sub>OUT</sub> = 70 mA	T <sub>A</sub> = 25 °C		56	62	mΩ
			T <sub>A</sub> = 55 °C <sup>(1)</sup>		60		
		V <sub>BAT</sub> = 3.6 V, I <sub>OUT</sub> = 70 mA	T <sub>A</sub> = 25 °C		60	66	
			T <sub>A</sub> = 55 °C <sup>(1)</sup>		65		
t <sub>OFF</sub> <sup>(1)</sup>	Turn-Off Time	C <sub>OUT</sub> = 1.0 μF, R <sub>OUT</sub> = 150 Ω, V <sub>OUT</sub> = V <sub>OD</sub> to 0 V		330		μs	
V <sub>SM</sub>	SM Input Logic High Voltage	V <sub>BAT</sub> = 2.5 V to 5.5 V	1.2			V	
t <sub>SM</sub>	SM Pulse Width	V <sub>BAT</sub> = 3.3 V to 4.2 V	25			ms	
t <sub>DSM</sub>	Shipping Mode Delay	V <sub>BAT</sub> = 3.3 V to 4.2 V	0.8	1.2	1.6	s	
R <sub>SM</sub>	SM Pull Down Resistance	Internal Resistance		440		kΩ	

Notes: 1. By design; characterized, not production tested.  
 2. All values of delay timing were characterized but not tested in production.


**TYPICAL PERFORMANCE CHARACTERISTICS**

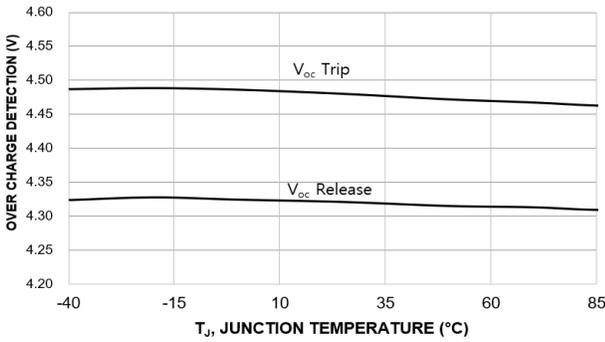


**Figure 4. Over Charge Voltage Detection vs. Temperature**

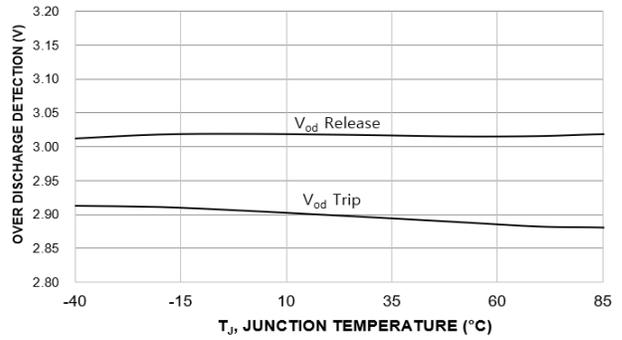


**Figure 5. GLF73611A Over Discharge Voltage Detection vs. Temperature**

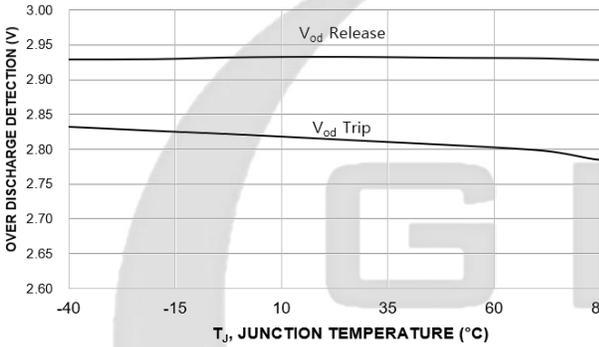


**Figure 6. GLF73611B Over Discharge Voltage Detection vs. Temperature**

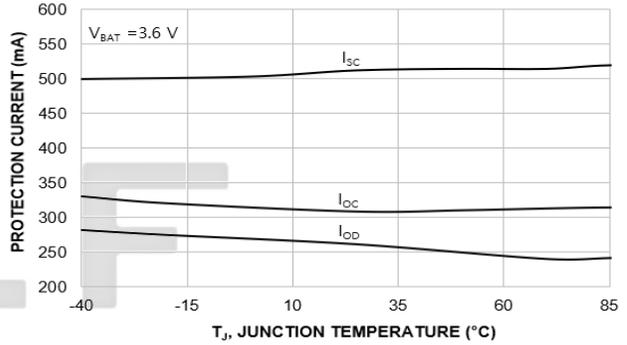


**Figure 7. Current Protection vs. Temperature**

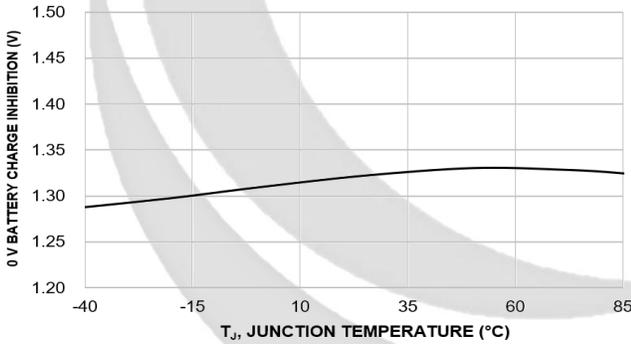


**Figure 8. 0 V Battery Charge Inhibition vs. Temperature**

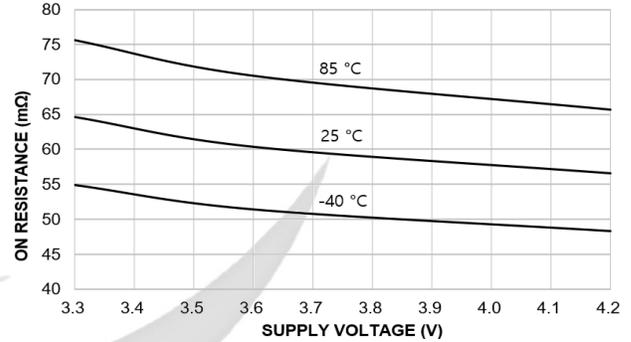

**Figure 9. On-Resistance vs. Supply Voltage**

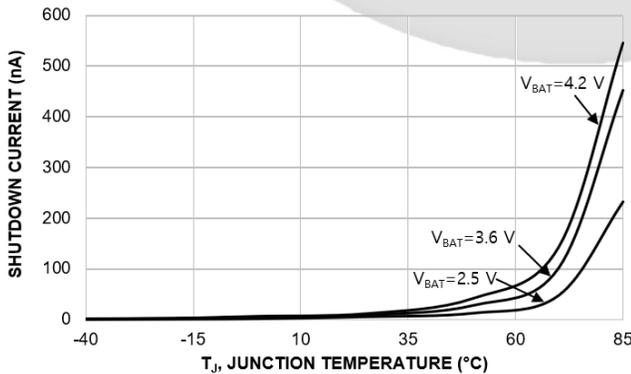

**Figure 10. Shutdown Current vs. Temperature**

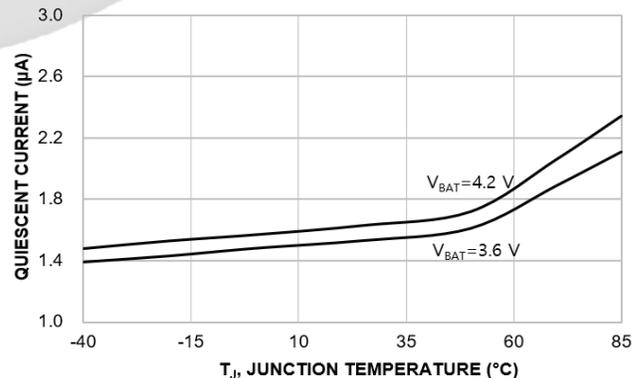

**Figure 11. Quiescent Current vs. Temperature**

## APPLICATION INFORMATION

### Charging Activation and 0 V Battery Charging Inhibition

The GLF73611 is activated to turn on the main charging switch only by applying the on voltage ( $V_{ON}$ ) to the VOUT pin when a charger IC is enabled. With a deeply discharged battery, the GLF73611 does not turn on both the charge and discharge path and the pre-charge current flows through an internal diode until the battery is charged up to the over discharge voltage detection level ( $V_{OD}$ ). The GLF73611A provides a hiccup charging mode when the charge mode changes from the pre-charge to the constant current charge mode. The main switch of the GLF73611A turns on and off in 77 ms period and pulse current charges the battery until the charge mode is completely transferred to the constant current mode. As the battery voltage increases beyond the over discharge detection voltage, the main switch will be fully activated to reduce the voltage drop and save power dissipation during both constant-current and constant-voltage charge modes. When a battery is fully discharged lower than the 0 V battery charge inhibition voltage ( $V_{BCI}$ ), the GLF73611 turns off the charge path to prevent it from being charged for safety.

### Over Charging and Over Discharging Voltage Protection

When the voltage of a battery is higher than the over-charge voltage detection level ( $V_{OC}$ ), the charge path is turned off to stop charging the battery. In order to avoid a false trigger, the GLF73611 turns off after a preset over charge detection delay time ( $t_{OC}$ ). If the  $t_{OC}$  is longer than the period that battery voltage keeping higher than  $V_{OC}$ , the charging path is not turned off. For the GLF73611A, the charging path turns on back when the VOUT voltage decreases lower than the over charge release voltage level ( $V_{OC} - V_{OC\_HYS}$ ). For the GLF73611B, the charging path turns on back when the battery voltage decreases lower than the over charge release voltage level ( $V_{OC} - V_{OC\_HYS}$ ). When the voltage of a battery is lower than the over discharge detection voltage, the GLF73611 discharging path is turned off. In the off state, the GLF73611 consumes an ultra-low leakage current to save the battery power. The GLF73611 remains in the off state until a higher voltage applied to the VOUT pin.

### Over Charging and Discharging Current, Short Circuit Protection

If an over-charging current is detected at the constant current charging mode, the GLF73611 will shut off the charging path after a preset detection delay time. When the over discharging current happens for the detection delay time ( $t_{IOD}$ ), the discharge path turns off. If GLF73611 detects the discharge current over a short-circuit current detection threshold ( $I_{SC}$ ), the discharge path will be turned off in a preset short circuit delay time ( $t_{SC}$ ). The higher a short-circuit current is occurred, the shorter the short circuit delay time is in order to protect the device. After the short circuit protection event, the GLF73611 maintains the off state and needs a power recycle to enable the device again by applying the  $V_{ON}$  to VOUT pin.

### Shipping Mode

The GLF73611 provides the SM pin to turn off the GLF73611 completely. At the shipping mode, The GLF73611 consumes an ultra-low current to maintain the battery capacity. The GLF73611 is activated again by applying  $V_{ON}$  to the VOUT pin when a charger is applied. An RC filter circuit can be added in front of SM to prevent interference when the shipping mode is not enabled.



### Input and Output Capacitors

A minimum 1.0  $\mu$ F input capacitor is recommended to place close to the VBAT and VOUT pins to reduce the voltage drop on the input power rail, which caused by transient inrush current at start-up. A higher input capacitance value is to attenuate the input voltage drop. Also, a minimum 1.0  $\mu$ F output capacitor is recommended to minimize voltage undershoot happened at the output pin when the switch is turned off. Undershoot can be caused by parasitic inductance from board traces or intentional load inductances. If load inductances exist, an output capacitor can improve the output voltage stability and system reliability. The  $C_{OUT}$  capacitor must be placed to the VBAT and VOUT pins as close as possible.


### Board Layout

All the external components should be placed to the GLF73611 as close as possible. All traces should be as short as possible to minimize parasitic inductance. Wide traces of VBAT, VOUT and GND can reduce parasitic effects under dynamic operations to improve thermal performance at high current loading.

**PACKAGE OUTLINE**

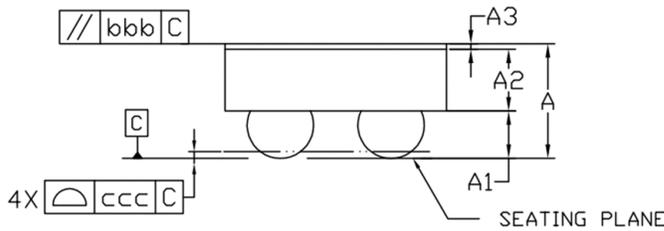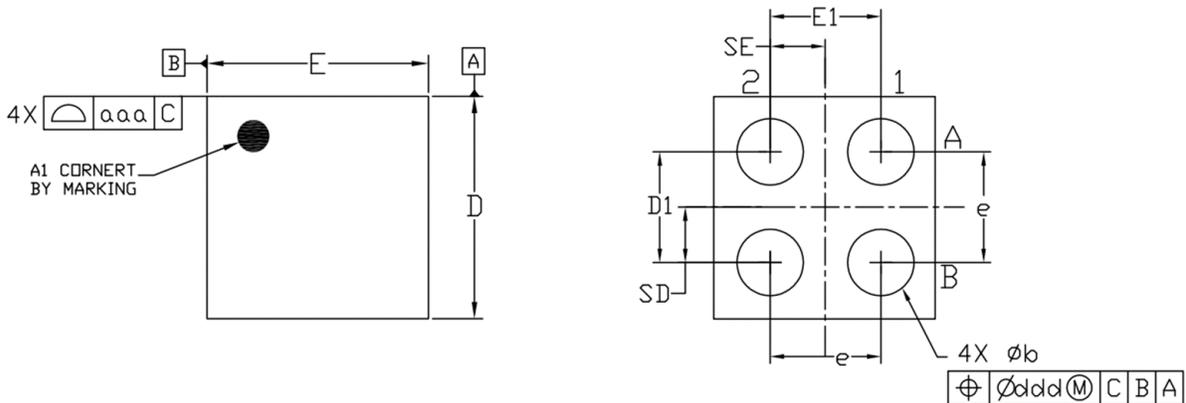

**Recommended Footprint**

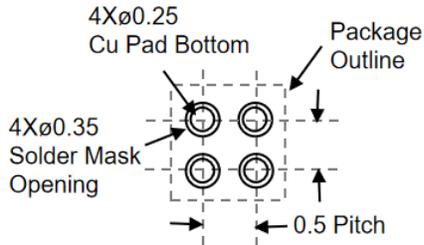

**Notes**

1. ALL DIMENSIONS ARE IN MILLIMETERS (ANGLES IN DEGREES)
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1994.
3. A3: BACKSIDE LAMINATION


Dimensional Ref.			
REF.	Min.	Nom.	Max.
A	0.500	0.550	0.600
A1	0.225	0.250	0.275
A2	0.255	0.275	0.300
A3	0.020	0.025	0.030
D	0.960	0.970	0.985
E	0.960	0.970	0.985
D1	0.450	0.500	0.550
E1	0.450	0.500	0.550
b	0.260	0.310	0.360
e	0.500 BSC		
SD	0.250 BSC		
SE	0.250 BSC		
Tol. of Form&Position			
aaa	0.10		
bbb	0.10		
ccc	0.05		
ddd	0.05		

**PACKAGING INFORMATION**


Part Number	Package	Pins	Pitch	Top Mark	Moisture Sensitivity Level	Environmental Information
GLF73611A-S2G7	0.97 mm x 0.97 mm x 0.55 mm WLCSP	4	0.5mm	EI	MSL1	ROHS+HF
GLF73611B-S2G7				FI		

**TAPE AND REEL INFORMATION**


**REEL DIMENSIONS**




**QUADRANT ASSIGNMENTS PIN 1 ORIENTATION TAPE**

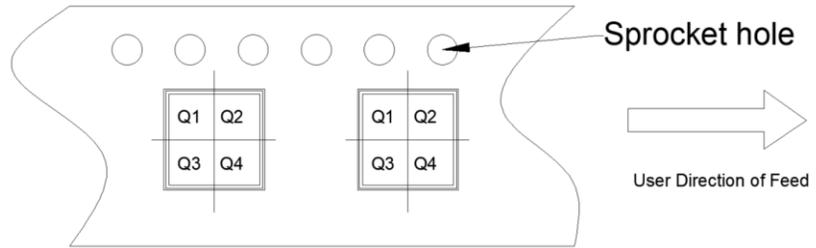

**TAPE DIMENSIONS**

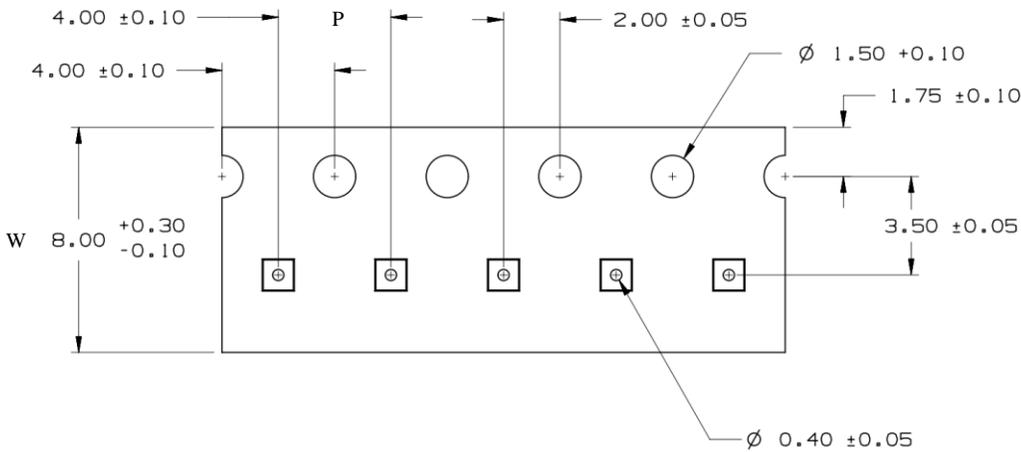

WER

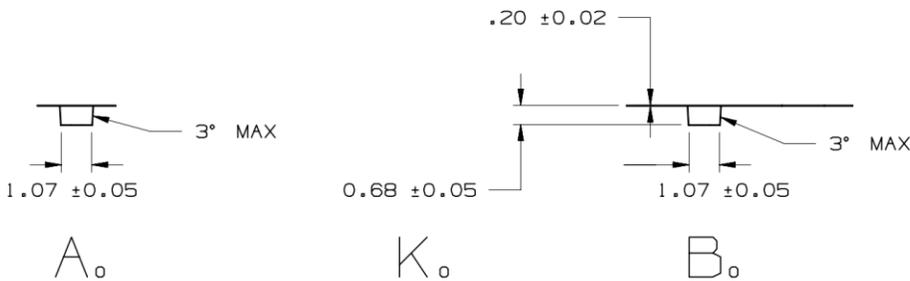

Device	Package	Pins	SPQ	Reel Diameter (mm)	Reel Width W1	A0	B0	K0	P	W	Pin1
GLF73611A-S2G7	WLCSP	4	3000	180	9	1.07	1.07	0.68	4	8	Q1
GLF73611B-S2G7	WLCSP	4	3000	180	9	1.07	1.07	0.68	4	8	Q1

**Remark:**

- A0: Dimension designed to accommodate the component width
- B0: Dimension designed to accommodate the component length
- C0: Dimension designed to accommodate the component thickness
- W: Overall width of the carrier tape
- P: Pitch between successive cavity centers

**SPECIFICATION DEFINITIONS**

Document Type	Meaning	Product Status
Target Specification	This is a target specification intended to support exploration and discussion of critical needs for a proposed or target device. Parameters including the typical, minimum, and maximum values are desired, or target. GLF reserves the right to change contents at any time without warning or notification. A target specification will not guarantee the future production of the device.	Design / Development
Preliminary Specification	This is a draft version of a product specification which is under internal review and subject to change. GLF reserves the right to change the specification at any time without warning or notification. A preliminary specification will not guarantee the future production of the device.	Qualification
Product Specification	This document represents the characteristics of the device.	Production

**DISCLAIMERS**

Information in this document is believed to be accurate and reliable, however GLF assumes no liability for errors or omissions. Device performance may be impacted by testing methods and application use cases. Users are responsible to independently evaluate the applicability, usability, and suitability of GLF devices in their application. In no case will GLF be liable for incidental, indirect, or consequential damages associated with the use, mis-use, or sale of its product. Customers are wholly responsible to assure GLF devices meet their system level and end product requirements. GLF retains the right to change the information provided in this data sheet without notice.