



Part No. M620720 ISM 868 or 915 MHz Embedded Ceramic Antenna

868 MHz; 915 MHz
 Supports: ISM, LoRa



KYOCERA AVX's series of Ceramic Isolated Magnetic Dipole™ (IMD) antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for 868 and 915 MHz ISM enabled handheld devices, media players and other mobile devices.

Real-World Performance and Implementation

Ceramic antennas may look alike on the outside, but the important difference is inside. Other antennas may contain simple PIFA or monopole designs that interact with their surroundings, complicating layout or changing performance with use position. KYOCERA AVX's antennas utilize patented IMD technology to deliver a unique size and performance combination.

ISM 868 or 915 MHz Embedded Ceramic Antenna

868 MHz; 915 MHz

KEY BENEFITS

Stay-in-Tune

IMD antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

Environmental Compliance

Products are the latest RoHS version compliant.

APPLICATIONS

- Embedded design
- Cellular, Headsets, Tablets
- Gateway, Access Point
- Handheld
- Telematics
- Healthcare (FDA Class I)
- M2M, Industrial devices
- Smart Grid
- OBD-II
- Tracking

Electrical Specifications

Typical performance on 40 x 100 mm PCB

Frequency	902 - 928 MHz	868 - 870 MHz
Peak Gain	2.06 dBi	<i>Refer to Appendix</i>
Average Efficiency	73%	
VSWR Match	2.2:1 max	
Feed Point Impedance	50 ohms unbalanced	
Polarization	Linear	
Power Handling	0.5 Watt CW	
Additional Resources	Download Application Note and Simulation Files	

Mechanical Specifications & Ordering Part Number


Ordering Part Number	M620720
Size (mm)	6.00 x 2.00 x 1.08
Mounting	SMT
Weight (grams)	0.1
Packaging	Tape & Reel, M620720 – 1,000 pieces per reel
Demo Board	M620720-01
Additional Resources	Download DXF, Gerber and 3D FIT Files

ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Antenna Dimensions

Typical antenna dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)
M620720	6.00 ± 0.2	2.00 ± 0.2	1.08 ± 0.1

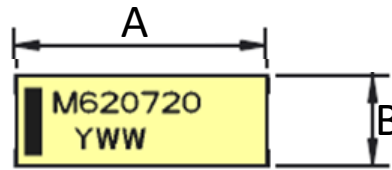


Top View

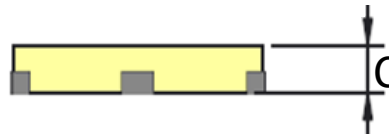

Height

Pin	Description
1	Feed
2	Dummy
3	Ground

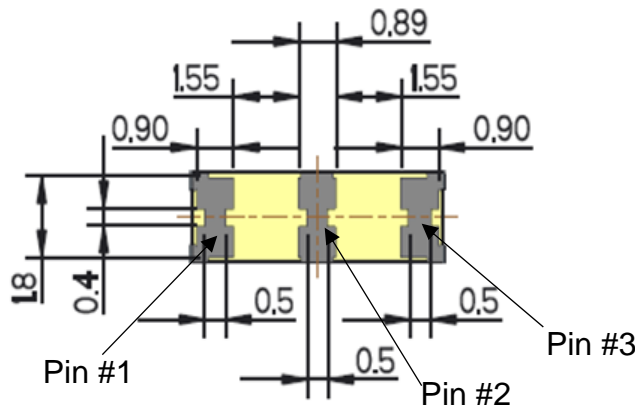





Bottom View

ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

VSWR, Efficiency Plots (Tuned @ 915MHz)

Typical performance on 40 x 100 mm PCB

Component	902-928 MHz		
	Value	KYOCERA AVX Part Number	Tolerance
P1	3.1 pF	04023J3R1ABSTR	±0.05 pF
P2	4.1 pF	04023J4R1ABSTR	± 0.05 pF

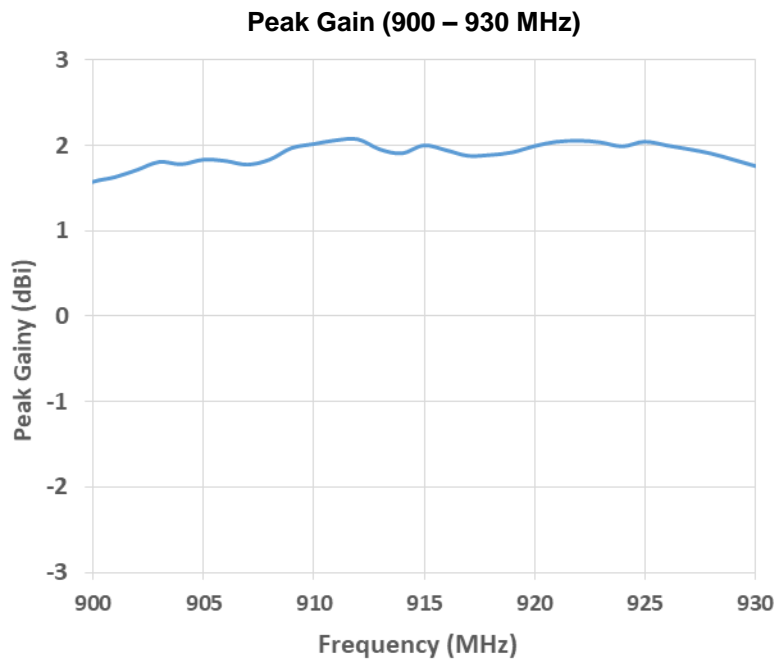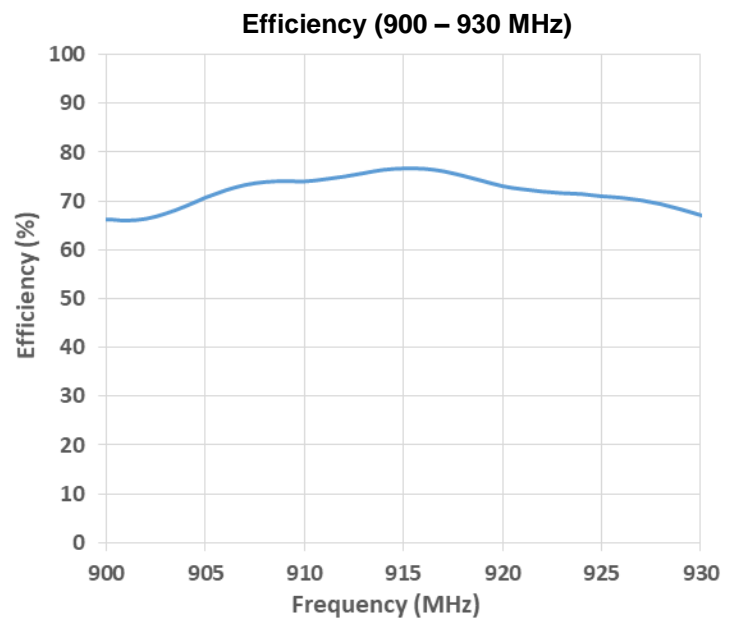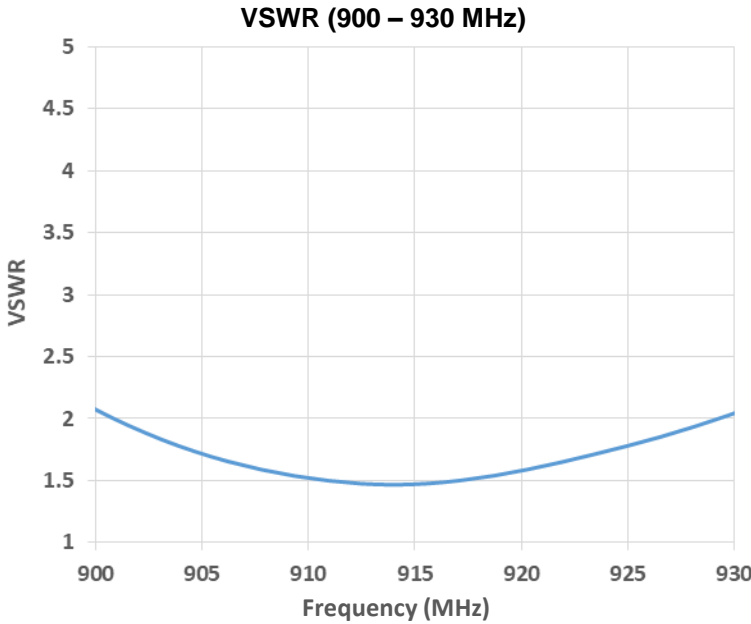


ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns


Typical performance on 40 x 100 mm PCB
 Measured @ 915 MHz




Phi = 0° Plane

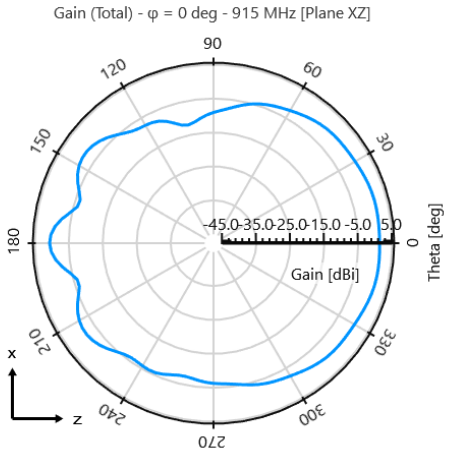

Phi = 90° Plane

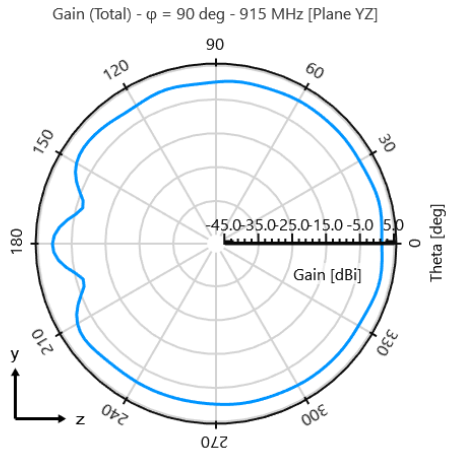



Theta = 90° Plane

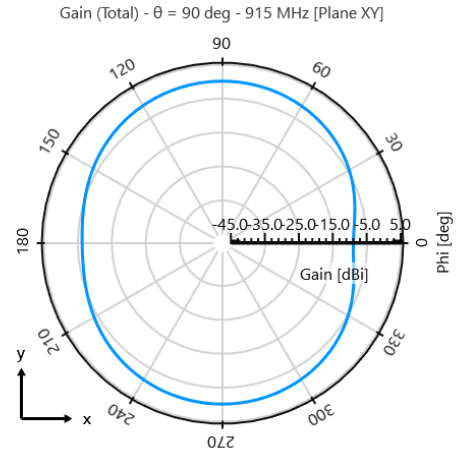

ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Board Layout

Typical layout dimensions (mm)

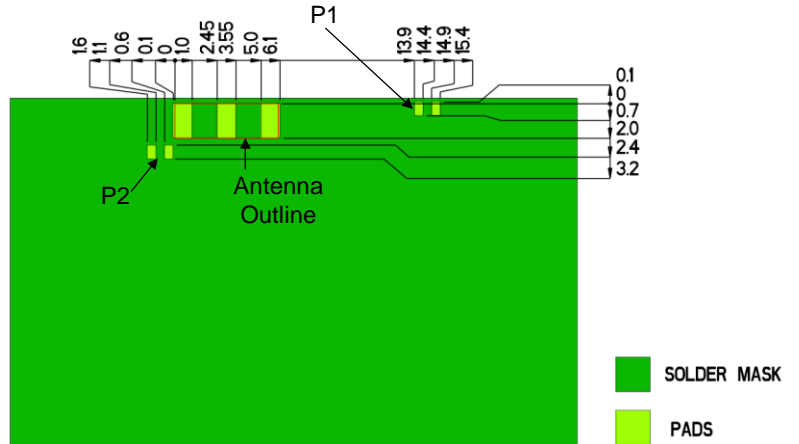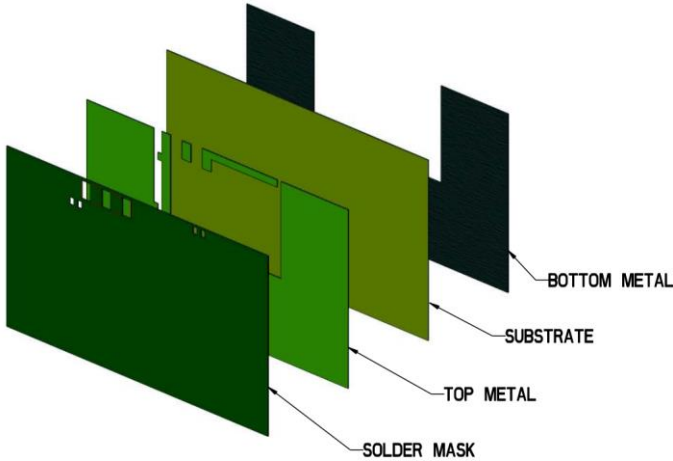

Pin Descriptions



Pin#	Description
1	Feed
2	Dummy
3	Ground

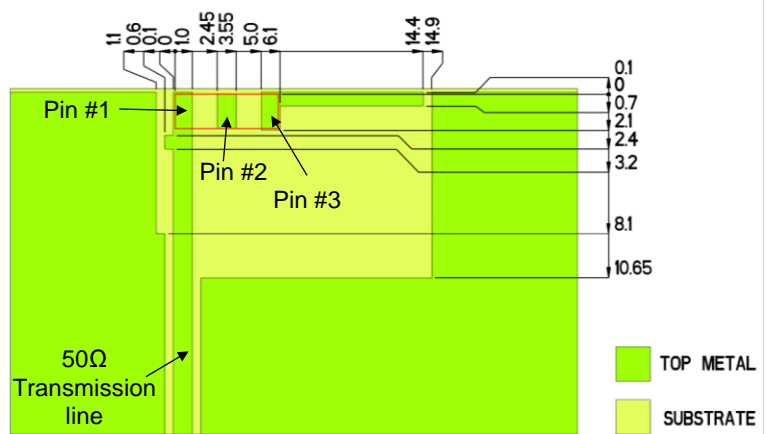

Matching Network (Demo Board)

902-928 MHz		
Component	Value	Tolerance
P1	3.1 pF	±0.05 pF
P2	4.1 pF	±0.05 pF

*Actual matching values depend on customer design

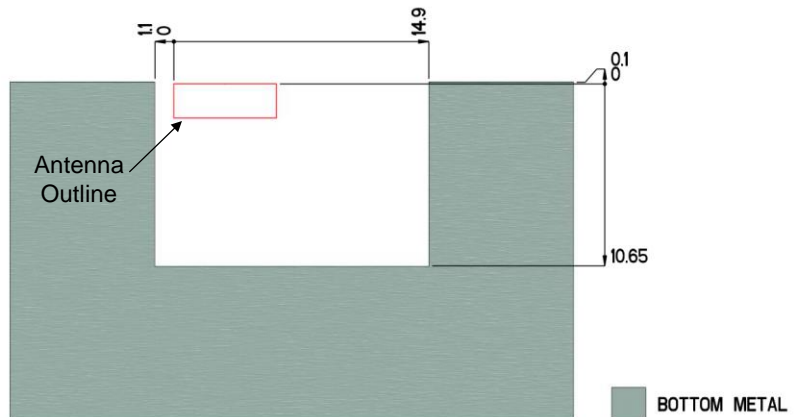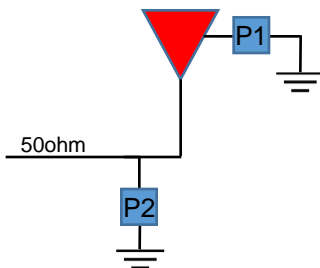


ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Demo Board

Typical layout dimensions (mm)

Part Number	A (mm)	B (mm)	C (mm)
M620720-01	100.0	40.0	50.0

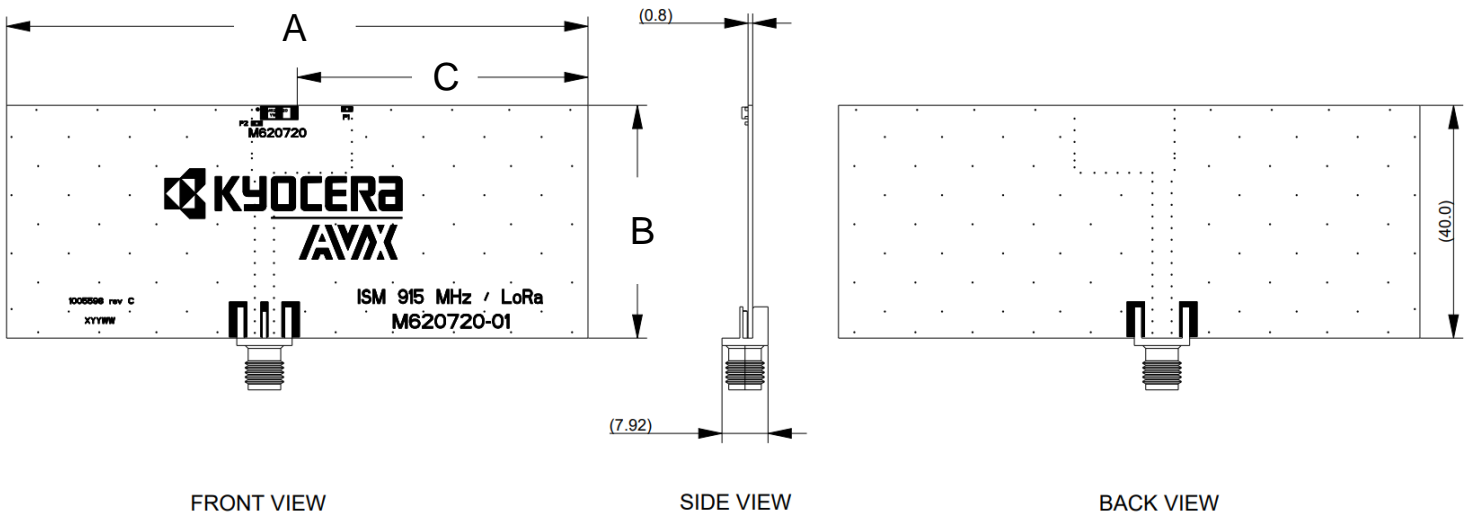

ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Appendix 1

Appendix 1 gives instructions on how to achieve coverage at low frequency through impedance matching network.

(868 - 870 MHz)

Electrical Specifications

Typical performance on 40 x 100 mm PCB


Frequency (MHz)	868-870 MHz
Peak Gain	1.54 dBi
Average Efficiency	69 %
VSWR Match	2:1 max
Polarization	Linear
Power Handling	0.5 Watt CW
Feed Point Impedance	50 ohms unbalanced
Additional Resources	Download Application Note and Simulation Files

ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


VSWR, Efficiency Plots (Tuned @ 868 MHz)

Typical performance on 40 x 100 mm PCB


Component	ISM 868 MHz		
	Value	KYOCERA AVX Part Number	Tolerance
P1	3.9 pF	04023J3R9ABWTR	±0.05 pF
P2	5.1 pF	04023J5R1ABSTR	± 0.05 pF




VSWR (863 – 870 MHz)

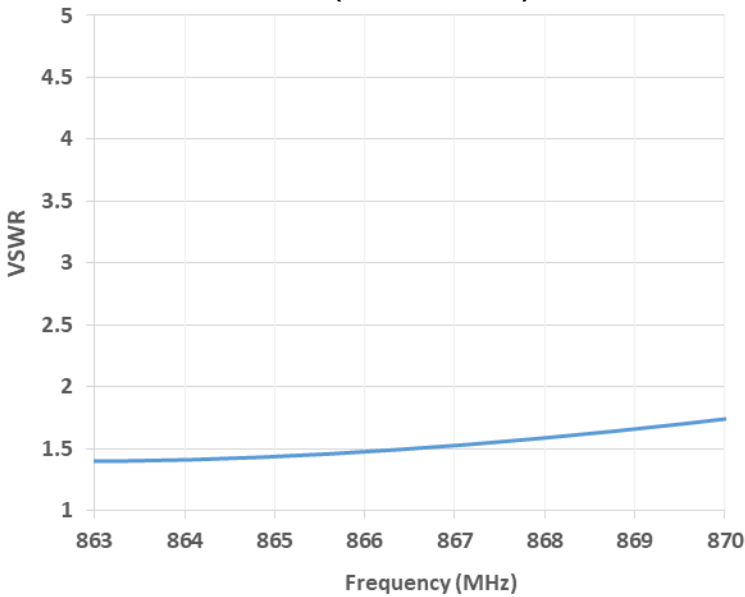

Efficiency (863 – 870 MHz)

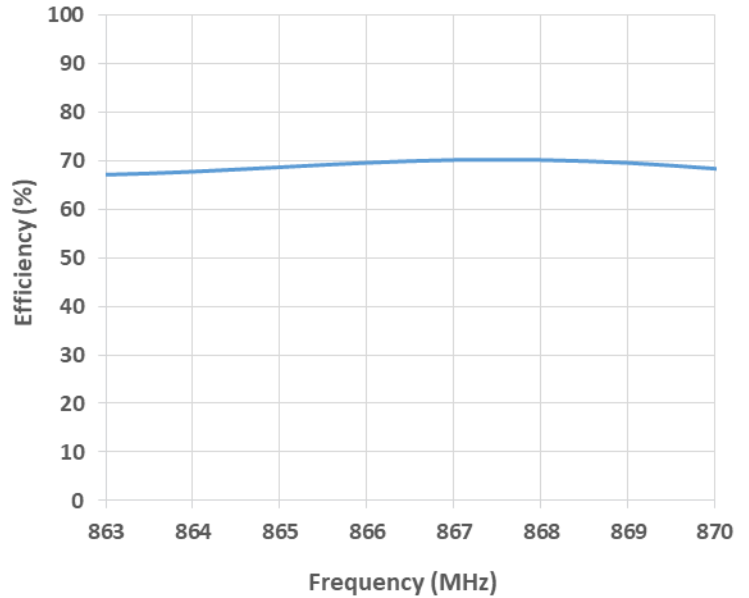

Peak Gain (863 – 870 MHz)

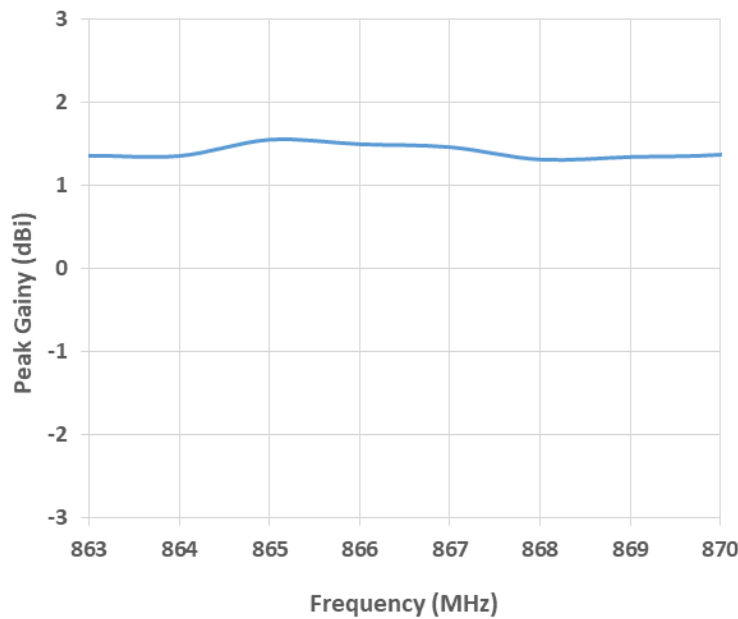


ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns


Typical performance on 40 x 100 mm PCB
 Measured @ 868 MHz




Phi = 0° Plane

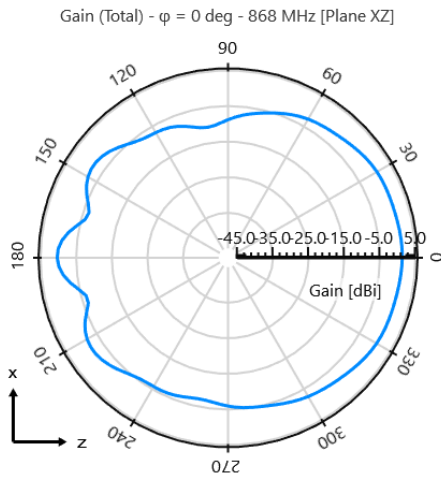

Phi = 90° Plane

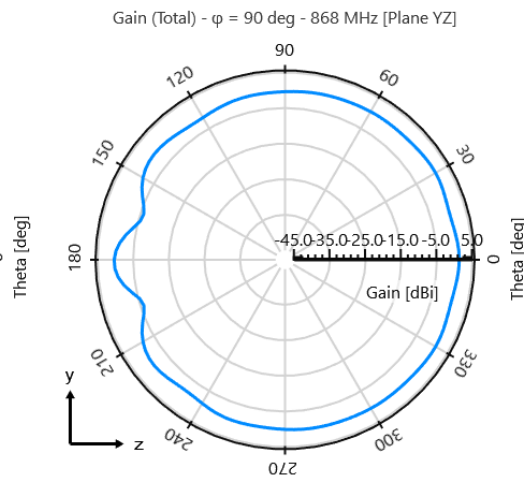



Theta = 90° Plane

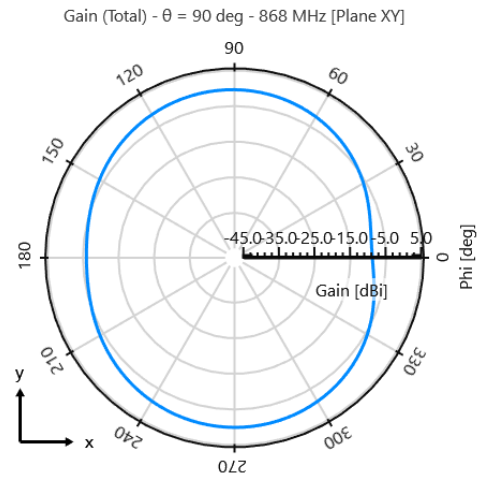

ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Board Layout

Typical layout dimensions (mm)

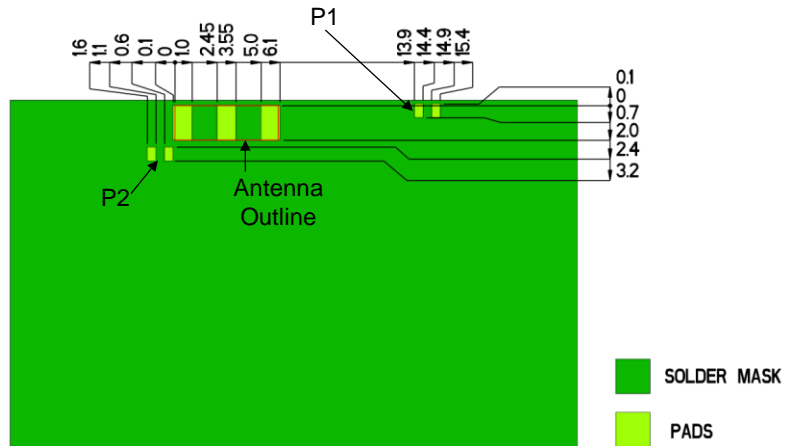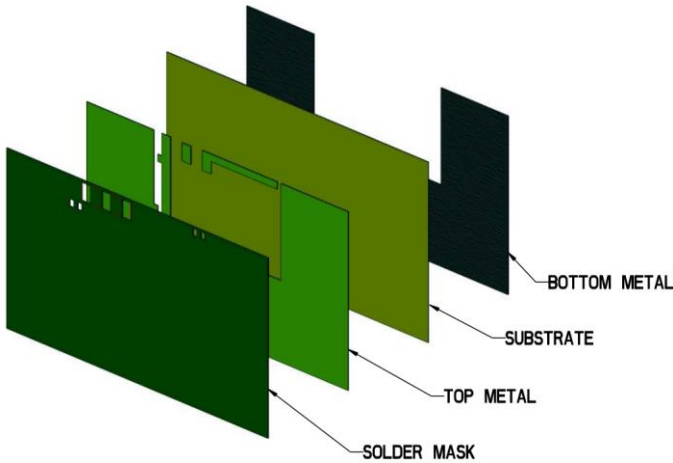

Pin Descriptions



Pin#	Description
1	Feed
2	Dummy
3	Ground

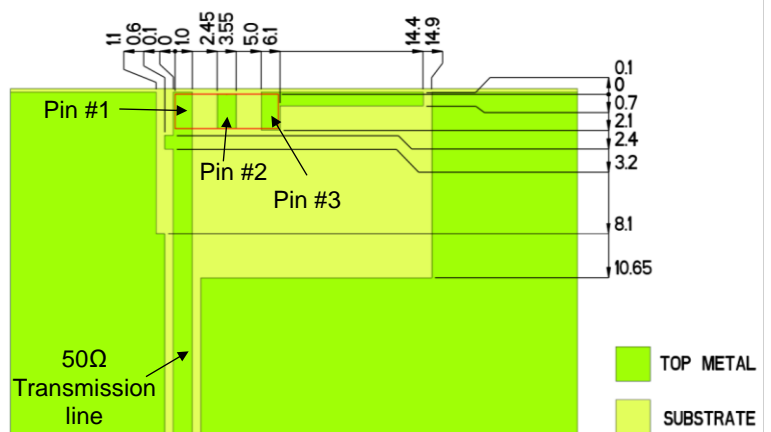

Matching Network (Demo Board)

Component	868-870 MHz	
	Value	Tolerance
P1	3.9 pF	±0.05 pF
P2	5.1 pF	±0.05 pF

*Actual matching values depend on customer design

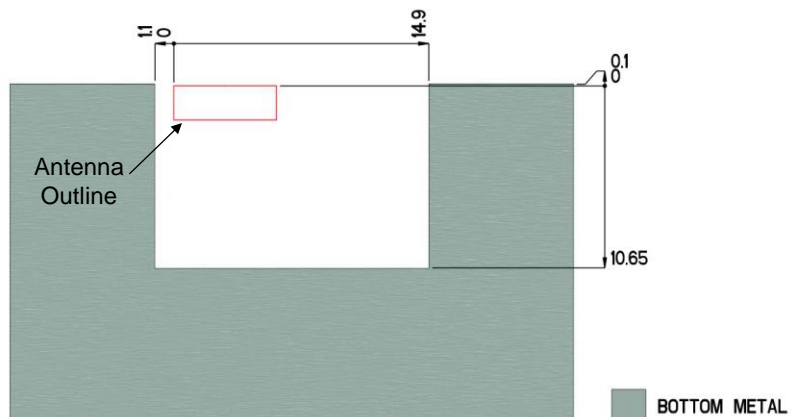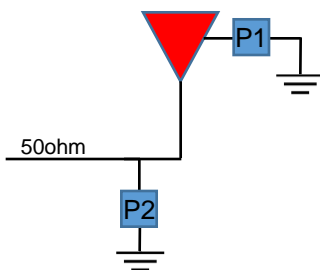

ISM 868 or 915 MHz Embedded Ceramic Antenna Specifications
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Additional Resources – M620720

Simulation Files:

HFSS (23R1): https://www.kyocera-avx.com/download/antennas/ansys-hfss/23r1/M620720_23r1.zip

HFSS (19R3-22R2): https://www.kyocera-avx.com/download/antennas/ansys-hfss/22r2/M620720_22r2.zip

CST : https://www.kyocera-avx.com/download/antennas/CST/M620720&M620720-01_CST2023_06182024.zip

Application Note:

https://www.kyocera-avx.com/docs/techinfo/ApplicationNotes/Antenna-AppNotes/AVX-E_AppNote-M-Series.pdf

3D FIT File:

https://www.kyocera-avx.com/download/antennas/ME-FIT/M620720_ME_fit.zip

DXF File:

https://www.kyocera-avx.com/download/antennas/3D-DXF/M620720_3D-DXF.zip

Gerber File:

https://www.kyocera-avx.com/download/antennas/GERBER/M620720_GERBERS.zip