



The PR-59 temperature controller is designed for reversible (cooling/heating) control of thermoelectric assemblies requiring precise temperature control accuracy. The controller not only regulates the temperature, but also features two programmable fan outputs and an alarm output relay. The controller can be used as a stand-alone unit interface with RS-232 to read and control parameters and settings in realtime. An easy-to-use PC software is included for programming and visual review of output parameters. Custom configurations can be accommodated, however MOQ applies.

## FEATURES

- Operation in cooling and heating modes
- Regulation mode is user selectable & configurable (PID, ON/OFF, POWER)
- Input power range can accommodate 12- 30 VDC
- Programmable set point (via pc, or potentiometer)
- Outputs are available for fan, thermoelectric module, NTC thermistor or PT1000 sensors, alarm and LEDs
- RS-232 Communication
- Graphical User Interface that runs on Windows

## APPLICATIONS

- Medical diagnostics
- Analytical instrumentation
- Photonics laser systems
- Electronic enclosure cooling
- Chillers (liquid cooling)

## BENEFITS

- Real-time control of regulator parameters and temperature readings via RS232 interface
- Standalone operation
- Control temperature, from -20°C to +100°C (-4°F to +212°F) with the standard NTC sensor Other temperature range possible with other (NTC, PT1000) sensors
- Configurable alarms
- Temperature resolution of max 0.01°C
- Use NTC or PT1000 sensors
- Pulse width modulation of output: (Base Frequency of 10 kHz)
- Control Stability of  $\pm 0.05^{\circ}\text{C}$  (-20°C to +50°C)
- Two alarm temperature sensor inputs with adjustable alarm set points
- Alarm relay output, normally closed (will open on alarm); 1 A @ 24 VDC/120 VAC
- Adjustable Fan Speed






| TECHNICAL SPECIFICATIONS      |  |
|-------------------------------|--|
| <b>Power</b>                  |  |
| Voltage                       | 12 to 30 VDC   |
| Current                       | 15 A (up to 30 A with additional cooling)  |
| Power                         | Up to 900 W (with additional cooling)  |
| <b>User Interface</b>         |  |
|                               | Graphical User Interface PC program  |
|                               | External Potentiometer (optional)  |
| <b>Sensors</b>                |  |
| Temp 1 Sensor                 | NTC or PT1000  |
| Temp 2 Sensor                 | NTC  |
| Temp 3 Sensor                 | NTC  |
| Temp 4 Sensor                 | NTC (onboard)  |
| <b>Outputs</b>                |  |
| Thermoelectric Module         | PWM, 0-Supply Voltage @ $\leq 15$ A (30 A with additional cooling)   |
| Fan 1                         | Linearly Regulated: 0-Supply Voltage @ 2 A   |
| Fan 2                         | Linearly Regulated: 0-Supply Voltage @ 2 A   |
| Alarm Relay                   | 1 A @ 24 VDC/120 VAC (will open on alarm)  |
| LED                           | Regulator Voltages, Regulator Activity, Alarm, Relay Status  |
| <b>Alarms</b>                 |  |
| Low Voltage                   | If voltage is lower than programmed minimum level the outputs are shut down, the Alarm LED is turned on and the Alarm Relay is opened              |
| High Voltage                  | If voltage is higher than programmed maximum level the outputs are shut down, the Alarm LED is turned on and the Alarm Relay is opened             |
| <b>Thermoelectric current</b> |  |
| Over                          | If the Current is higher than the programmed maximum level the outputs are shut down, the Alarm LED is turned on and the Alarm Relay is opened     |
| Under                         | If the Current is lower than the programmed minimum level the outputs are shut down, the Alarm LED is turned on and the Alarm Relay is opened      |
| <b>Fans 1 &amp; 2 Current</b> |  |
| Over                          | If the Current is higher than the programmed maximum level the outputs are shut down, the Alarm LED is turned on and the Alarm Relay is opened     |
| Under                         | If the Current is lower than the programmed minimum level the outputs are shut down, the Alarm LED is turned on and the Alarm Relay is opened      |
| <b>Temp Sensors 1</b>         |  |
| Over                          | If the temperature is higher than the programmed maximum level turn on Alarm LED   |
| Under                         | If the temperature is lower than the programmed minimum level turn on the Alarm LED  |
| <b>Temp Sensors 2, 3, 4</b>   |  |
| Over                          | If the temperature is higher than the programmed maximum level the outputs are shut down, the Alarm LED is turned on and the Alarm Relay is opened |
| Under                         | If the temperature is lower than the programmed minimum level the outputs are shut down, the Alarm LED is turned on and the Alarm Relay is opened  |

## NOTES

1. NTC - 1 thermistor included
2. Mounting hardware is not included. Clearance holes available to accommodate M4 machine hardware or standoffs
3. Mating connectors are not included. For input power connections (SV21,SV31,SV33,SV22) use 0.250" fast-on style terminal For temperature sensors, external potentiometer and alarm relay use Molex KK 2695, 6471, or 7880 Series connectors. Au plating is recommended on mating pin terminals.

**ISOMETRIC DRAWINGS**

If applied voltage is less than 15VDC,  
the two pads must be shorted with solder.  
Must be opened if voltage >28VDC.

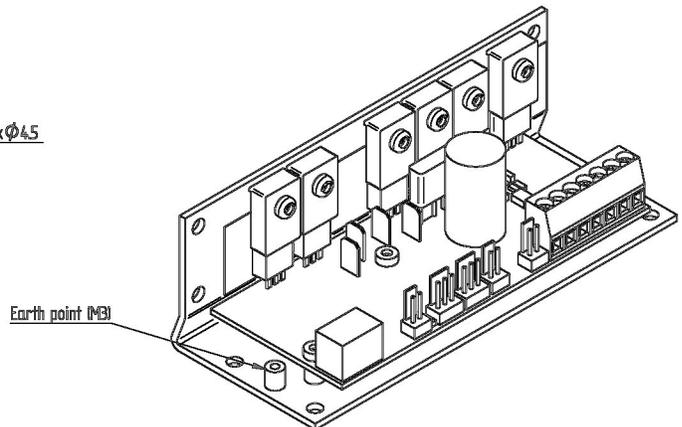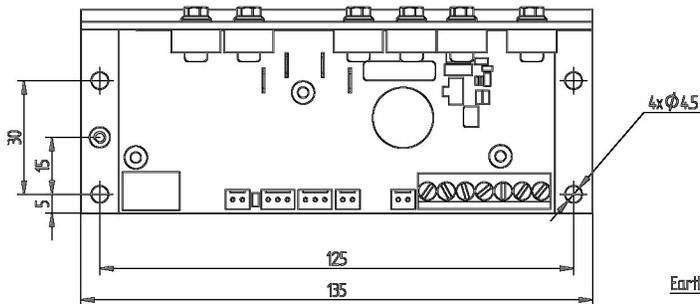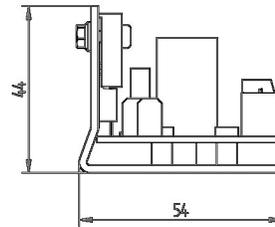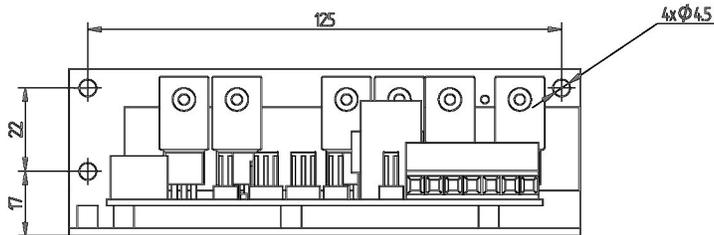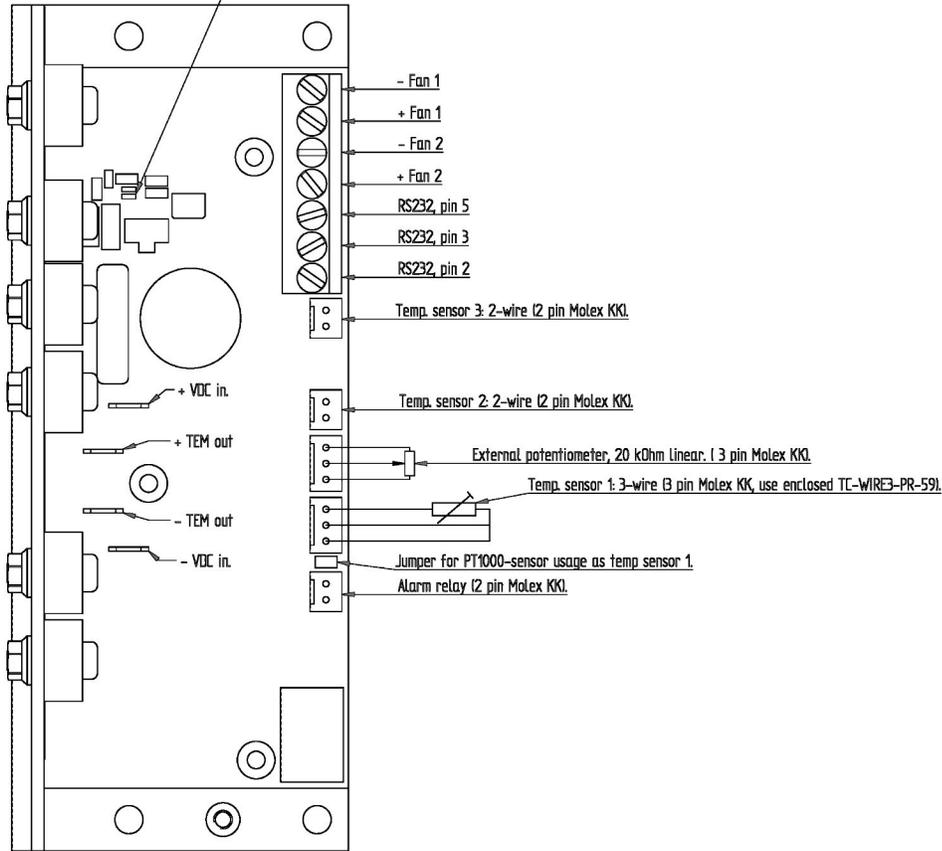

[tark-solutions.com](http://tark-solutions.com)

**TTS-TC-XX-PR-59-Datasheet-093025**

Any information furnished by Tark Thermal Solutions and its agents, whether in specifications, data sheets, product catalogues or otherwise, is believed to be (but is not warranted as being) accurate and reliable, is provided for information only and does not form part of any contract with Tark Thermal Solutions. All specifications are subject to change without notice. Tark Thermal Solutions' assumes no responsibility and disclaims all liability for losses or damages resulting from use of or reliance on this information. All Tark Thermal Solutions' products are sold subject to the Tark Thermal Solutions Terms and Conditions of sale (including Tark Thermal Solutions limited warranty) in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2025 Tark Thermal Solutions, Inc. All rights reserved.