

DeoxIT[®] D-Series D50W and D100W-3X3, WIPES (100%)

Contact Rejuvenator, Lubricant and Protectant

1. Part Nos.:

| Part No. | % DeoxIT | Container | Size | Flammable/Nonflammable |
|-----------|----------|-----------|--------------|------------------------|
| D50W | 100% | wipes | 1.75 x 1.75" | nonflammable |
| D100W-3X3 | 100% | wipes | 3.0 x 3.0" | nonflammable |

2. Formulation:

100% DeoxIT[®] D100L, D-Series
Wipe material: 100% cotton
Abrasion Resistant,
Lint-Free Wipe, Excellent Bi-directional strength.



3. Product Description:

Unique contact treatment, rejuvenator, conductivity enhancer and lubricant.
Removes oxidation and corrosion on metal surfaces.
Fills in microscopic gaps and reseals surface for better contact to enhance flow of electricity.
Chemically improves metal-to-metal connections and contacts. Improves connector performance/reliability.
Temperature* range: -34 to +200°C.

4. Features/Benefits:


100% Liquid, Safe on plastics.
DeoxIT[®] D100L concentrate has approximately 20% chemical deoxidizing action.
Excellent deoxidizing, good protection, no ozone depletion.
Improves conductivity and reduces intermittent connections.
Reduces arcing, RFI, wear and abrasion.
Cleaner Audio - Clearer Video - Reliable Data.



5. Which DeoxIT[®] product do I Use:

- ▶ Use **DeoxIT[®] D-Series** contact treatment on surfaces that have been in service or have visual signs of oxidation. Contains 20% active deoxidizer.
- ▶ Use **DeoxIT[®] Gold G-Series** conditioner on new surfaces, and gold plated surfaces. Ideal for preventing dendrite/fretting corrosion. Protects both surface and base metals. Ideal for critical applications. Contains >1% active deoxidizer.
- ▶ Use **DeoxIT[®] Shield S-Series** to protect surfaces from severe environments (humidity, salts, pollutants, sulfur, etc.). Use on clean surface. Contains 0% active deoxidizer.

* **NOTE:** Temperature ranges may vary depending on conditions.
On critical applications, independent testing is highly recommended.

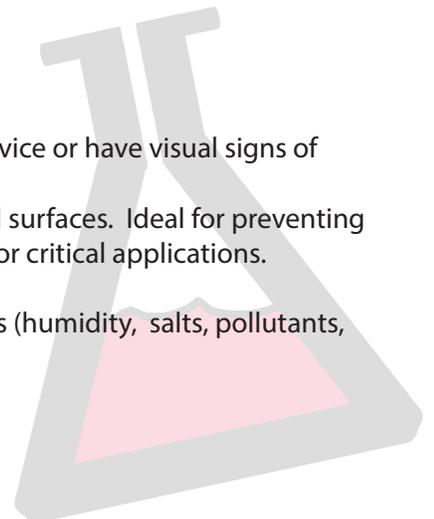



Audio/Video



Computers



Automotive



Communications



Marine



Electrical



Energy



Photography



Security




Medical



Avionics

6. Directions for Use - for all types of applicators:

1. Turn off, unplug the device.
2. Select the applicator (pen, wipes, needle, etc.) that is best for your application, see #8 below. Apply a small amount to the metal contact/connector surface.
3. Operate the part/device to help break up oxides and contamination. Wait a few minutes, then wipe off surface with clean lint-free cloth or swab to remove oxidation and contamination.
4. Re-apply DeoxIT® to metal surface and wipe off excess. **It is important to wipe off excess**, DeoxIT® works best when a thin coating is on metal surfaces. Wait two minutes before turning on equipment. **Test for compatibility before use.**
5. In extreme cases (severe oxidation or corrosion), you may need to leave DeoxIT® on overnight. If that is necessary; apply, then the following day remove any contaminants lifted by DeoxIT® with a lint free swab or cloth on accessible surfaces (If surface is not accessible, repeat step two above.). When surface is treated (no residue on the swab/cloth), finish with a short burst of DeoxIT®, then remove excess leaving a thin layer.
6. If you notice a green or black coloration on the surface (may take a few days) after applying DeoxIT®, this indicates dissolved oxidation (surface was severely oxidized). Follow step "2-5" above one more time.
7. **For extended protection:** After surface is treated, apply DeoxIT® Gold G-Series for indoor applications or DeoxIT® Shield S-Series for outdoor applications.
8. **Applicators:**
 - a) **Squeeze Tube** (#D100L-2C): Used by OEMs for maintenance kits. Provides small drop to surface.
 - b) **Pen - felt tip** (#D100P): Precision application, slight abrasive action. Provides liquid through felt tips. Replacement tips available.
 - c) **Oiler Pen** (#D100L-P6C): Very precise application of fluid. Provides pin-point application of liquid. Ideal for hard to reach applications.
 - d) **Oiler Squeeze Bottle** (#D100L-25C): Similar to Oiler Pen, except in squeeze bottle.
 - e) **Wipes** (#K-D1W-25 and K-D1W-50): Individual packaged wipes (thin paper material). For connections easily accessible and smooth surfaces, i.e. audio/video connections, batteries, etc.
 - f) **Wipes** (#D50W, D50FW, D100W-3X3, D100FW-3X3): Jar with wipes. For connections easily accessible accessible and smooth and irregular surfaces, i.e. edge connectors, industrial connections.
 - g) **Brush** (#D100L-2DB): Small 7.4 mL bottle with brush applicator. General purpose for applying liquid with a nylon brush. Ideal for applying to outer and inner surface with wiping action. Care should be taken to keep brush clean.
 - h) **Bulk Bottles** (#D100L-2, D100L-12, D100L-32): For production applications. Contact CAIG for information.
9. **NOTE:** For Field Service use, see Bulletin "Field Service 9-1-1" (<http://store.caig.com/s.nl/it.l/id.56/f>). For Manufacturing/OEMs see Bulletin "Manufacturing/OEM 9-1-1" (<http://store.caig.com/s.nl/it.l/id.61/f>)

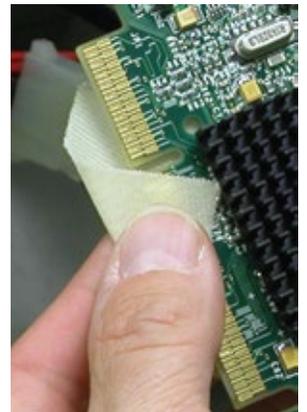



Audio/Video



Computers



Automotive



Communications



Marine



Electrical



Energy



Photography



Security



Medical



Avionics

7. Other Applicators:

| Part No. | % DeoxIT® | VOC (%) | Applicator | Size | Flammable/Nonflammable |
|--------------|-----------|---------|-------------|---------|------------------------|
| D5S-6 | 5% | 75% | spray | 142 g | flammable |
| DN5S-6N | 5% | 0% | spray | 163 g | nonflammable |
| DN5S-2N | 5% | 0% | mini-spray | 14 g | nonflammable |
| D100S-2 | 100% | 0% | spray | 57g | nonflammable |
| D5L-A (bulk) | 5% | 75% | bottle/drum | assort. | flammable |

8. DeoxIT® Essential Reference:

DeoxIT® D-Series - Brings old systems back to life!

DeoxIT® Gold G-Series - Maintains new system performance!

DeoxIT® Shield S-Series - Maintains new system performance for severe environments!

DeoxIT® Fader F-Series - Lubricate & protect conductive plastic and carbon compound faders!

9. Product Selection Guides:

DeoxIT® - Product Selection Guide

| | DeoxIT® D-Series | DeoxIT® Gold G-Series | DeoxIT® Gold GxL Gx-Series | DeoxIT® Gold Gx2 Gx2-Series | DeoxIT® Shield S-Series | DeoxIT® Fader F-Series |
|-----------------------------------|---------------------|-----------------------------|----------------------------------|-----------------------------------|-------------------------------|------------------------------|
| New Surfaces | | ✓ | ✓ | ✓ | ✓ | ✓ |
| * In Service / Used | ✓ | | | | | ✓ |
| Gold surfaces | | ✓ | ✓ | ✓ | | |
| Oxidation / corrosion visible | ✓ | | | | | |
| Conductive plastics | | | | | | ✓ |
| ** Outdoor / Severe environments | ✓ | | | | | ✓ |
| Deoxidizing / cleaning properties | 20% | 0.1% | 0.1% | 0.0% | 0.0% | 0.0% |
| Metal / Plastic surfaces | Yes | Yes | Yes | Yes | Yes | |
| Plastics compatibility | Excellent | Excellent | Excellent | Excellent | Excellent | Excellent |
| Temperature range (°C) | -34/200 | -45/200 | -45/240 | -45/300 | -34/210 | -26/150 |
| Stationary & moving surfaces | Yes | Yes | Yes | Yes | Yes | Yes |
| Seals & protects surface metal | Good | Excellent | Excellent | Excellent | Good | No |
| Seals & protects base metals | Fair | Excellent | Excellent | Excellent | Fair | No |

✓ All products are Nonflammable and RoHS Compliant


* In Service: Clean with DeoxIT® D-Series. For added protection, follow with DeoxIT® Gold (indoors), DeoxIT® Shield (outdoors) or DeoxIT® Grease (additional barrier).

DeoxIT® - Spray Selection Guide

| Product Series | FP | QD | NF | PC | VOC |
|--|----|----|----|----|--------------|
| Standard - 5% solution D5S-6, D5MS-15, G5S-6, G5MS-15, S5S-6, S5MS-15, F5S-6, F5MS-15 | ✓ | | | ✓ | 75% (588g/L) |
| N Series - 5% solution DN5S-6N, DN5S-2N, GN5S-6N, GN5S-2N, SN5S-6N, SN5S-2N | | ✓ | ✓ | ✓ | 0.0% |
| X Series - 5% solution GX5S-6N | | ✓ | ✓ | ✓ | 0.0% |
| 100% Spray solution D100S-2, G100S-2, F100S-L2 | | | ✓ | ✓ | 0.0% |

FP = Flushing properties QD = Quick dry / non drip

NF = Nonflammable PC = Plastics compatibility VOC = VOC (%)

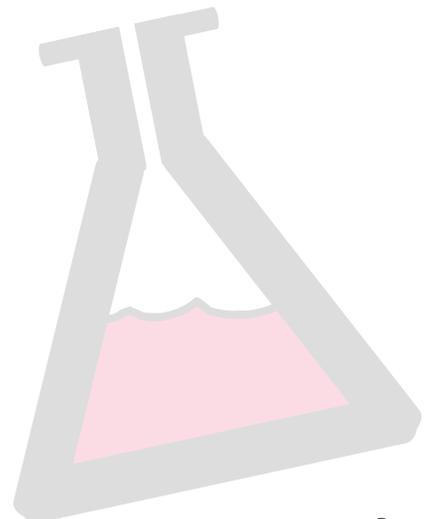



Audio/Video



Computers



Automotive



Communications



Marine



Electrical



Energy



Photography



Security



Medical



Avionics

10. Materials Compatibility (Plastics, Rubber, Elastomeric and Metals):

(Rating: Not compatible, Poor, Fair, Good, Excellent), (N/A = Not applicable (no solvents and propellants))

(* If the product is not 100% DeoxIT® then the package is rated before and after the solvents/propellants are applied to materials. Compatibility testing is always recommended)

| Material Name | Rating (*100% DeoxIT®) | Rating (*with solvents) |
|--------------------|------------------------|-------------------------|
| ABS | Excellent | N/A |
| Nylon | Excellent | N/A |
| Lexan | Excellent | N/A |
| HDPE | Good | N/A |
| LDPE | Good | N/A |
| C.E.Phenolic | Excellent | N/A |
| Epoxy | Excellent | N/A |
| Polycarbonate | Excellent | N/A |
| PMMA | Fair | N/A |
| POM | Excellent | N/A |
| PP | Excellent | N/A |
| PS | Fair | N/A |
| PTFE | Excellent | N/A |
| PVC | Excellent | N/A |
| TPE/Rubber/Varnish | Poor | N/A |

IMPORTANT:

Rating, 100% DeoxIT®: Any of the above that fall into the "Fair" and "Poor" categories should be thoroughly tested for compatibility. They may be compatible, however, it will depend on the manufacturing process of the materials. Acrylics, ABS, and polycarbonate, if under stress, may show slight cracking or crazing damage. Test for compatibility before use. On porous materials; i.e. wood, rubber, cloth, some phenolics, semi-cured materials, no liquid or solvents should be used. Occasionally, DeoxIT® will get onto unwanted surfaces, quickly wipe off surface and usually no damage will occur.

11. Shipping and Additional Information:

| | | |
|------------|----------------------|--------------------------|
| Hazardous: | No | No Shipping Restrictions |
| VOC (%): | Part No. D100L, 100% | No VOCs |

12. Other Information:

| | |
|-----------------|-----|
| RoHS Compliant: | YES |
| VOC Compliant: | YES |

MSDS Link, D100L

DeoxIT® Product Sheet:

CAIG Essential Guide:


WHY DeoxIT® is Different:

<http://caig.com/material-safety-data-sheets/>

<http://caig.com/technical-data/>

<http://caig.com/product-literature/#toggle-id-1>

<http://caig.com/product-literature/#toggle-id-5>

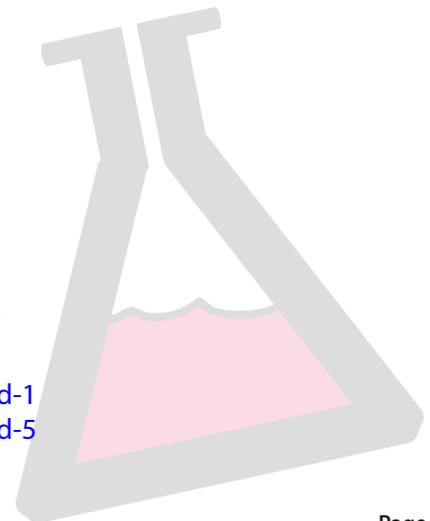



Audio/Video



Computers



Automotive



Communications



Marine



Electrical



Energy



Photography



Security



Medical



Avionics

13. MANUFACTURER DISCLAIMER:

To the best of our knowledge, the information contained herein is accurate. However, neither CAIG Laboratories, Inc., or any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. All materials may present unknown hazards and should be used with caution. In particular, improper use of our products and their inappropriate combination with other products and substances may produce harmful results which cannot be anticipated. Final determination of the suitability of any material is the sole responsibility of the user. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that may exist. All service performed on internal parts and equipment should be provided by qualified technicians.

14. Contact Information:



Website: www.caig.com
www.deoxit.com

General email: info@caig.com

Technical email: tech@caig.com

North America (Headquarters):

CAIG Laboratories, Inc.

12200 Thatcher Court

Poway, CA 92064 USA

Tel: (858) 486-8388

Fax: (858) 486-8398

Distributors (Domestic & International):

<http://store.caig.com/s.nl/sc.15/f>



CAIG Laboratories, Inc.

12200 Thatcher Court, Poway, CA 92064 U.S.A.

P: 858/486-8388 | **E:** info@caig.com

WEB: www.caig.com | www.deoxit.com

