






3-TERMINAL 1A POSITIVE ADJUSTABLE REGULATOR

The FR317P/D/DD/T is adjustable 3-terminal positive voltage regulator capable of supplying in excess of 1.5A over a 1.2V to 37V output range. This is exceptionally easy to use and require only two external resistors to set the output voltage. Further, it employ internal current limiting, thermal shutdown and safe area compensation.

FEATURES

- Adjustable output between 1.2V and 37V
- Guaranteed 1.5A output current
- Line regulation typically 0.01%/V
- Load regulation typically 0.1%
- 80dB ripple rejection (with Cadj)
- Internal thermal overload protection
- Internal short-circuit current limiting
- Output transistor safe-area compensation

BLOCK DIAGRAM

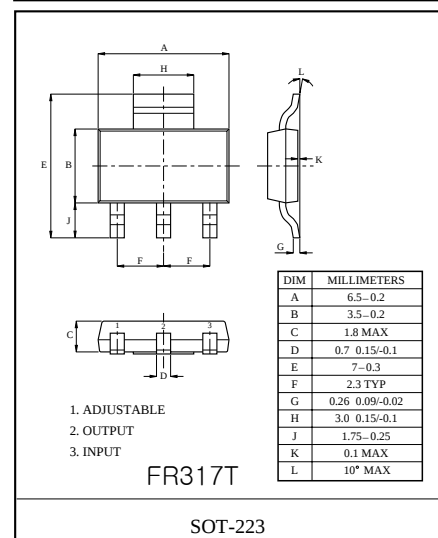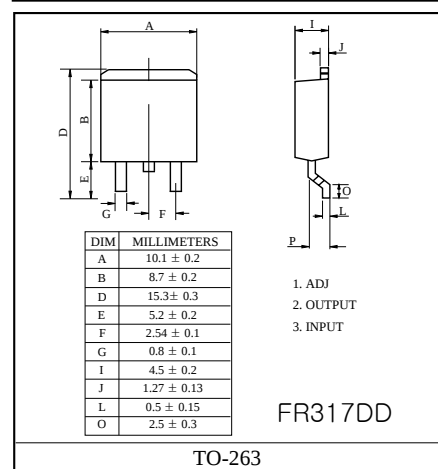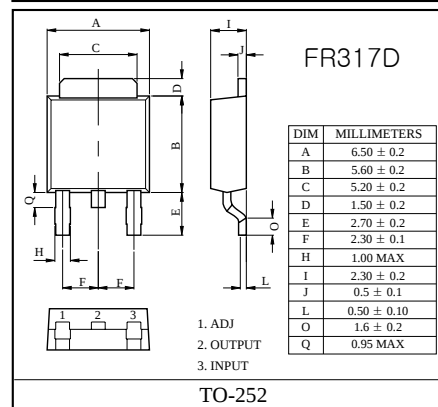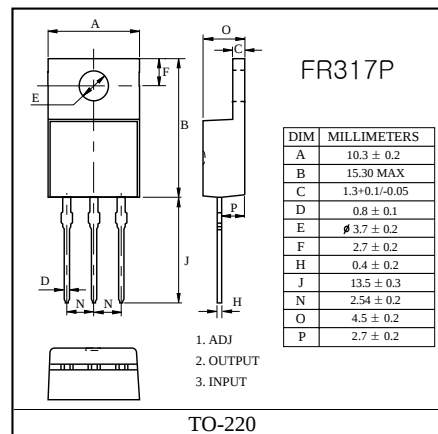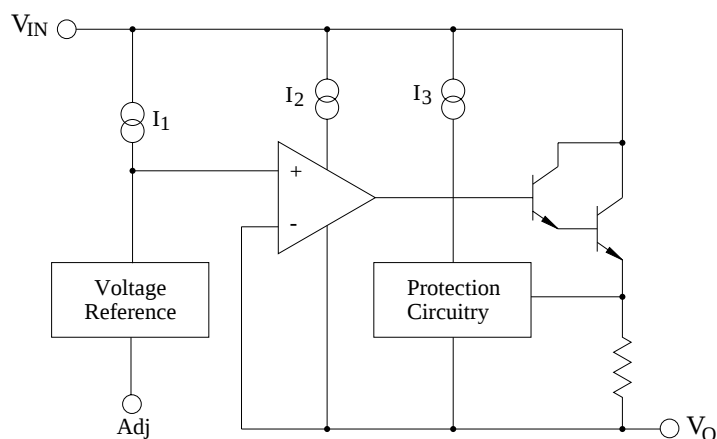

**MAXIMUM RATINGS (Ta=25°C)**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input-Output Voltage Differential	$V_{IN} - V_{OUT}$	40	V
Output Current	I_{OUT}	1.5	A
Power Dissipation (With infinite heat sink)	P_D	Internally limited	W
Operating Temperature	T_{opr}	-40 ~ 125	°C
Storage Temperature	T_{stg}	-65 ~ 150	°C
Lead Temperature	T_{lead}	230	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C)


($V_I - V_O = 5V$, $I_O = 0.5A$, $0^\circ C \leq T_j \leq 125^\circ C$, $I_{MAX} = 1.5A$, $P_{MAX} = 20W$, unless otherwise specified.)

CHARACTERISTIC	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Line Regulation	$\Delta V_{O(\text{Line})}$	Ta=25℃, Io=10mA	3V≤ VIN -VOUT≤ 40V	-	0.01	0.04	%/V
Load Regulation	$\Delta V_{O(\text{Load})}$	VIN ≥ 5V	10mA≤ IOUT≤ IMAX Ta=25℃	-	0.1	0.5	%/V
		VIN < 5V		-	5	25	mV
Adjustable Pin Current	IAdj			-	50	100	μA
Adjustable Pin Current Change	ΔIAdj	10mA≤ Io≤ IMAX, 2.5V≤ VIN -VOUT≤ 40V		-	0.2	5	μA
Reference Voltage	Vref	10mA≤ Io≤ IMAX, 3V≤ VIN -VOUT≤ 40V, P≤ PMAX		1.20	1.25	1.30	V
Temperature Stability	STT	TMin ≤ Tj≤ TMAX		-	1	-	%
Minimum Load Current to Maintain Regulation	Io(MIN)	(VIN -VOUT) = 40V		-	3.5	10	mA
Current Limit	Io(MAX)	(VIN -VOUT)≤15V, P≤ PMAX		1.5	2.2	-	A
		(VIN -VOUT)= 40V, P≤ PMAX, Ta=25℃		0.15	0.4	-	A
Output Noise Voltage	VNO	Ta=25℃, 10Hz ≤ f ≤10kHz, % of VOUT		-	0.003	-	%
Ripple Rejection Ratio	RR	Vo=10V, f=120Hz		-	65	-	dB
		CAdj=10μF		66	80	-	
Long Term Stability	ST	Ta=25℃ for end point measurement, 1000 Hr		-	0.3	1	℃ /W

Note : Load and line regulation are specified at constant junction temperature.

Change in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used. ($P_{MAX} = 20W$)

TYPICAL APPLICATION (PROGRAMMABLE REGULATOR)

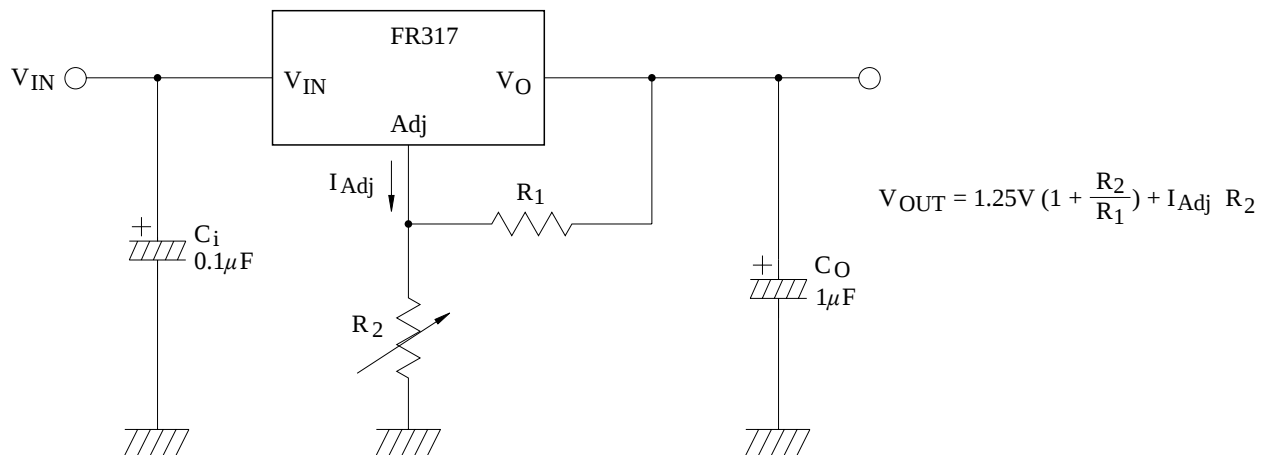


C_i is required when regulator is located an appreciable distance from power supply filter.


C_o is not needed for stability, however, in the range of $1\mu F$ to $100\mu F$ of aluminum or tantalum electrolytic are commonly used to provide improved output impedance and rejection of transients.

Since I_{Adj} is controlled to less than $100\mu A$, the error associated with this term is negligible in most applications.


Load Regulation

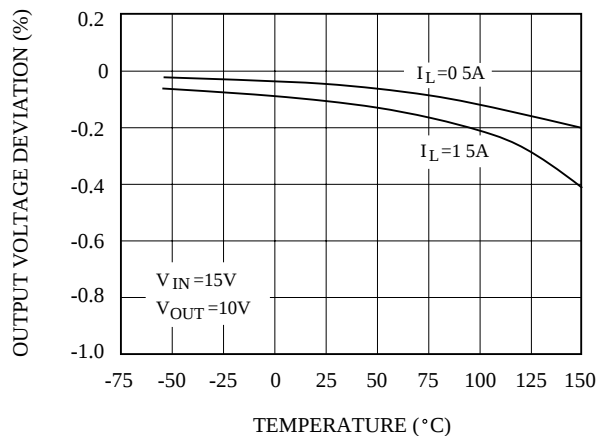


Current Limit

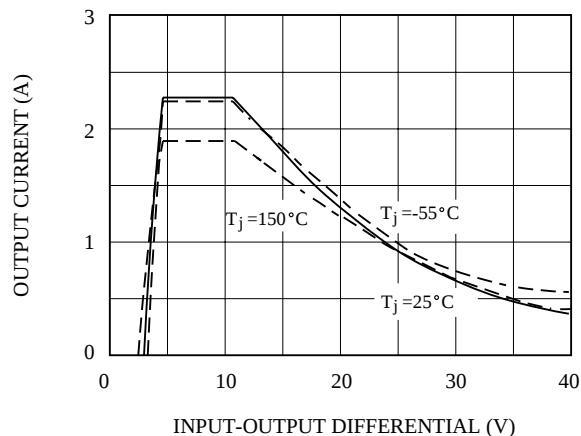


Adjustment Current

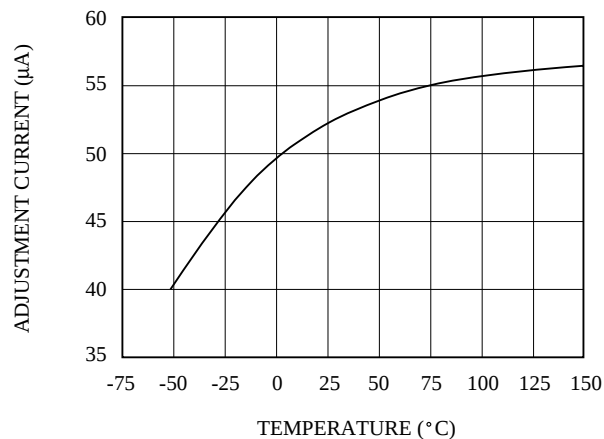


Dropout Voltage

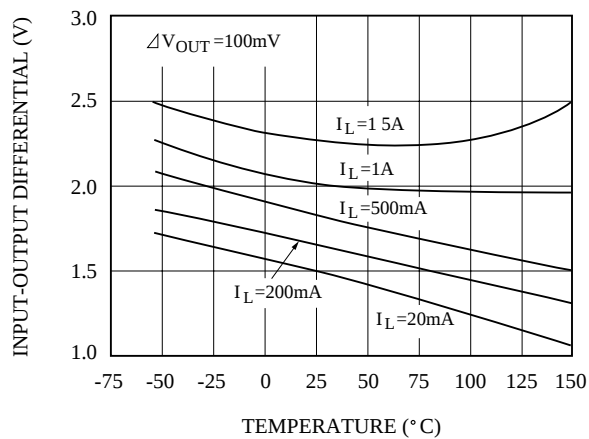


Temperature Stability

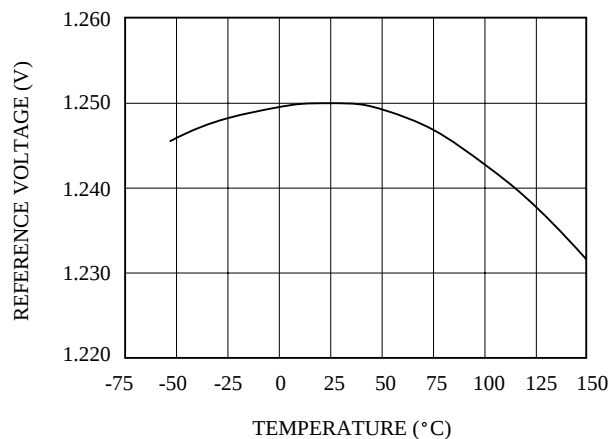


Minimum Operating Current

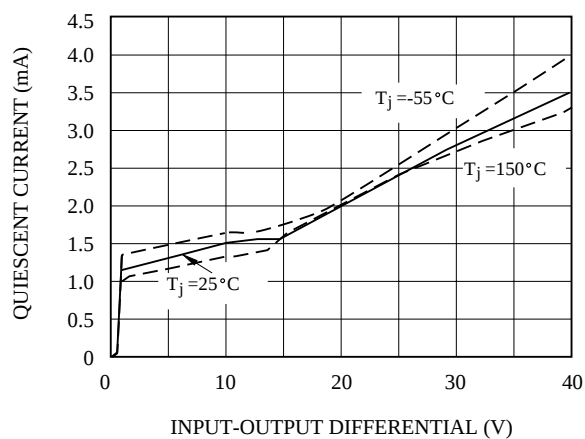


Ripple Rejection

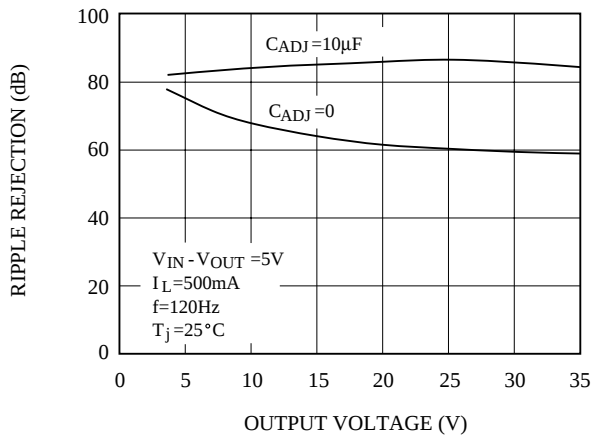


Ripple Rejection

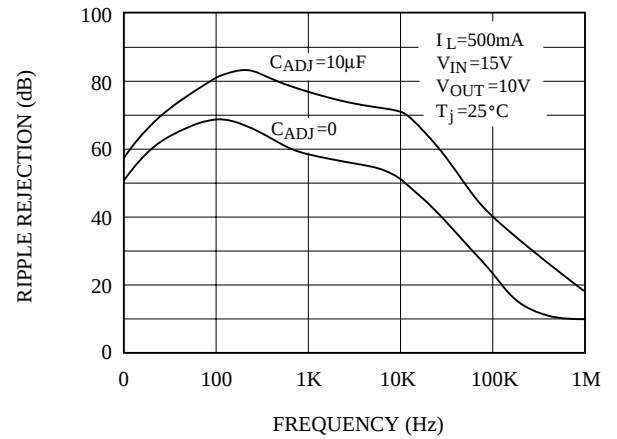


Ripple Rejection

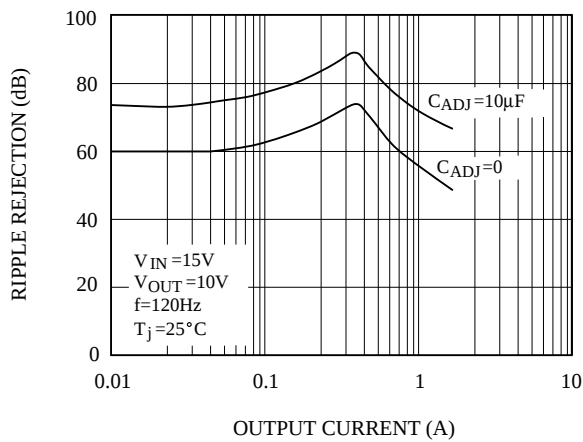

Output Impedance

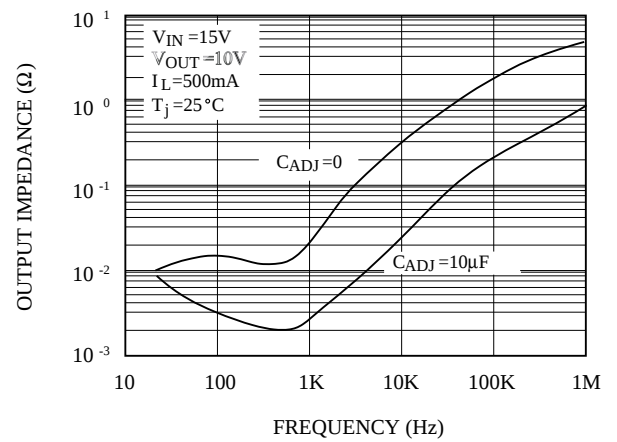

Line Transient Response

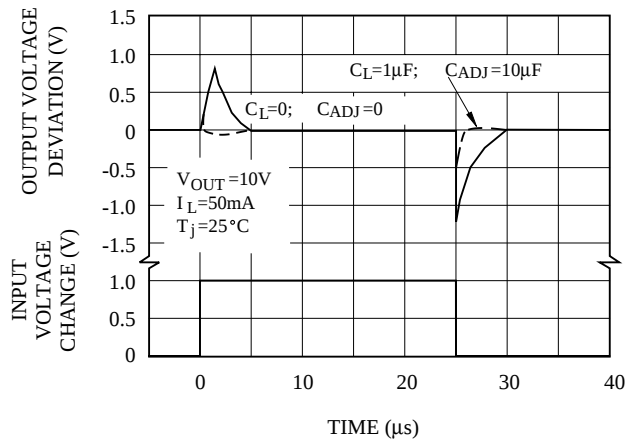

Line Transient Response

