

# USB Type-C® Analog Audio Switch with Protection Function

## FSA4480

### Description

FSA4480 is a high performance USB Type-C port multimedia switch which supports analog audio headsets. FSA4480 allows the sharing of a common USB Type-C port to pass USB2.0 signal, analog audio, sideband use wires and analog microphone signal. FSA4480 also supports high voltage on SBU port and USB port on USB Type-C receptacle side.

### Features

- Power Supply:  $V_{CC}$ , 2.7 V to 5.5 V
- USB High Speed (480 Mbps) Switch:
  - SDD<sub>21</sub> -3dB bandwidth: 950 MHz
  - 3  $\Omega$   $R_{ON}$  Typical
- Audio Switch
  - Negative Rail Capability: -3 V to +3 V
  - THD+N = -110 dB; 1  $V_{RMS}$ ,  $f = 20\text{ Hz} \sim 20\text{ kHz}$ , 32 W Load
  - 1  $\Omega$   $R_{ON}$  Typical
- High Voltage Protection
  - 20 V DC Tolerance on Connector Side Pins
  - Over Voltage Protection:  $V_{TH} = 5\text{ V}$  (Typ)
- OMTP and CTIA Pinout Support
- Support Audio Sense Path
- 25-Ball WLCSP Package (2.24 mm x 2.28 mm)

### Applications

- Mobile Phone, Tablet, Notebook PC, Media Player



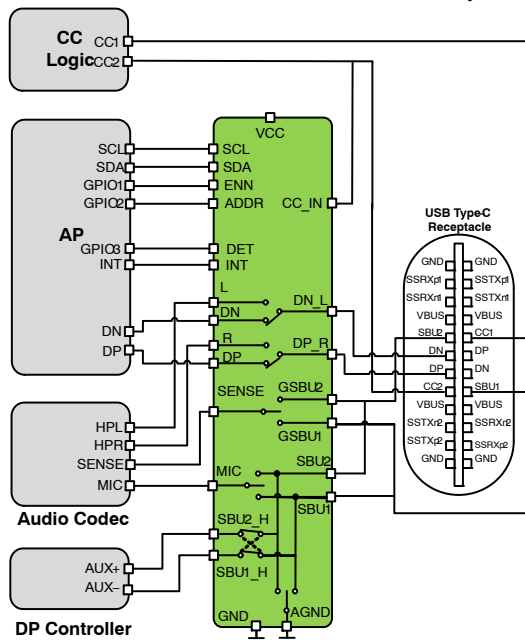


Figure 1. Application Block Diagram



WLCSP25  
CASE 567UZ

### MARKING DIAGRAM



- 6D = Specific Device Code  
 &K = 2-digits Lot Run Traceability Code  
 &2 = 2-digits Date Code (YW)  
 &Z = Assembly Location  
 J- = X- Coordinates with dash as separator\*  
 P = Y Coordinates\*  
 UU = Two Digit Wafer ID\*
- \*For onsemi internal use only.

### ORDERING INFORMATION

| Part Number | Package              | Marking |
|-------------|----------------------|---------|
| FSA4480UCX  | WLCSP25<br>(Pb-Free) | 6D      |

## PIN CONFIGURATION

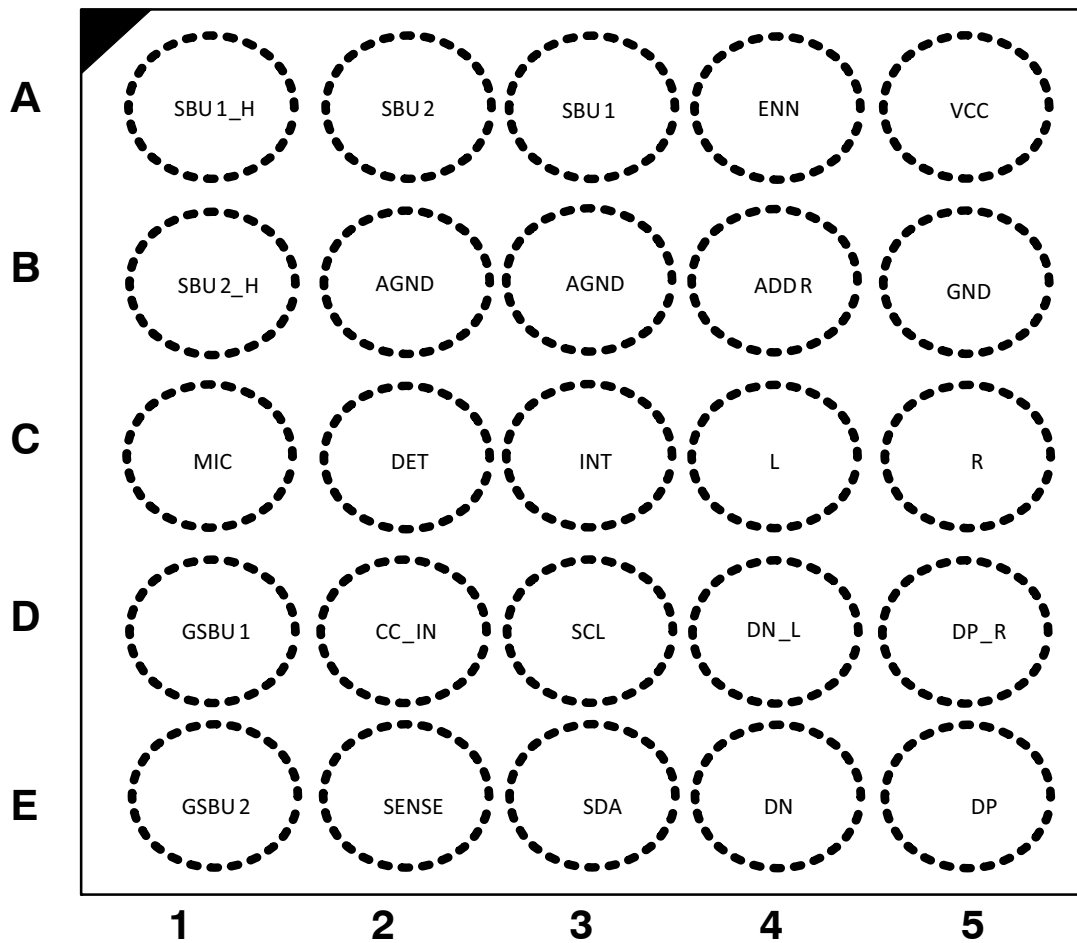


Figure 2. Pin Assignment (Top Through View)

Table 1. PIN DESCRIPTIONS

| No. | Pin | Name   | Description                                                                     |
|-----|-----|--------|---------------------------------------------------------------------------------|
| 1   | A5  | VCC    | Power Supply (2.7 to 5.5 V)                                                     |
| 2   | B5  | GND    | Chip ground                                                                     |
| 3   | D5  | DP_R   | USB/Audio Common Connector                                                      |
| 4   | D4  | DN_L   | USB/Audio Common Connector                                                      |
| 5   | E5  | DP     | USB Data (Differential +)                                                       |
| 6   | E4  | DN     | USB Data (Differential -)                                                       |
| 7   | C5  | R      | Audio – Right Channel                                                           |
| 8   | C4  | L      | Audio – Left Channel                                                            |
| 9   | A3  | SBU1   | Sideband use wire 1                                                             |
| 10  | A2  | SBU2   | Sideband use wire 2                                                             |
| 11  | C1  | MIC    | Microphone signal                                                               |
| 12  | B2  | AGND   | Audio signal ground                                                             |
| 13  | B3  | AGND   | Audio signal ground                                                             |
| 14  | E2  | SENSE  | Audio ground reference output                                                   |
| 15  | C3  | INT    | I <sup>2</sup> C Interrupt output, active low (open drain)                      |
| 16  | D2  | CC_IN  | Audio accessory attachment detection input                                      |
| 17  | D1  | GSDU1  | Audio sense path 1 to headset jack GND                                          |
| 18  | E1  | GSDU2  | Audio sense path 2 to headset jack GND                                          |
| 19  | C2  | DET    | Push-pull output. When CC_IN > 1.5 V, DET is low and CC_IN < 1.2 V, DET is high |
| 20  | D3  | SCL    | I <sup>2</sup> C clock                                                          |
| 21  | E3  | SDA    | I <sup>2</sup> C data                                                           |
| 22  | B1  | SBU2_H | Host Side Sideband Use Wire 2                                                   |
| 23  | A1  | SBU1_H | Host Side Sideband Use Wire 1                                                   |
| 24  | A4  | ENN    | Chip Enable, active low, internal pull-down by 470 k $\Omega$                   |
| 25  | B4  | ADDR   | I <sup>2</sup> C slave address pin                                              |

Table 2. ABSOLUTE MAXIMUM RATINGS

| Symbol                  | Parameter                                                                                                |                                                                                 | Min. | Max. | Unit |
|-------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|------|------|
| V <sub>CC</sub>         | Supply Voltage from VCC                                                                                  |                                                                                 | −0.5 | 6.5  | V    |
| V <sub>CC_IN</sub>      | V <sub>CC_IN</sub> to GND                                                                                |                                                                                 | −0.5 | 20   | V    |
| V <sub>SW_C</sub>       | V <sub>DP_R</sub> to GND, V <sub>DN_L</sub> to GND                                                       |                                                                                 | −3.5 | 20   | V    |
| V <sub>SW_USB</sub>     | V <sub>DP</sub> to GND, V <sub>DN</sub> to GND                                                           |                                                                                 | −0.5 | 6.5  | V    |
| V <sub>SW_Audio</sub>   | V <sub>L</sub> to GND, V <sub>R</sub> to GND                                                             |                                                                                 | −3.6 | 6.5  | V    |
| V <sub>V_SBU/GSBU</sub> | V <sub>SBU1</sub> to GND, V <sub>SBU2</sub> to GND, V <sub>GSBU1</sub> to GND, V <sub>GSBU1</sub> to GND |                                                                                 | −0.5 | 20   | V    |
| V <sub>VSBU_H</sub>     | V <sub>SBU1_H</sub> to GND, V <sub>SBU2_H</sub> to GND                                                   |                                                                                 | −0.5 | 6.5  | V    |
| V <sub>I/O</sub>        | SENSE, MIC, DET, INT, to GND                                                                             |                                                                                 | −0.5 | 6.5  | V    |
| V <sub>CNTRL</sub>      | Control Input Voltage                                                                                    | SDA, SCL, ENN, ADDR                                                             | −0.5 | 6.5  | V    |
| I <sub>SW_Audio</sub>   | Switch I/O Current, Audio Path                                                                           |                                                                                 | −250 | 250  | mA   |
| I <sub>SW_USB</sub>     | Switch I/O Current, USB Path                                                                             |                                                                                 | −    | 100  | mA   |
| I <sub>SW_MIC</sub>     | Switch I/O Current, MIC to SBU1 or SBU2                                                                  |                                                                                 | −    | 50   | mA   |
| I <sub>SW_SBU</sub>     | Switch I/O Current, SBUx to SBUx_H                                                                       |                                                                                 | −    | 50   | mA   |
| I <sub>SW_SENSE</sub>   | Switch I/O Current, SENSE to GSBU1 or GSBU2                                                              |                                                                                 | −    | 100  | mA   |
| I <sub>SW_AGND</sub>    | Switch I/O Current, AGND to SBU1 or SBU2                                                                 |                                                                                 | −    | 500  | mA   |
| I <sub>IK</sub>         | DC Input Diode Current                                                                                   |                                                                                 | −50  | −    | mA   |
| ESD                     | Human Body Model, ANSI/ESDA/JEDEC JS-001-2012                                                            | Connector side and power pins: VCC, SBU1, SBU2, DP_R, DN_L, GSBU1, GSBU2, CC_IN | 4    | −    | kV   |
| ESD                     | Human Body Model, ANSI/ESDA/JEDEC JS-001-2012                                                            | Host side pins: the rest pins                                                   | 2    | −    | kV   |
| ESD                     | Charged Device Model, JEDEC: JESD22-C101                                                                 |                                                                                 | 1    | −    | kV   |
| T <sub>A</sub>          | Absolute Maximum Operating Temperature                                                                   |                                                                                 | −40  | 85   | °C   |
| T <sub>STG</sub>        | Storage Temperature                                                                                      |                                                                                 | −65  | 150  | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Table 3. RECOMMENDED OPERATING CONDITIONS

| Symbol                               | Parameter                                                                        | Min. | Typ. | Max.     | Unit |
|--------------------------------------|----------------------------------------------------------------------------------|------|------|----------|------|
| <b>POWER</b>                         |                                                                                  |      |      |          |      |
| $V_{CC}$                             | Supply Voltage                                                                   | 2.7  | –    | 5.5      | V    |
| <b>USB SWITCH</b>                    |                                                                                  |      |      |          |      |
| $V_{SW\_USB}$                        | $V_{DP}$ to GND, $V_{DN}$ to GND, $V_{DP\_R}$ to GND, $V_{DN\_L}$ to GND         | 0    | –    | 3.6      | V    |
| <b>AUDIO SWITCH</b>                  |                                                                                  |      |      |          |      |
| $V_{SW\_Audio}$                      | $V_{DP\_R}$ to GND, $V_{DN\_L}$ to GND, $V_L$ to GND, $V_R$ to GND               | –3.6 | –    | 3.6      | V    |
| <b>MIC SWITCH</b>                    |                                                                                  |      |      |          |      |
| $V_{VSBU\_MIC}$                      | $V_{SBU1}$ to GND, $V_{SBU2}$ to GND, $V_{MIC}$ to GND                           | 0    | –    | 3.6      | V    |
| <b>SENSE SWITCH</b>                  |                                                                                  |      |      |          |      |
| $V_{VGSBU\_SEN}$                     | $V_{GSBU1}$ to GND, $V_{GSBU2}$ to GND, $V_{SENSE}$ to GND                       | 0    | –    | 3.6      | V    |
| <b>SBU TO SBUX_H SWITCH</b>          |                                                                                  |      |      |          |      |
| $V_{VGSBU}$                          | $V_{SBU1}$ to GND, $V_{SBU2}$ to GND, $V_{SBU1\_H}$ to GND, $V_{SBU2\_H}$ to GND | 0    | –    | 3.6      | V    |
| <b>CC_IN PIN</b>                     |                                                                                  |      |      |          |      |
| $V_{CC\_IN}$                         | $V_{CC\_IN}$ to GND                                                              | 0    | –    | 5.5      | V    |
| <b>CONTROL VOLTAGE (ENN/SDA/SCL)</b> |                                                                                  |      |      |          |      |
| $V_{IH}$                             | Input Voltage High                                                               | 1.3  | –    | $V_{CC}$ | V    |
| $V_{IL}$                             | Input Voltage Low                                                                | –    | –    | 0.5      | V    |
| <b>OPERATING TEMPERATURE</b>         |                                                                                  |      |      |          |      |
| $T_A$                                | Ambient Operating Temperature                                                    | –40  | 25   | +85      | °C   |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

**Table 4. DC ELECTRICAL CHARACTERISTICS**(V<sub>CC</sub> = 2.7 V to 5.5 V, V<sub>CC</sub> (Typ.) = 3.3 V, T<sub>A</sub> = -40°C to 85°C, and T<sub>A</sub> (Typ.) = 25°C, unless otherwise specified.)

| Symbol           | Parameter         | Condition                                                | Power                            | Min. | Typ. | Max. | Unit |
|------------------|-------------------|----------------------------------------------------------|----------------------------------|------|------|------|------|
| I <sub>CC</sub>  | Supply Current    | USB switches on, SBUx to SBUx_H switches on              | V <sub>CC</sub> : 2.7 V to 5.5 V | -    | -    | 65   | μA   |
|                  |                   | Audio switches on, MIC switch on and Audio GND switch on |                                  | -    | -    | 60   | μA   |
| I <sub>CCZ</sub> | Quiescent Current | ENN = L, 04H'b7 = 0                                      |                                  | -    | -    | 5    | μA   |

**USB/AUDIO COMMON PINS: DP/R, DN\_L**

|                      |                                            |                            |                                  |      |     |     |    |
|----------------------|--------------------------------------------|----------------------------|----------------------------------|------|-----|-----|----|
| I <sub>OZ</sub>      | Off Leakage Current of DP_R and DN_L       | DN_L, DP_R = -3 V to 3.6 V | V <sub>CC</sub> : 2.7 V to 5.5 V | -3.0 | -   | 3.0 | μA |
| I <sub>OFF</sub>     | Power-Off Leakage Current of DP_R and DN_L | DN_L, DP_R = 0 V to 3.6 V  | Power off                        | -3.0 | -   | 3.0 | μA |
| V <sub>OV_TRIP</sub> | Input OVP Lockout                          | Rising edge                | V <sub>CC</sub> : 2.7 V to 5.5 V | 4.5  | 5   | 5.3 | V  |
| V <sub>OV_HYS</sub>  | Input OVP Hysteresis                       |                            |                                  | -    | 0.3 | -   | V  |

**AUDIO SWITCH**

|                       |                                                        |                                                         |                                  |      |     |     |    |
|-----------------------|--------------------------------------------------------|---------------------------------------------------------|----------------------------------|------|-----|-----|----|
| I <sub>ON</sub>       | On Leakage Current of Audio Switch                     | DN_L, DP_R = -3 V to 3.0 V, DP, DN, R, L = Float        | V <sub>CC</sub> : 2.7 V to 5.5 V | -2.5 | -   | 2.5 | μA |
| I <sub>OFF</sub>      | Power-Off Leakage Current of L and R                   | L, R = 0 V to 3 V; DP_R, DN_L = Float                   | Power off                        | -1.0 | -   | 1.0 | μA |
| R <sub>ON_AUDIO</sub> | Audio Switch On Resistance                             | I <sub>SW</sub> = 100 mA, V <sub>SW</sub> = -3 V to 3 V | V <sub>CC</sub> : 2.7 V to 5.5 V | -    | 1.0 | 2.1 | Ω  |
| R <sub>SHUNT</sub>    | Pull Down Resistor on R/L Pin when Audio Switch is Off | L = R = 3 V                                             |                                  | 6    | 10  | 14  | kΩ |

**USB SWITCH**

|                     |                                        |                                                 |                                  |      |     |     |    |
|---------------------|----------------------------------------|-------------------------------------------------|----------------------------------|------|-----|-----|----|
| I <sub>ON</sub>     | On Leakage Current of USB Switch       | DN_L, DP_R = 0 V to 3.6 V, DP, DN, R, L = Float | V <sub>CC</sub> : 2.7 V to 5.5 V | -3.0 | -   | 3.0 | μA |
| I <sub>OZ</sub>     | Off Leakage Current of DP and DN       | DN, DP = 0 V to 3.6 V                           |                                  | -3.0 | -   | 3.0 | μA |
| I <sub>OFF</sub>    | Power-Off Leakage Current of DP and DN | DN, DP = 0 V to 3.6 V                           | Power off                        | -3.0 | -   | 3.0 | μA |
| R <sub>ON_USB</sub> | USB Switch On Resistance               | I <sub>SW</sub> = 8 mA, V <sub>SW</sub> = 0.4 V | V <sub>CC</sub> : 2.7 V to 5.5 V | -    | 3.0 | 5.2 | Ω  |

**SENSE SWITCH**

|                       |                                    |                                                 |                                  |      |      |      |    |
|-----------------------|------------------------------------|-------------------------------------------------|----------------------------------|------|------|------|----|
| I <sub>ON</sub>       | Sense Path Leakage Current         | GSBUx = 0 V to 1 V, SENSE is floating           | V <sub>CC</sub> : 2.7 V to 5.5 V | -2.0 | -    | 2.0  | μA |
| R <sub>ON_SENSE</sub> | SENSE Switch On Resistance         | I <sub>SW</sub> = 100 mA, V <sub>SW</sub> = 1 V | V <sub>CC</sub> : 2.7 V to 5.5 V | 0.20 | 0.30 | 0.40 | Ω  |
| I <sub>OZ</sub>       | Off Leakage Current of SENSE       | Sense = 0 V to 1.0 V                            |                                  | -2.0 | -    | 2.0  | μA |
|                       | Off Leakage Current of GSBUX       | GSBUx = 0 V to 1.0 V                            |                                  | -2.0 | -    | 2.0  | μA |
|                       |                                    | GSBUx = 1 V to 3.6 V                            |                                  | -3.0 | -    | 3.0  |    |
| I <sub>OFF</sub>      | Power-Off Leakage Current of SENSE | Sense = 0 V to 1.0 V                            | Power off                        | -2.0 | -    | 2.0  | μA |
|                       | Power-Off Leakage Current of GSBUX | GSBUx = 0 V to 3.6 V                            |                                  | -3.0 | -    | 3.0  |    |

**Table 4. DC ELECTRICAL CHARACTERISTICS** (continued)(V<sub>CC</sub> = 2.7 V to 5.5 V, V<sub>CC</sub> (Typ.) = 3.3 V, T<sub>A</sub> = -40°C to 85°C, and T<sub>A</sub> (Typ.) = 25°C, unless otherwise specified.)

| Symbol | Parameter | Condition | Power | Min. | Typ. | Max. | Unit |
|--------|-----------|-----------|-------|------|------|------|------|
|--------|-----------|-----------|-------|------|------|------|------|

**SENSE SWITCH**

|                      |                               |             |                                  |     |     |     |   |
|----------------------|-------------------------------|-------------|----------------------------------|-----|-----|-----|---|
| V <sub>OV_TRIP</sub> | Input OVP Lockout on GSBUX    | Rising edge | V <sub>CC</sub> : 2.7 V to 5.5 V | 4.5 | 5   | 5.3 | V |
| V <sub>OV_HYS</sub>  | Input OVP Hysteresis of GSBUX |             |                                  | –   | 0.3 | –   | V |

**SBUX PINS**

|                      |                                     |                     |                                  |      |     |     |    |
|----------------------|-------------------------------------|---------------------|----------------------------------|------|-----|-----|----|
| I <sub>OZ</sub>      | Off Leakage Current of SBUX         | SBUX = 0 V to 3.6 V | V <sub>CC</sub> : 2.7 V to 5.5 V | –3.0 | –   | 3.0 | μA |
| I <sub>OFF</sub>     | Power-Off Leakage Current Port SBUX | SBUX = 0 V to 3.6 V | Power off                        | –3.0 | –   | 3.0 | μA |
| V <sub>OV_TRIP</sub> | Input OVP Lockout                   | Rising edge         | V <sub>CC</sub> : 2.7 V to 5.5 V | 4.5  | 5   | 5.3 | V  |
| V <sub>OV_HYS</sub>  | Input OVP Hysteresis                |                     |                                  | –    | 0.3 | –   | V  |

**MIC SWITCH**

|                     |                                  |                                                  |                                  |      |     |     |    |
|---------------------|----------------------------------|--------------------------------------------------|----------------------------------|------|-----|-----|----|
| I <sub>ON</sub>     | On Leakage Current of MIC Switch | SBUX = 0 V to 3.6 V, MIC is floating             | V <sub>CC</sub> : 2.7 V to 5.5 V | –3.0 | –   | 3.0 | μA |
| I <sub>OZ</sub>     | Off Leakage Current of MIC       | MIC = 0 V to 3.6 V                               |                                  | –1.0 | –   | 1.0 | μA |
| I <sub>OFF</sub>    | Power Off Leakage Current of MIC | MIC = 0 V to 3.6 V                               | Power off                        | –1.0 | –   | 1.0 | μA |
| R <sub>ON_MIC</sub> | MIC Switch On Resistance         | I <sub>sw</sub> = 30 mA, V <sub>sw</sub> = 3.6 V | V <sub>CC</sub> : 2.7 V to 5.5 V | 1.7  | 3.0 | 3.9 | Ω  |

**SBUX\_H SWITCH**

|                     |                                     |                                                         |                                  |      |     |     |    |
|---------------------|-------------------------------------|---------------------------------------------------------|----------------------------------|------|-----|-----|----|
| I <sub>ON</sub>     | On Leakage Current of SBUX_H Switch | SBUX = 0 V to 3.6 V, SBUX_H is floating                 | V <sub>CC</sub> : 2.7 V to 5.5 V | –3.0 | –   | 3.0 | μA |
| I <sub>OZ</sub>     | Off Leakage of SBUX_H               | SBUX_H = 0 V to 3.6 V                                   |                                  | –1   | –   | 1   | μA |
| I <sub>OFF</sub>    | Power Off Leakage Current of SBUX_H | SBUX_H = 0 V to 3.6 V                                   | Power off                        | –1.0 | –   | 1.0 | μA |
| R <sub>ON_SBU</sub> | SBUX_H Switch On Resistance         | I <sub>sw</sub> = 30 mA, V <sub>SW</sub> = 0 V to 3.6 V | V <sub>CC</sub> : 2.7 V to 5.5 V | 1.5  | 3.0 | 3.5 | Ω  |

**AUDIO GROUND SWITCH: PIN: AGND TO SBUX**

|                      |                           |                                      |                                  |    |    |    |    |
|----------------------|---------------------------|--------------------------------------|----------------------------------|----|----|----|----|
| R <sub>ON_AGND</sub> | AGND Switch On Resistance | I <sub>SOURCE</sub> = 100 mA on SBUX | V <sub>CC</sub> : 2.7 V to 5.5 V | 30 | 50 | 90 | mΩ |
|----------------------|---------------------------|--------------------------------------|----------------------------------|----|----|----|----|

**CC\_IN PIN**

|                   |                        |                      |                                  |   |     |     |    |
|-------------------|------------------------|----------------------|----------------------------------|---|-----|-----|----|
| V <sub>TH_L</sub> | Input Low Threshold    |                      | V <sub>CC</sub> : 2.7 V to 5.5 V | – | 1.2 | –   | V  |
| V <sub>TH_H</sub> | Input High Threshold   |                      |                                  | – | 1.5 | –   | V  |
| I <sub>IN</sub>   | Input Leakage of CC_IN | CC_IN = 0 V to 5.5 V |                                  | – | –   | 1.0 | μA |

**INT, DET PINS**

|                 |                            |                        |                                  |     |     |     |   |
|-----------------|----------------------------|------------------------|----------------------------------|-----|-----|-----|---|
| V <sub>OH</sub> | Output High for DET        | I <sub>O</sub> = –2 mA | V <sub>CC</sub> : 2.7 V to 5.5 V | 1.5 | 1.8 | 2   | V |
| V <sub>OL</sub> | Output Low for DET and INT | I <sub>O</sub> = 2 mA  |                                  | –   | –   | 0.4 | V |

**Table 4. DC ELECTRICAL CHARACTERISTICS** (continued)(V<sub>CC</sub> = 2.7 V to 5.5 V, V<sub>CC</sub> (Typ.) = 3.3 V, T<sub>A</sub> = -40°C to 85°C, and T<sub>A</sub> (Typ.) = 25°C, unless otherwise specified.)

| Symbol | Parameter | Condition | Power | Min. | Typ. | Max. | Unit |
|--------|-----------|-----------|-------|------|------|------|------|
|--------|-----------|-----------|-------|------|------|------|------|

**ADDR PIN**

|                 |                       |                               |                                  |     |   |      |    |
|-----------------|-----------------------|-------------------------------|----------------------------------|-----|---|------|----|
| V <sub>IH</sub> | Input voltage High    |                               | V <sub>CC</sub> : 2.7 V to 5.5 V | 1.3 | – | –    | V  |
| V <sub>IL</sub> | Input voltage Low     |                               |                                  | –   | – | 0.45 | V  |
| I <sub>IN</sub> | Control Input Leakage | ADDR = 0 V to V <sub>CC</sub> |                                  | –1  | – | 1    | μA |

**ENN PIN**

|                 |                             |  |                                  |     |     |      |    |
|-----------------|-----------------------------|--|----------------------------------|-----|-----|------|----|
| V <sub>IH</sub> | Input Voltage High          |  | V <sub>CC</sub> : 2.7 V to 5.5 V | 1.3 | –   | –    | V  |
| V <sub>IL</sub> | Input Voltage Low           |  |                                  | –   | –   | 0.45 | V  |
| R <sub>PD</sub> | Internal Pull Down Resistor |  |                                  | –   | 470 | –    | kΩ |

**SDS, SCL PINS**

|                    |                                   |                            |                                  |     |   |     |    |
|--------------------|-----------------------------------|----------------------------|----------------------------------|-----|---|-----|----|
| V <sub>ILI2C</sub> | Low-Level Input Voltage           |                            | V <sub>CC</sub> : 2.7 V to 5.5 V | –   | – | 0.4 | V  |
| V <sub>IHI2C</sub> | High-Level Input Voltage          |                            |                                  | 1.2 | – | –   | V  |
| I <sub>I2C</sub>   | Input Current of SDA and SCL Pins | SCL/SDA = 0 V to 3.6 V     |                                  | –2  | – | 2   | μA |
| V <sub>OLSDA</sub> | Low-Level Output Voltage          | I <sub>OL</sub> = 2 mA     |                                  | –   | – | 0.3 | V  |
| I <sub>OLSDA</sub> | Low-Level Output Current          | V <sub>OLSDA</sub> = 0.2 V |                                  | 10  | – | –   | mA |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

**Table 5. AC ELECTRICAL CHARACTERISTICS**(V<sub>CC</sub> = 2.7 V to 5.5 V, V<sub>CC</sub> (Typ.) = 3.3 V, T<sub>A</sub> = -40°C to 85°C, and T<sub>A</sub> (Typ.) = 25°C, unless otherwise specified.)

| Symbol                     | Parameter                                                                | Condition                                                                                        | Power                   | Min. | Typ. | Max. | Unit |     |
|----------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------|------|------|------|------|-----|
| AUDIO SWITCH               |                                                                          |                                                                                                  |                         |      |      |      |      |     |
| t <sub>delay</sub>         | Audio Switch Turn On Delay Time                                          | DP_R = DN_L = 1 V,<br>R <sub>L</sub> = 32 Ω                                                      | V <sub>CC</sub> = 3.3 V | –    | 65   | –    | μs   |     |
| t <sub>rise</sub>          | Audio Switch Turn On Rising Time<br>(Note 1)                             | DP_R = DN_L = 1 V,<br>R <sub>L</sub> = 32 Ω                                                      |                         | –    | 240  | –    | μs   |     |
| t <sub>OFF</sub>           | Audio Switch Turn Off Time                                               | DP_R = DN_L = 1 V,<br>R <sub>L</sub> = 32 Ω                                                      |                         | –    | 15   | –    | μs   |     |
| X <sub>TALK</sub>          | Cross Talk (Adjacent)                                                    | f = 1 kHz, R <sub>L</sub> = 50 Ω,<br>V <sub>SW</sub> = 1 V <sub>RMS</sub>                        |                         | –    | –100 | –    | dB   |     |
| BW                         | –3 dB Bandwidth                                                          | R <sub>L</sub> = 50 Ω                                                                            |                         | –    | 600  | –    | MHz  |     |
| O <sub>IRR</sub>           | Off Isolation                                                            | F = 1 kHz, R <sub>L</sub> = 50 Ω,<br>C <sub>L</sub> = 0 pF, V <sub>SW</sub> = 1 V <sub>RMS</sub> |                         | –    | –100 | –    | dB   |     |
| THD+N                      | Total Harmonic Distortion + Noise<br>Performance with A–weighting Filter | R <sub>L</sub> = 600 Ω, f = 20 Hz~20 kHz,<br>V <sub>SW</sub> = 2 V <sub>RMS</sub>                |                         | –    | –110 | –    | dB   |     |
|                            |                                                                          | R <sub>L</sub> = 32 Ω, f = 20 Hz~20 kHz,<br>V <sub>SW</sub> = 1 V <sub>RMS</sub>                 |                         | –    | –110 | –    | dB   |     |
|                            |                                                                          | R <sub>L</sub> = 16 Ω, f = 20 Hz~20 kHz,<br>V <sub>SW</sub> = 0.5 V <sub>RMS</sub>               |                         | –    | –108 | –    | dB   |     |
| USB SWITCH                 |                                                                          |                                                                                                  |                         |      |      |      |      |     |
| t <sub>ON</sub>            | USB Switch Turn–on Time                                                  | DP_R = DN_L = 1.5 V,<br>R <sub>L</sub> = 50 Ω                                                    | V <sub>CC</sub> = 3.3 V | –    | 60   | –    | μs   |     |
| t <sub>OFF</sub>           | USB Switch Turn –off Time                                                | DP_R = DN_L = 1.5 V,<br>R <sub>L</sub> = 50 Ω                                                    |                         | –    | 15   | –    | μs   |     |
| BW                         | –3 dB Bandwidth                                                          | R <sub>L</sub> = 50 Ω                                                                            |                         | –    | 850  | –    | MHz  |     |
|                            | SDD <sub>21</sub> –3 dB Bandwidth                                        |                                                                                                  |                         | –    | 950  | –    |      |     |
| O <sub>IRR</sub>           | Off Isolation between DP, DN and Com-<br>mon Node Pins                   | f = 1 kHz, R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 0 pF,<br>V <sub>SW</sub> = 1 V <sub>RMS</sub> |                         | –    | –100 | –    | dB   |     |
| t <sub>OVP</sub>           | DP_R and DN_L pins OVP Response<br>Time                                  | Vsw = 3.5 V to 5.5 V                                                                             |                         | –    | 1    | 1.5  | μs   |     |
| MIC/AUDIO GROUND SWITCH    |                                                                          |                                                                                                  |                         |      |      |      |      |     |
| t <sub>delay_MIC</sub>     | MIC Switch Turn On Delay Time                                            | SBUx = 1 V, R <sub>L</sub> = 50 Ω                                                                | V <sub>CC</sub> = 3.3 V | –    | 100  | –    | μs   |     |
| t <sub>rise_MIC</sub>      | MIC Switch Turn On Rising Time<br>(Note 1)                               |                                                                                                  |                         | –    | 250  | –    |      |     |
| t <sub>delay_AGND</sub>    | AGND Switch Turn On Time                                                 | SBUx pulled up to 0.5 V by<br>16 Ω, AGND connect to GND                                          | V <sub>CC</sub> = 3.3 V | –    | 100  | –    | μs   |     |
| t <sub>rise_AGND</sub>     | AGND Switch Turn On Rising Time<br>(Note 1)                              |                                                                                                  |                         | –    | 1500 | –    |      |     |
| t <sub>OFF_MIC</sub>       | MIC Switch Turn Off Time                                                 | SBUx = 2.5 V, R <sub>L</sub> = 50 Ω                                                              |                         | –    | 15   | –    |      |     |
| t <sub>OFF_Audio GND</sub> | AGND Switch Turn Off Time                                                | SBUx: Isource = 10 mA,<br>clamp to 2.5 V                                                         |                         | –    | 15   | –    |      |     |
| BW                         | MIC Switch Bandwidth                                                     | R <sub>L</sub> = 50 Ω                                                                            |                         | –    | 50   | –    |      | MHz |

# FSA4480

**Table 5. AC ELECTRICAL CHARACTERISTICS** (continued)

( $V_{CC} = 2.7\text{ V}$  to  $5.5\text{ V}$ ,  $V_{CC}$  (Typ.) =  $3.3\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $85^\circ\text{C}$ , and  $T_A$  (Typ.) =  $25^\circ\text{C}$ , unless otherwise specified.)

| Symbol | Parameter | Condition | Power | Min. | Typ. | Max. | Unit |
|--------|-----------|-----------|-------|------|------|------|------|
|--------|-----------|-----------|-------|------|------|------|------|

## SBUX\_H SWITCH

|           |                             |                                            |                         |   |     |   |               |
|-----------|-----------------------------|--------------------------------------------|-------------------------|---|-----|---|---------------|
| $t_{ON}$  | SBUX_H Switch Turn On Time  | $SBUX = 2.5\text{ V}$ , $R_L = 50\ \Omega$ | $V_{CC} = 3.3\text{ V}$ | – | 35  | – | $\mu\text{s}$ |
| $t_{OFF}$ | SBUX_H Switch Turn Off Time |                                            |                         | – | 15  | – |               |
| BW        | Bandwidth                   | $R_L = 50\ \Omega$                         |                         | – | 50  |   | MHz           |
| $t_{OVP}$ | SBUX Pins OVP Response Time | $V_{SW} = 3.5\text{ V}$ to $5.5\text{ V}$  |                         | – | 0.5 | 1 | $\mu\text{s}$ |

## SENSE SWITCH

|             |                                           |                                           |                         |   |     |     |               |
|-------------|-------------------------------------------|-------------------------------------------|-------------------------|---|-----|-----|---------------|
| $t_{delay}$ | Sense Switch Turn On Delay Time           | $GSBUX = 1\text{ V}$ , $R_L = 50\ \Omega$ | $V_{CC} = 3.3\text{ V}$ | – | 65  | –   | $\mu\text{s}$ |
| $t_{rise}$  | Sense Switch Turn On Rising Time (Note 1) |                                           |                         | – | 260 | –   | $\mu\text{s}$ |
| $t_{OFF}$   | Sense Switch Turn Off Time                |                                           |                         | – | 15  | –   | $\mu\text{s}$ |
| $t_{OVP}$   | GSBUX Pins OVP Response Time              | $V_{SW}: 3.5\text{ V}$ to $5.5\text{ V}$  |                         | – | 0.7 | 1.5 | $\mu\text{s}$ |
| BW          | Bandwidth                                 | $R_L = 50\ \Omega$                        |                         | – | 150 | –   | MHz           |

## DET DELAY

|                  |                    |                            |                         |   |   |   |               |
|------------------|--------------------|----------------------------|-------------------------|---|---|---|---------------|
| $t_{DELAY\_DET}$ | DET Response Delay | Transition from 0 to 1.8 V | $V_{CC} = 3.3\text{ V}$ | – | 1 | – | $\mu\text{s}$ |
|                  |                    | Transition from 1.8 to 0 V |                         | – | 5 | – |               |

1. Turn on timing can be controlled by I<sup>2</sup>C register.


**Table 6. I<sup>2</sup>C SPECIFICATION**

( $V_{CC} = 2.7\text{ V to }5.5$ ,  $V_{CC}(\text{Typ.}) = 3.3\text{ V}$ ,  $T_A = -40^\circ\text{C to }85^\circ\text{C}$ .  $T_A(\text{Typ.}) = 25^\circ\text{C}$ , unless otherwise specified)

| Symbol        | Parameter                                                                   | Fast Mode     |      |               |
|---------------|-----------------------------------------------------------------------------|---------------|------|---------------|
|               |                                                                             | Min.          | Max. | Unit          |
| $f_{SCL}$     | I <sup>2</sup> C_SCL Clock Frequency                                        |               | 400  | kHz           |
| $t_{HD; STA}$ | Hold Time (Repeated) START Condition                                        | 0.6           |      | $\mu\text{s}$ |
| $t_{LOW}$     | Low Period of I <sup>2</sup> C_SCL Clock                                    | 1.3           |      | $\mu\text{s}$ |
| $t_{HIGH}$    | High Period of I <sup>2</sup> C_SCL Clock                                   | 0.6           |      | $\mu\text{s}$ |
| $t_{SU; STA}$ | Set-up Time for Repeated START Condition                                    | 0.6           |      | $\mu\text{s}$ |
| $t_{HD; DAT}$ | Data Hold Time (Note 2)                                                     | 0             | 0.9  | $\mu\text{s}$ |
| $t_{SU; DAT}$ | Data Set-up Time (Note 3)                                                   | 100           |      | ns            |
| $t_r$         | Rise Time of I <sup>2</sup> C_SDA and I <sup>2</sup> C_SCL Signals (Note 3) | $20 + 0.1C_b$ | 300  | ns            |
| $t_f$         | Fall Time of I <sup>2</sup> C_SDA and I <sup>2</sup> C_SCL Signals (Note 3) | $20 + 0.1C_b$ | 300  | ns            |
| $t_{SU; STO}$ | Set-up Time for STOP Condition                                              | 0.6           |      | $\mu\text{s}$ |
| $t_{BUF}$     | Bus-Free Time between STOP and START Conditions                             | 1.3           |      | $\mu\text{s}$ |
| $t_{SP}$      | Pulse Width of Spikes that Must Be Suppressed by the Input Filter           | 0             | 50   | ns            |

2. Guaranteed by design, not production tested.

3. A fast-mode I<sup>2</sup>C-bus device can be used in a standard-mode I<sup>2</sup>C-bus system, but the requirement  $t_{SU; DAT} \geq \pm 250\text{ ns}$  must be met. This is automatically the case if the device does not stretch the LOW period of the I<sup>2</sup>C\_SCL signal. If such a device does stretch the LOW period of the I<sup>2</sup>C\_SCL signal, it must output the next data bit to the I<sup>2</sup>C\_SDA line  $t_{r\_max} + t_{SU; DAT} = 1000 + 250 = 1250\text{ ns}$  (according to the standard-mode I<sup>2</sup>C bus specification) before the I<sup>2</sup>C\_SCL line is released.

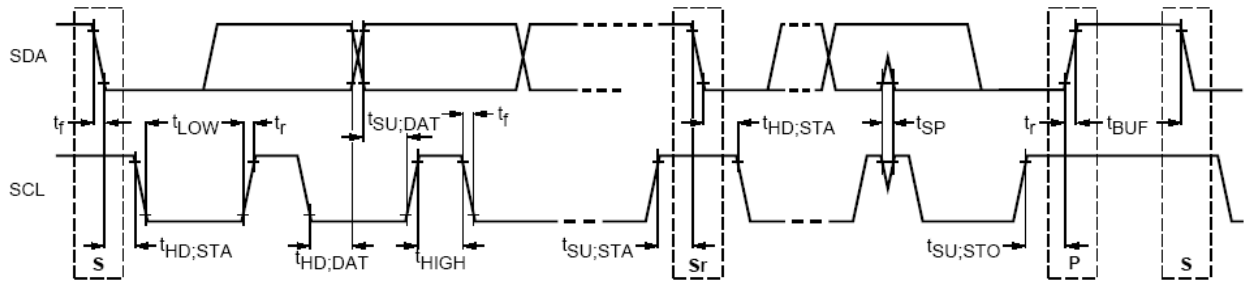**Figure 3. Definition of Timing for Full-Speed Mode Devices on the I<sup>2</sup>C Bus**

**Table 7. CAPACITANCE**(V<sub>CC</sub> = 2.7 V to 5.5 V, V<sub>CC</sub> (Typ.) = 3.3 V, T<sub>A</sub> = -40°C to 85°C, and T<sub>A</sub> (Typ.) = 25°C)

| Symbol                     | Parameter                                            | Condition                                           | Power       | T <sub>A</sub> = -40°C to +85°C |      |      | Unit |
|----------------------------|------------------------------------------------------|-----------------------------------------------------|-------------|---------------------------------|------|------|------|
|                            |                                                      |                                                     |             | Min.                            | Typ. | Max. |      |
| C <sub>CON_USB/Audio</sub> | On Capacitance <sup>(6)</sup><br>(Common Port)       | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias | VCC = 3.3 V |                                 | 9    |      | pF   |
| C <sub>OFF_USB/Audio</sub> | Off Capacitance <sup>(6)</sup><br>(Common Port)      | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias |             |                                 | 7.5  |      | pF   |
| C <sub>OFF_USB</sub>       | Off Capacitance<br>(Non-Common Ports) <sup>(6)</sup> | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias |             |                                 | 3    |      | pF   |
| C <sub>CON_SENSE_SW</sub>  | On Capacitance –<br>(Common Ports) <sup>(6)</sup>    | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias |             |                                 | 55   |      | pF   |
| C <sub>OFF_SENSE_SW</sub>  | Off Capacitance –<br>(Common Ports) <sup>(6)</sup>   | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias |             |                                 | 88   |      | pF   |
| C <sub>CON_MIC_SW</sub>    | On Capacitance –<br>(Common Ports) <sup>(6)</sup>    | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias |             |                                 | 170  |      | pF   |
| C <sub>OFF_MIC_SW</sub>    | Off Capacitance –<br>(Common Ports) <sup>(6)</sup>   | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias |             |                                 | 10   |      | pF   |
| C <sub>CON_AGND_SW</sub>   | On Capacitance <sup>(6)</sup><br>(Common Port)       | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias |             |                                 | 125  |      | pF   |
| C <sub>CON_SBUx_H_SW</sub> | On Capacitance <sup>(6)</sup><br>(Common Port)       | f = 1 MHz, 100 mV <sub>PK-PK</sub> , 100 mV DC bias |             |                                 | 160  |      | pF   |
| C <sub>CNTRL</sub>         | Control Input Pin Capacitance <sup>(6)</sup>         | f = 1 MHz,<br>100 mV <sub>PP</sub> , 100 mV DC bias | ENN         |                                 | 3    |      | pF   |

**Table 8. REGISTER MAPS**

| ADDR | Register Name                              | Type | Reset Value | BIT7                                                 | BIT6               | BIT5                | BIT4            | BIT3               | BIT2               | BIT1               | BIT0                 |
|------|--------------------------------------------|------|-------------|------------------------------------------------------|--------------------|---------------------|-----------------|--------------------|--------------------|--------------------|----------------------|
| 00H  | Device ID                                  | R    | 0x09        | 0                                                    | 0                  | 0                   | 0               | 1                  | 0                  | 0                  | 1                    |
| 01H  | OVP Interrupt Mask                         | R/W  | 0x00        | Reserved                                             | Mask OVP interrupt | Mask OVP /DP_R      | Mask OVP /DN_L  | Mask OVP /SBU1     | Mask OVP /SBU2     | Mask OVP /GSBU1    | Mask OVP /GSBU2      |
| 02H  | OVP interrupt flag                         | R/C  | 0x00        | Reserved                                             |                    | DP_R                | DN_L            | SBU1               | SBU2               | GSBU               | GSBU2                |
| 03H  | OVP status                                 | R    | 0x00        | Reserved                                             |                    | OVP/DP_R            | OVP/DN_L        | OVP/SBU1           | OVP/SBU2           | OVP/GSBU1          | OVP/GSBU2            |
| 04H  | Switch settings Enable                     | R/W  | 0x98        | Device control                                       | SBU1_H to SBUx     | SBU2_H to SBUx      | DN_L to DN or L | DP_R to DP or R    | Sense to GSBUx     | MIC to SBUx        | Audio Ground to SBUx |
| 05H  | Switch select                              | R/W  | 0x18        | Reserved                                             | SBU1_H to SBUx     | SBU2_H to SBUx      | DN_L to DN or L | DP_R to DP or R    | Sense to GSBUx     | MIC to SBUx        | Audio Ground to SBUx |
| 06H  | Switch Status0                             | R    | 0x00        | Reserved                                             |                    | Sense Switch Status |                 | DP_R Switch Status |                    | DN_L Switch Status |                      |
| 07H  | Switch Status1                             | R    | 0x00        | Reserved                                             |                    | SBU2 Switch Status  |                 |                    | SBU1 Switch Status |                    |                      |
| 08H  | Audio Switch Left Channel turn on Control  | R/W  | 0x01        | Audio switch left channel slow control [7:0]         |                    |                     |                 |                    |                    |                    |                      |
| 09H  | Audio Switch Right Channel turn on Control | R/W  | 0x01        | Audio switch right channel slow control [7:0]        |                    |                     |                 |                    |                    |                    |                      |
| 0AH  | MIC switch turn on control                 | R/W  | 0x01        | MIC switch right channel slow control [7:0]          |                    |                     |                 |                    |                    |                    |                      |
| 0BH  | Sense switch turn on control               | R/W  | 0x01        | Sense switch right channel slow control [7:0]        |                    |                     |                 |                    |                    |                    |                      |
| 0CH  | Audio Ground Switch turn on Control        | R/W  | 0x01        | Audio ground switch right channel slow control [7:0] |                    |                     |                 |                    |                    |                    |                      |

Table 8. REGISTER MAPS

| ADDR | Register Name                                                       | Type | Reset Value | BIT7                                                                              | BIT6            | BIT5                        | BIT4         | BIT3                         | BIT2                       | BIT1                        | BIT0                              |
|------|---------------------------------------------------------------------|------|-------------|-----------------------------------------------------------------------------------|-----------------|-----------------------------|--------------|------------------------------|----------------------------|-----------------------------|-----------------------------------|
| 0DH  | Timing Delay between R switch enable and L switch enable            | R/W  | 0x00        | Timing Delay between R switch enable and L switch enable control [7:0]            |                 |                             |              |                              |                            |                             |                                   |
| 0EH  | Timing Delay between MIC switch enable and L switch enable          | R/W  | 0x00        | Timing Delay between MIC switch enable and L switch enable control [7:0]          |                 |                             |              |                              |                            |                             |                                   |
| 0FH  | Timing Delay between Sense switch enable and L switch enable        | R/W  | 0x00        | Timing Delay between Sense switch enable and L switch enable control [7:0]        |                 |                             |              |                              |                            |                             |                                   |
| 10H  | Timing Delay between Audio ground switch enable and L switch enable | R/W  | 0x00        | Timing Delay between Audio ground switch enable and L switch enable control [7:0] |                 |                             |              |                              |                            |                             |                                   |
| 11H  | Audio accessory status                                              | R    | 0x02        | Reserved                                                                          |                 |                             |              |                              |                            | CC_IN                       | DET                               |
| 12H  | Function enable                                                     | R/W  | 0x08        | Reserved                                                                          | DET I/O Control | RES detection range setting | GIPO control | SLOW TURN-ON CONTR OLL       | MIC auto control           | RES detection : auto clear  | Audio jack detection : auto clear |
| 13H  | RES detection pin setting                                           | R/W  | 0x00        | Reserved                                                                          |                 |                             |              |                              | Detection pin select [2:0] |                             |                                   |
| 14H  | RES detection value                                                 | R    | 0xFF        | R detection value [7:0]                                                           |                 |                             |              |                              |                            |                             |                                   |
| 15H  | RES detection interrupt threshold                                   | R/W  | 0x16        | R detection Interrupt resistance threshold [7:0]                                  |                 |                             |              |                              |                            |                             |                                   |
| 16H  | RES detection interval                                              | R/W  | 0X00        | Reserved                                                                          |                 |                             |              |                              |                            | Detection interval [1:0]    |                                   |
| 17H  | Audio jack Status                                                   | RO   | 0x01        | Reserved                                                                          |                 |                             |              | 4pole,SB U2 MIC              | 4pole,SB U1 MIC            | 3pole                       | No audio                          |
| 18H  | Detection interrupt                                                 | R/C  | 0x00        | Reserved                                                                          |                 |                             |              |                              | Audio detection done       | RES detection occurred      | RES detection done                |
| 19H  | Detection interrupt Mask                                            | R/W  | 0x00        | Reserved                                                                          |                 |                             |              |                              | Audio detection done mask  | RES detection occurred mask | RES detection done mask           |
| 1AH  | Audio detection RGE1                                                | RO   | 0xFF        | audio detection value REG1 [7:0]                                                  |                 |                             |              |                              |                            |                             |                                   |
| 1BH  | Audio detection RGE2                                                | RO   | 0xFF        | audio detection value REG2 [7:0]                                                  |                 |                             |              |                              |                            |                             |                                   |
| 1CH  | MIC Threshold DATA0                                                 | R/W  | 0x20        | MIC Threshold value DATA0 [7:0]                                                   |                 |                             |              |                              |                            |                             |                                   |
| 1DH  | MIC Threshold DATA1                                                 | R/W  | 0xFF        | MIC Threshold value DATA1 [7:0]                                                   |                 |                             |              |                              |                            |                             |                                   |
| 1EH  | I2C Reset                                                           | W/C  | 0x00        | Reserved                                                                          |                 |                             |              |                              |                            |                             | I2C reset                         |
| 1FH  | Current Source Setting                                              | R/W  | 0x07        | Reserved                                                                          |                 |                             |              | Current Source setting [3:0] |                            |                             |                                   |

Table 9. I<sup>2</sup>C SLAVE ADDRESS

| ADDR     | Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|
| ADDR = L | 1     | 0     | 0     | 0     | 0     | 1     | 0     | R/W   |
| ADDR = H | 1     | 0     | 0     | 0     | 0     | 1     | 1     | R/W   |

## FSA4480

### DEVICE ID

Address: 00h

Reset Value: 8'b 0000\_1001

Type: Read

| Bits | Name        | Size | Description         |
|------|-------------|------|---------------------|
| 7:6  | Vendor ID   | 2    | Vendor ID           |
| 5:3  | Version ID  | 3    | Device Version ID   |
| 2:0  | Revision ID | 3    | Revision History ID |

### OVP INTERRUPT MASK

Address: 01h

Reset Value: 8'b 0000\_0000

Type: Read/Write

| Bits | Name                             | Size | Description                                                                                                          |
|------|----------------------------------|------|----------------------------------------------------------------------------------------------------------------------|
| 7    | Reserved                         | 1    | Do Not Use                                                                                                           |
| 6    | OVP Interrupt mask control       | 1    | OVP Interrupt function Enable/Disable<br>0: Controlled by [5:0] bit<br>1: Mask all connector side pins OVP interrupt |
| 5    | DP_R OVP Interrupt mask control  | 1    | 0: Do not mask OVP interrupt<br>1: Mask OVP interrupt                                                                |
| 4    | DN_L OVP Interrupt mask control  | 1    | 0: Do not mask OVP interrupt<br>1: Mask OVP interrupt                                                                |
| 3    | SBU1 OVP Interrupt mask control  | 1    | 0: Do not mask OVP interrupt<br>1: Mask OVP interrupt                                                                |
| 2    | SBU2 OVP Interrupt mask control  | 1    | 0: Do not mask OVP interrupt<br>1: Mask OVP interrupt                                                                |
| 1    | GSRU1 OVP Interrupt mask control | 1    | 0: Do not mask OVP interrupt<br>1: Mask OVP interrupt                                                                |
| 0    | GSRU2 OVP Interrupt mask control | 1    | 0: Do not mask OVP interrupt<br>1: Mask OVP interrupt                                                                |

### OVP INTERRUPT FLAG

Address: 02h

Reset Value: 8'b 0000\_0000

Type: Read Clear

| Bits  | Name      | Size | Description                                                |
|-------|-----------|------|------------------------------------------------------------|
| [7:6] | Reserved  | 2    | Do Not Use                                                 |
| 5     | DP_R OVP  | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 4     | DN_L OVP  | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 3     | SBU1 OVP  | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 2     | SBU2 OVP  | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 1     | GSRU1 OVP | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 0     | GSRU2 OVP | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |

## FSA4480

### OVP STATUS

Address: 03h

Reset Value: 8'b 0000\_0000

Type: Read

| Bits  | Name              | Size | Description                                                |
|-------|-------------------|------|------------------------------------------------------------|
| [7:6] | Reserved          | 2    | Do Not Use                                                 |
| 5     | OVP on DP_R PIN   | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 4     | OVP on DN_L PIN   | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 3     | OVP on SBU1 PIN   | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 2     | OVP on SBU2 PIN   | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 1     | OVP on GSBUS1 PIN | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |
| 0     | OVP on GSBUS2 PIN | 1    | 0: OVP event has not occurred<br>1: OVP event has occurred |

### SWITCHING SETTING ENABLE

Address: 04h

Reset Value: 8'b 1001\_1000

Type: Read/Write

| Bits | Name                     | Size | Description                                                                                                                                                                                                                                      |
|------|--------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7    | Device Enable            | 1    | 0: Device Disable; L, R pull down by 10 k and other switch nodes will be high-Z for positive input.<br>1: Device Enable.<br>Device Enable = 1 Device enable = 0<br>ENN = 1 Device Disable Device Disable<br>ENN = 0 Device Enable Device Disable |
| 6    | SBU1_H to SBUx switches  | 1    | 0: Switch Disable; SBU1_H will be high-Z for positive input<br>1: Switch Enable                                                                                                                                                                  |
| 5    | SBU2_H to SBUx switches  | 1    | 0: Switch Disable; SBU2_H will be high-Z for positive input<br>1: Switch Enable                                                                                                                                                                  |
| 4    | DN_L to DN or L switches | 1    | 0: Switch Disable; DN_L,DN will be high-Z for positive input. L pull down by 10 kohm<br>1: Switch Enable                                                                                                                                         |
| 3    | DP_R to DP or R switches | 1    | 0: Switch Disable; DP_R,DP will be high-Z for positive input. R pull down by 10 kohm<br>1: Switch Enable                                                                                                                                         |
| 2    | Sense to GSBUSx switches | 1    | 0: Switch Disable; Sense,GSBUS1 and GSBUS2 will be high-Z for positive input<br>1: Switch Enable                                                                                                                                                 |
| 1    | MIC to SBUx switches     | 1    | 0: Switch Disable: MIC will be high-Z for positive input.<br>1: Switch Enable                                                                                                                                                                    |
| 0    | AGND to SBUx switches    | 1    | 0: Switch Disable: AGND will be high-Z for positive input.<br>1: Switch Enable                                                                                                                                                                   |

## FSA4480

### SWITCH SELECT

Address: 05h

Reset Value: 8'b 0001\_1000

Type: Read/Write

| Bits | Name                     | Size | Description                                                |
|------|--------------------------|------|------------------------------------------------------------|
| 7    | Reserved                 | 1    | Do Not Use                                                 |
| 6    | SBU1_H switches          | 1    | 0: SBU1_H to SBU1 switch ON<br>1: SBU1_H to SBU2 switch ON |
| 5    | SBU2_H switches          | 1    | 0: SBU2_H to SBU2 switch ON<br>1: SBU2_H to SBU1 switch ON |
| 4    | DN_L to DN or L switches | 1    | 0: DN_L to L switch ON<br>1: DN_L to DN switch ON          |
| 3    | DP_R to DP or R switches | 1    | 0: DP_R to R switch ON<br>1: DP_R to DP switch ON          |
| 2    | Sense to GSBUX switches  | 1    | 0: Sense to GSBU1 switch ON<br>1: Sense to GSBU2 switch ON |
| 1    | MIC to SBUx switches     | 1    | 0: MIC to SBU2 switch ON<br>1: MIC to SBU1 switch ON       |
| 0    | AGND to SBUx switches    | 1    | 0: AGND to SBU1 switch ON<br>1: AGND to SBU2 switch ON     |

### SWITCH STATUS0

Address: 06h

Reset Value: 8'b 0000\_0000

Type: Read Only

| Bits  | Name                | Size | Description                                                                                                             |
|-------|---------------------|------|-------------------------------------------------------------------------------------------------------------------------|
| [7:6] | Reserved            | 2    | Do not use                                                                                                              |
| [5:2] | Sense Switch Status | 2    | 00: Sense switch is Open/Not Connected<br>01: Sense connected to GSBU1<br>10: Sense connected to GSBU2<br>11: Not Valid |
| [3:2] | DP_RSwitch Status   | 2    | 00: DP_R Switch Open/Not Connected<br>01: DP_Rconnected to DP<br>10: DP_Rconnected to R<br>11: Not Valid                |
| [1:0] | DN_L switch Status  | 2    | 00: DN_L Switch Open/Not Connected<br>01: DN_L connected to DN<br>10: DN_L connected to L<br>11: Not Valid              |

# FSA4480

## SWITCH STATUS1

Address: 07h

Reset Value: 8'b 0000\_0000

Type: Read Only

| Bits  | Name               | Size | Description                                                                                                                                                                                                                                  |
|-------|--------------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:6] | Reserved           | 2    | Do not use                                                                                                                                                                                                                                   |
| [5:3] | SBU2 Switch Status | 3    | 000: SBU2 switch is Open/Not Connected<br>001: SBU2 connected to MIC<br>010: SBU2 connected to AGND<br>011: SBU2 connected to SBU1_H<br>100: SBU2 connected to SBU2_H<br>101: SBU2 connected both SBU1_H and SBU2_H<br>110...111: Do not use |
| [2:0] | SBU1 Switch Status | 3    | 000: SBU1 switch is Open/Not Connected<br>001: SBU1 connected to MIC<br>010: SBU1 connected to AGND<br>011: SBU1 connected to SBU1_H<br>100: SBU1 connected to SBU2_H<br>101: SBU1 connected both SBU1_H and SBU2_H<br>110...111: Do not use |

## AUDIO SWITCH LEFT CHANNEL SLOW TURN-ON

Address: 08h

Reset Value: 8'b 0000\_0001

Type: Read/Write

| Bits  | Name                               | Size | Description             |
|-------|------------------------------------|------|-------------------------|
| [7:0] | Switch turn on rising time setting | 8    | 11111111: 25600 $\mu$ S |
|       |                                    |      | ...                     |
|       |                                    |      | 00000001: 200 $\mu$ S   |
|       |                                    |      | 00000000: 100 $\mu$ S   |

## AUDIO SWITCH RIGHT CHANNEL SLOW TURN-ON

Address: 09h

Reset Value: 8'b 0000\_0001

Type: Read/Write

| Bits  | Name                               | Size | Description             |
|-------|------------------------------------|------|-------------------------|
| [7:0] | Switch turn on rising time setting | 8    | 11111111: 25600 $\mu$ S |
|       |                                    |      | ...                     |
|       |                                    |      | 00000001: 200 $\mu$ S   |
|       |                                    |      | 00000000: 100 $\mu$ S   |

## MIC SWITCH SLOW TURN-ON

Address: 0Ah

Reset Value: 8'b 0000\_0001

Type: Read/Write

| Bits  | Name                               | Size | Description             |
|-------|------------------------------------|------|-------------------------|
| [7:0] | Switch turn on rising time setting | 8    | 11111111: 25700 $\mu$ S |
|       |                                    |      | ...                     |
|       |                                    |      | 00000010: 350 $\mu$ S   |
|       |                                    |      | 00000001: 250 $\mu$ S   |
|       |                                    |      | 00000000: Not Valid     |

## FSA4480

### SENSE SWITCH SLOW TURN-ON

Address: 0Bh

Reset Value: 8'b 0000\_0001

Type: Read/Write

| Bits  | Name                               | Size | Description             |
|-------|------------------------------------|------|-------------------------|
| [7:0] | Switch turn on rising time setting | 8    | 11111111: 25600 $\mu$ S |
|       |                                    |      | ...                     |
|       |                                    |      | 00000001: 200 $\mu$ S   |
|       |                                    |      | 00000000: 100 $\mu$ S   |

### AUDIO GROUND SWITCH SLOW TURN-ON

Address: 0Ch

Reset Value: 8'b 0000\_0001

Type: Read/Write

| Bits  | Name                               | Size | Description              |
|-------|------------------------------------|------|--------------------------|
| [7:0] | Switch turn on rising time setting | 8    | 11111111: 179000 $\mu$ S |
|       |                                    |      | ...                      |
|       |                                    |      | 00000001: 1400 $\mu$ S   |
|       |                                    |      | 00000000: 700 $\mu$ S    |

### TIMING DELAY BETWEEN R SWITCH ENABLE AND L SWITCH ENABLE

Address: 0Dh

Reset Value: 8'b 0000\_0000

Type: Read/Write

| Bits  | Name                 | Size | Description             |
|-------|----------------------|------|-------------------------|
| [7:0] | Delay timing setting | 8    | 11111111: 25500 $\mu$ S |
|       |                      |      | 11111110: 25400 $\mu$ S |
|       |                      |      | ...                     |
|       |                      |      | 00000001: 100 $\mu$ S   |
|       |                      |      | 00000000: 0 $\mu$ S     |

### TIMING DELAY BETWEEN MIC SWITCH ENABLE AND L SWITCH ENABLE

Address: 0Eh

Reset Value: 8'b 0000\_0000

Type: Read/Write

| Bits  | Name                 | Size | Description             |
|-------|----------------------|------|-------------------------|
| [7:0] | Delay timing setting | 8    | 11111111: 25500 $\mu$ S |
|       |                      |      | 11111110: 25400 $\mu$ S |
|       |                      |      | ...                     |
|       |                      |      | 00000001: 100 $\mu$ S   |
|       |                      |      | 00000000: 0 $\mu$ S     |

## FSA4480

### TIMING DELAY BETWEEN SENSE SWITCH ENABLE AND L SWITCH ENABLE

Address: 0Fh

Reset Value: 8'b 0000\_0000

Type: Read/Write

| Bits  | Name                 | Size | Description             |
|-------|----------------------|------|-------------------------|
| [7:0] | Delay timing setting | 8    | 11111111: 25500 $\mu$ S |
|       |                      |      | 11111110: 25400 $\mu$ S |
|       |                      |      | ...                     |
|       |                      |      | 00000001: 100 $\mu$ S   |
|       |                      |      | 00000000: 0 $\mu$ S     |

### TIMING DELAY BETWEEN AUDIO GROUND SWITCH ENABLE AND L SWITCH ENABLE

Address: 10h

Reset Value: 8'b 0000\_0000

Type: Read/Write

| Bits  | Name                 | Size | Description             |
|-------|----------------------|------|-------------------------|
| [7:0] | Delay timing setting | 8    | 11111111: 25500 $\mu$ S |
|       |                      |      | 11111110: 25400 $\mu$ S |
|       |                      |      | ...                     |
|       |                      |      | 00000001: 100 $\mu$ S   |
|       |                      |      | 00000000: 0 $\mu$ S     |

### AUDIO ACCESSORY STATUS

Address: 11h

Reset Value: 8'b 0000\_0010

Type: Read

| Bits  | Name     | Size | Description                                   |
|-------|----------|------|-----------------------------------------------|
| [7:2] | Reserved | 6    | Do not use                                    |
| 1     | CC_IN    | 1    | 0: CC_IN < 1.2 V<br>1: CC_IN > 1.5 V          |
| 0     | DET      | 1    | 0: DET output is low<br>1: DET output is high |

**FUNCTION ENABLE**

Address: 12h

Reset Value: 8'b 0000\_1000

Type: Read/Write

| Bits | Name                                          | Size | Description                                                                                  |
|------|-----------------------------------------------|------|----------------------------------------------------------------------------------------------|
| 7    | Reserved                                      | 1    | Do not use                                                                                   |
| 6    | DET I/O Control                               | 1    | 1: DET pin is in Open/Drain Configuration<br>0: DET pin is in Push/Pull Configuration        |
| 5    | RES detection range setting                   | 1    | 1: 10k to 2560 k<br>0: 1k to 256 k                                                           |
| 4    | GPIO control enable                           | 1    | 1: enable<br>0: disable                                                                      |
| 3    | Slow turn on control enable                   | 1    | 1: enable<br>0: disable                                                                      |
| 2    | MIC auto break out control enable             | 1    | 1: enable<br>0: disable                                                                      |
| 1    | RES detection enable                          | 1    | 1: enable; will be changed to '0' after low resistance detection<br>0: disable               |
| 0    | Audio jack detection and configuration enable | 1    | 1: enable; will be changed to '0' after audio jack detection and configuration<br>0: disable |

When GPIO control mode (manual switch control) is enable, 'Switch control' register is changed to read only. It will reflect switch status. I<sup>2</sup>C slave address is

**RES DETECTION PIN SETTING**

Address: 13h

Reset Value: 8'b 0000\_0000

Type: Read

| Bits  | Name          | Size | Description                                                                                                 |
|-------|---------------|------|-------------------------------------------------------------------------------------------------------------|
| [7:3] | Reserved      | 5    | Do not use                                                                                                  |
| [2:0] | Pin selection | 3    | 000: CC_IN<br>001: DP/R<br>010: DN_L<br>011: SBU1<br>100: SBU2<br>101: Do not use<br>...<br>111: Do not use |

If RES detection pin is enable before setting PIN selection it will always do the CC\_IN first. Recommend user to select the pin first before setting the RES detection pin enable.

**RES VALUE**

Address: 14h

Reset Value: 8'b 1111\_1111

Type: Read

| Bits  | Name                      | Size | Description                                        |
|-------|---------------------------|------|----------------------------------------------------|
| [7:0] | Detected resistance value | 8    | 0000_0000 : R < 1 k<br>...<br>1111_1111: R > 300 K |

## FSA4480

### RES DETECTION THRESHOLD

Address: 15h

Reset Value: 8'b 0001\_0110

Type: Read

| Bits  | Name                    | Size | Description                                                                                                                                                                                                                                      |
|-------|-------------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [7:0] | RES detection threshold | 8    | Selection by 1 K $\Omega$ per step if Reg 12h [5] = 0<br>Selection by 10 K $\Omega$ per step if Reg 12h [5] = 0<br>Default Value = 22 K $\Omega$<br>0000_0000: 1 K $\Omega$ /10 K $\Omega$<br>...<br>1111_1111: 256 K $\Omega$ / 2560 K $\Omega$ |

### RES DETECTION INTERVAL

Address: 16h

Reset Value: 8'b 0000\_0000

Type: Read

| Bits  | Name                   | Size | Description                                     |
|-------|------------------------|------|-------------------------------------------------|
| [7:2] | Reserved               | 6    | Do not use                                      |
| [1:0] | RES detection interval | 2    | 00: Single<br>01: 100 mS<br>10: 1 S<br>11: 10 S |

### AUDIO JACK STATUS

Address: 17h

Reset Value: 8'b 0000\_0001

Type: Read

| Bits  | Name               | Size | Description                                              |
|-------|--------------------|------|----------------------------------------------------------|
| [7:3] | Reserved           | 4    | Do not use                                               |
| 3     | 4pole              | 1    | 1: 4 Pole SBU2 to MIC, SBU1 to audio ground<br>0: others |
| 2     | 4pole              | 1    | 1: 4 Pole SBU1 to MIC, SBU2 to audio ground<br>0: others |
| 1     | 3 pole             | 1    | 1: 3 pole<br>0: others                                   |
| 0     | No audio accessory | 1    | 1: No audio accessory<br>0: Audio accessory attached     |

### RES DETECTION /AUDIO JACK DETECTION INTERRUPT FLAG

Address: 18h

Reset Value: 8'b 0000\_0000

Type: Read Clear

| Bits  | Name                                   | Size | Description                                                                                                          |
|-------|----------------------------------------|------|----------------------------------------------------------------------------------------------------------------------|
| [7:3] | Reserved                               | 5    | Do Not Use                                                                                                           |
| 2     | Audio jack detection and configuration | 1    | 0: Audio jack detection and configuration has not occurred<br>1: Audio jack detection and configuration has occurred |
| 1     | Low resistance occurred                | 1    | 0: Low resistance has not occurred<br>1: Low resistance has occurred                                                 |
| 0     | Low resistance detection               | 1    | 0: Low resistance has not occurred<br>1: Low resistance has occurred                                                 |

**RES /AUDIO JACK DETECTION INTERRUPT MASK**

Address: 19h

Reset Value: 8'b 0000\_0000

Type: Read Clear

| Bits  | Name                                   | Size | Description                                                           |
|-------|----------------------------------------|------|-----------------------------------------------------------------------|
| [7:3] | Reserved                               | 5    | Do Not Use                                                            |
| 2     | Audio jack detection and configuration | 1    | 1: Mask Audio jack detection and configuration has occurred interrupt |
| 1     | Low resistance occurred                | 1    | 1: Low resistance has occurred interrupt                              |
| 0     | Low resistance detection               | 1    | 1: Low resistance detection has occurred interrupt                    |

**AUDIO JACK DETECTION REG1 VALUE**

Address: 1Ah

Reset Value: 8'b 1111\_1111

Type: Read

| Bits  | Name                       | Size | Description                     |
|-------|----------------------------|------|---------------------------------|
| [7:0] | Audio jack detection value | 8    | Resistance between SBU1 to SBU2 |

**AUDIO JACK DETECTION REG2 VALUE**

Address: 1Bh

Reset Value: 8'b 1111\_1111

Type: Read

| Bits  | Name                       | Size | Description                     |
|-------|----------------------------|------|---------------------------------|
| [7:0] | Audio jack detection value | 8    | Resistance between SBU2 to SBU1 |

**MIC DETECTION THRESHOLD DATA0**

Address: 1Ch

Reset Value: 8'b 0010\_0000

Type: Read/Write

| Bits  | Name                          | Size | Description                                        |
|-------|-------------------------------|------|----------------------------------------------------|
| [7:0] | MIC detection threshold DATA0 | 8    | MIC detection threshold DATA0<br>0010_0000: 300 mV |

**MIC DETECTION THRESHOLD DATA1**

Address: 1Dh

Reset Value: 8'b 1111\_1111

Type: Read/Write

| Bits  | Name                          | Size | Description                                       |
|-------|-------------------------------|------|---------------------------------------------------|
| [7:0] | MIC detection threshold DATA1 | 8    | MIC detection threshold DATA1<br>1111_1111: 2.4 V |

**I2C RESET**

Address: 1Eh

Reset Value: 8'b 0000\_0000

Type: W/C

| Bits  | Name      | Size | Description                |
|-------|-----------|------|----------------------------|
| [7:1] | Reserved  | 7    | Reserved                   |
| 0     | I2C reset | 1    | 0: default<br>1: I2C reset |

## FSA4480

### CURRENT SOURCE SETTING

Address: 1Fh

Reset Value: 8'b 0000\_0111

Type: Write

| Bits  | Name                   | Size | Description                                                                   |
|-------|------------------------|------|-------------------------------------------------------------------------------|
| [7:4] | Reserved               | 4    | Reserved                                                                      |
| [3:0] | Current Source Setting | 4    | 1111: 1500 $\mu$ A<br>0111: 700 $\mu$ A<br>0001: 100 $\mu$ A<br>0000: invalid |

## APPLICATION INFORMATION

### Over-Voltage Protection

FSA4480 features over-voltage protection (OVP) on receptacle side pins that switches off the internal signal routing path if the input voltage exceeds the OVP threshold.

If OVP is occurred, interrupt signal can be send by INT signal and FLAG data will provide information that which pin had OVP event.

|                                     | Device Disable | Device Enable |
|-------------------------------------|----------------|---------------|
| $CC\_IN < V_{TH\_L} = 1.2\text{ V}$ | DET = 0        | DET = 1       |
| $CC\_IN > V_{TH\_H} = 1.5\text{ V}$ | DET = 0        | DET = 0       |

### MIC Switch Auto-off Function

The function is active during control bit 0x12h bit[2] = 1. When CC\_IN is high ( $CC\_IN > 1.5\text{ V}$ ) and L,R, Audio ground switches are under on status, MIC switch will be off and receptacle side pin will be connected to ground for 50  $\mu\text{S}$  first. Then it shows high-Z status under MIC switch is set on status.

### Headset Detection

FSA4480 integrates headset unplug detection function by detecting the CC\_IN voltage. The function is always active when device is enabling. DET will be high when CC\_IN is low ( $CC\_IN < 1.2\text{ V}$ ). When CC\_IN = High ( $CC\_IN > 1.5\text{ V}$ ), DET will be released to low.

### Audio Ground Detection and Configuration

The function is active when control bit 0x12h bit[0] = 1 and R, L AGND switches are set to be on status. For type-C interface analog headset, the audio ground could be SBU1 pin or SBU2 pin. The function will provide autonomous detection and configuration to route MIC and audio ground signal accordingly.

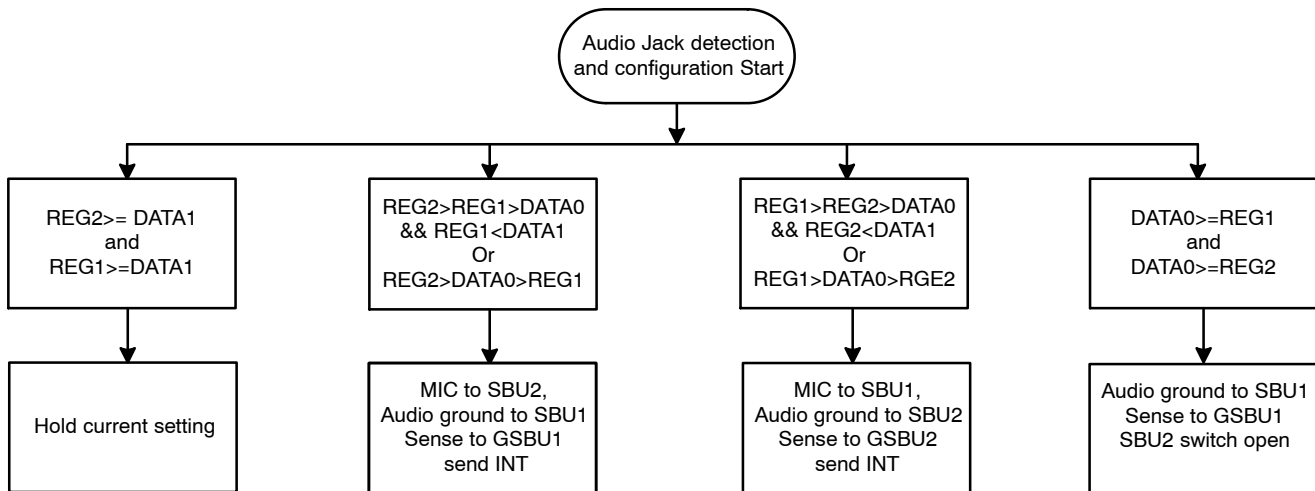


Figure 4.

During detection and configuration, the R, L, Sense, MIC and Audio ground switch will be off. After detection and configuration, R and L switches will turn on according to

switch configuration and timing setting. MIC, Sense and Audio ground will turn on according to detection results and timing control setting.

### Resistance Detection

The function is active during control bit 0x12h bit[1] = 1. It will monitor the resistance between receptacle side pins and ground. During resistance detection, the switch which is monitored will be off. The detection result will be saved

in the resistance flag register. The measurement could be from 1 kΩ to 2.56 MΩ which is controlled by internal register. The detection interval can be set at 100 ms, 1 s or 10 s by register 0x16h.

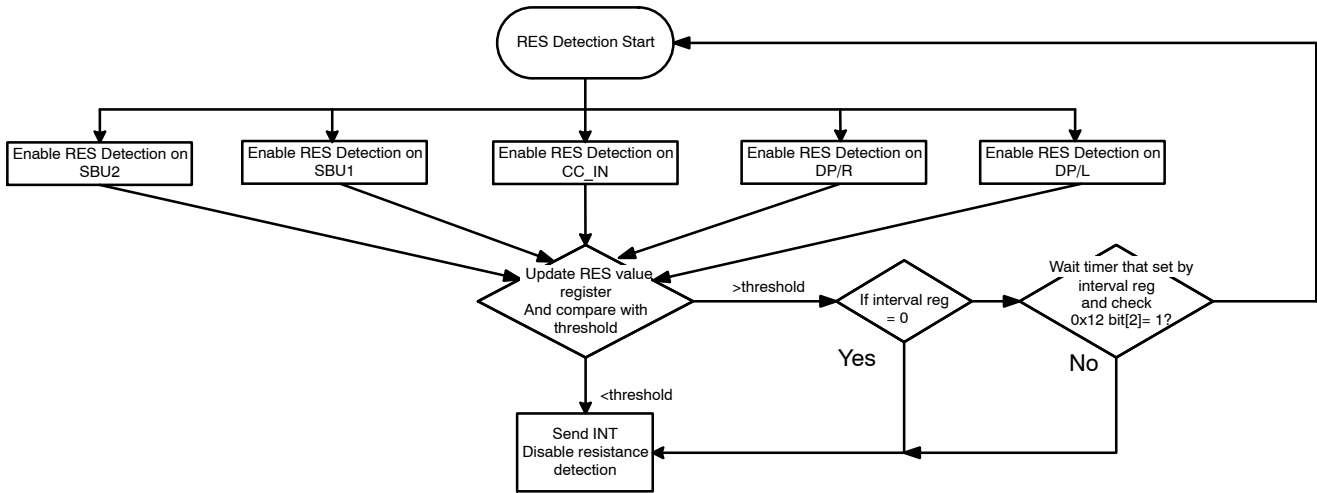


Figure 5.

### Manual Switch Control

The function is active during control bit 0x12h bit[4] = 1 and 0x04h = FF. It will provide manual control for device.

During this configuration, ADDR and INT pins will be set as logic control input.

#### MANUAL SWITCH CONTROL

(The function is active during control bit 0x12h bit[4] = 1 and 0x04h = FF. It will provide manual control for device. During this configuration, ADDR and INT pins will be set as logic control input.)


| Power | ENN | ADDR | INT | SENSE Switch         | Headset Detection | USB Switch                      | Audio Switch                  | MIC/ Audio GND Switch                   | SBU by Pass Switch                      |
|-------|-----|------|-----|----------------------|-------------------|---------------------------------|-------------------------------|-----------------------------------------|-----------------------------------------|
| OFF   | X   | X    | X   | OFF                  | OFF               | OFF                             | OFF                           | OFF                                     | OFF                                     |
| ON    | H   | X    | X   | OFF                  | OFF               | OFF                             | OFF                           | OFF                                     | OFF                                     |
| ON    | L   | 0    | 0   | OFF                  | OFF               | ON:<br>DP_R to DP<br>DN_L to DN | OFF                           | OFF                                     | ON:<br>SBU1 to SBU1_H<br>SBU2 to SBU2_H |
| ON    | L   | 0    | 1   | OFF                  | OFF               | ON:<br>DP_R to DP<br>DN_L to DN | OFF                           | OFF                                     | ON:<br>SBU1 to SBU2_H<br>SBU2 to SBU1_H |
| ON    | L   | 1    | 0   | ON<br>GSBU2 to SESNE | ON                | OFF                             | ON:<br>DP_R to R<br>DN_L to L | ON:<br>SBU1 to MIC<br>SBU2 to Audio GND | OFF                                     |
| ON    | L   | 1    | 1   | ON<br>GSBU1 to SESNE | ON                | OFF                             | ON:<br>DP_R to R<br>DN_L to L | ON:<br>SBU2 to MIC<br>SBU1 to Audio GND | OFF                                     |

## I<sup>2</sup>C INTERFACE

The FSA4480 includes a full I<sup>2</sup>C slave controller. The I<sup>2</sup>C slave fully complies with the I<sup>2</sup>C specification version 2.1


requirements. This block is designed for fast mode, 400 kHz, signals.

Examples of an I<sup>2</sup>C write and read sequence are shown in below figures respectively.



NOTE: Single Byte read is initiated by Master with P immediately following first data byte.

Figure 6. I<sup>2</sup>C Write Example

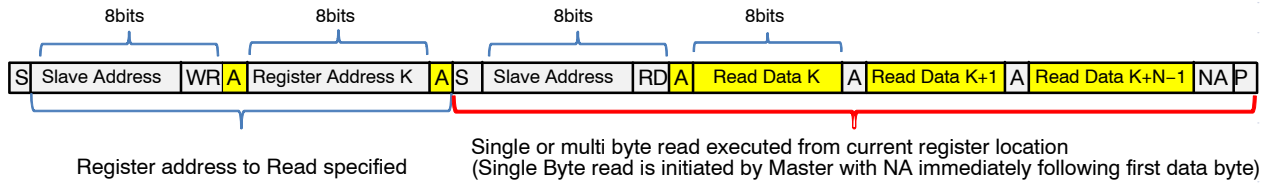

NOTE: If Register is not specified Master will begin read from current register. In this case only sequence showing in Red bracket is needed

|                      |                                |                                      |                         |
|----------------------|--------------------------------|--------------------------------------|-------------------------|
| From Master to Slave | <b>S</b> Start Condition       | <b>NA</b> NOT Acknowledge (SDA High) | <b>RD</b> Read = 1      |
| From Slave to Master | <b>A</b> Acknowledge (SDA Low) | <b>WR</b> Write = 0                  | <b>P</b> Stop Condition |

Figure 7. I<sup>2</sup>C Read Example

## TEST DIAGRAMS


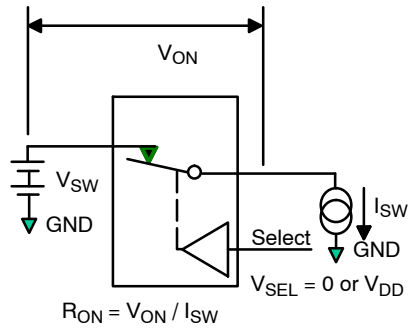


Figure 8. On Resistance

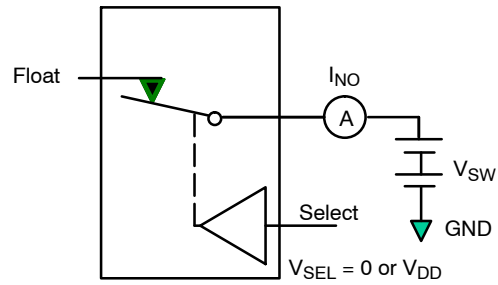

NOTE: Each switch port is tested separately.


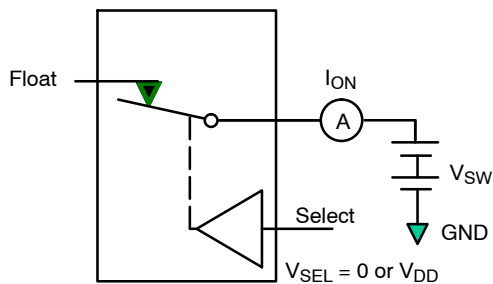
Figure 9. Off Leakage ( $I_{OZ}$ )

Figure 10. On Leakage

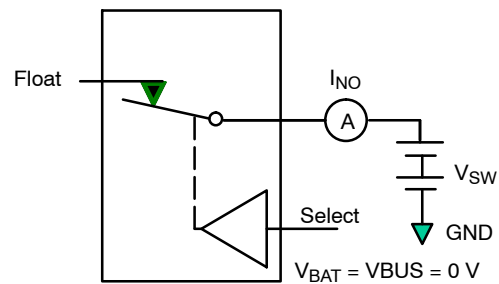

NOTE: Each switch port is tested separately.

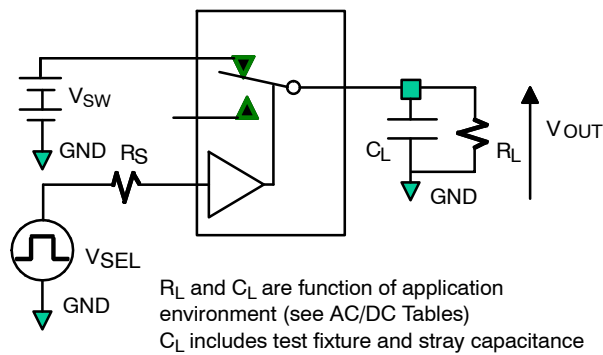
Figure 11. Power Off Leakage ( $I_{OFF}$ )

Figure 12. Test Circuit Load

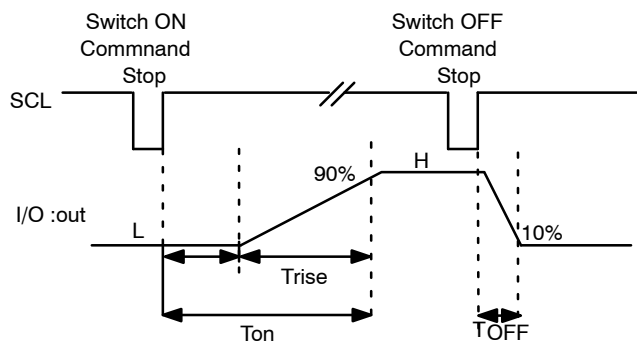


Figure 13. Turn On/Off Waveforms under Manual Mode

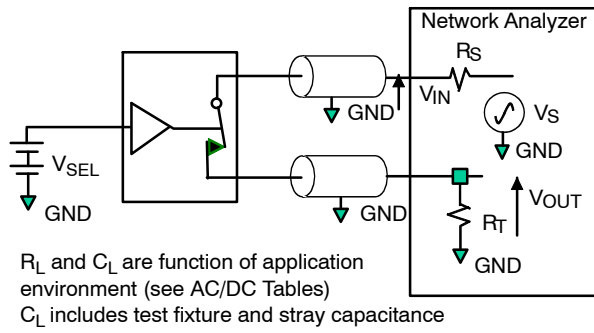


Figure 14. Bandwidth

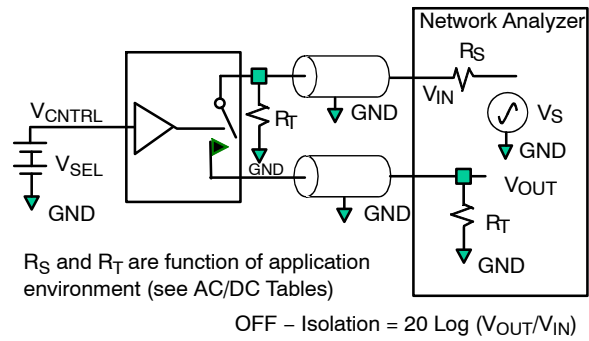


Figure 15. Channel Off Isolation

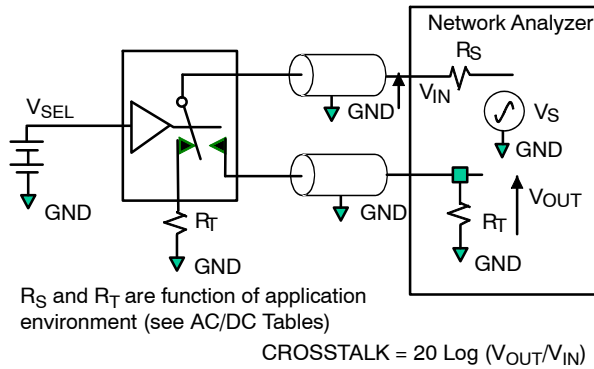


Figure 16. Adjacent Channel Crosstalk

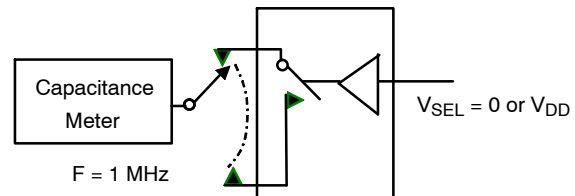


Figure 17. Channel Off Capacitance

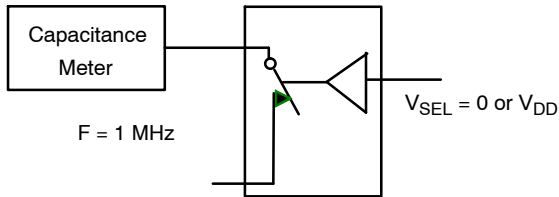


Figure 18. Channel On Capacitance

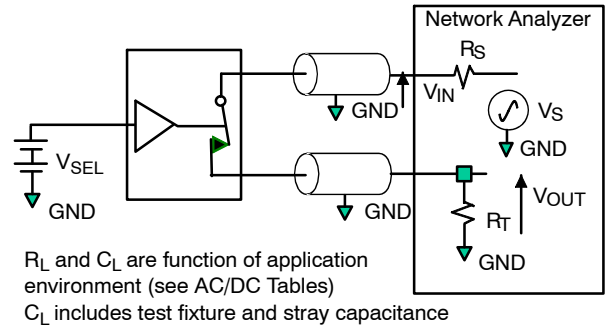


Figure 19. Total Harmonic Distortion (THD + N)




## ORDERING INFORMATION

| Part Number | Top Mark | Package       | D      | E      | X      | Y      |
|-------------|----------|---------------|--------|--------|--------|--------|
| FSA4480UCX  | 6D       | 25-Ball WLCSP | 2.24mm | 2.28mm | 0.32mm | 0.34mm |



**WLCSP25 2.24x2.28x0.586**  
CASE 567UZ  
ISSUE B


DATE 03 JAN 2018

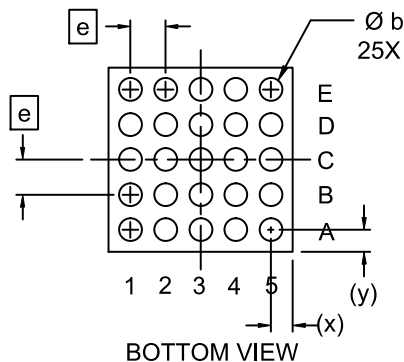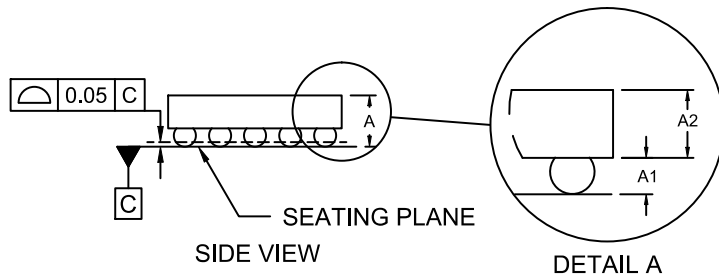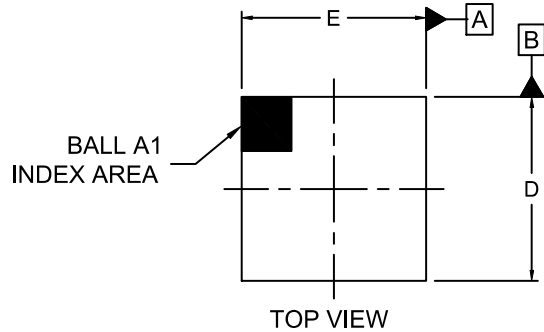

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DATUM C APPLIES TO THE SPHERICAL CROWN OF THE SOLDER BALLS

| DIM | MILLIMETERS |       |       |
|-----|-------------|-------|-------|
|     | MIN.        | NOM.  | MAX.  |
| A   | 0.547       | 0.586 | 0.625 |
| A1  | 0.178       | 0.208 | 0.238 |
| A2  | 0.360       | 0.378 | 0.396 |
| b   | 0.24        | 0.26  | 0.28  |
| D   | 2.250       | 2.280 | 2.310 |
| E   | 2.210       | 2.240 | 2.270 |
| e   | 0.40 BSC    |       |       |
| x   | 0.305       | 0.320 | 0.335 |
| y   | 0.325       | 0.340 | 0.355 |

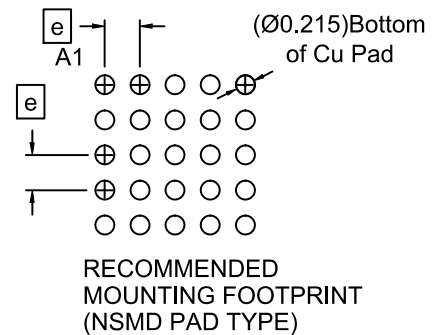

|                         |                                |                                                                                                                                                                                  |
|-------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON73488G</b>             | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>WLCSP25 2.24x2.28x0.586</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)