



SERIES RP 3502 SWITCHES

PUSHBUTTON SWITCHES - PANEL MOUNT

TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

DIP SWITCHES

KEYLOCK SWITCHES

ROTARY SWITCHES

DETECTOR SWITCHES

CAP OPTIONS



SPECIFICATIONS

Contact Rating:	3A @ 120 VAC 1.5A @ 250 VAC
Life Expectancy (Mechanical):	6,000 cycles
Life Expectancy (Electrical):	6,000 cycles
Contact Resistance:	50mΩ (initial max.)
Insulation Resistance:	500MΩ min.
Dielectric Strength:	1,000 VAC 1 minute
Operating Temperature:	-20°C to +65°C

MATERIALS

Plastic:	Nylon (UL flame: 94V-2)
Metal:	Nickel plated brass


FEATURES & BENEFITS

- ▶ Single Pole, Single throw with momentary function
- ▶ Rugged, Panel mount design
- ▶ Available in Nylon or metal frame body

APPLICATIONS/MARKETS

- ▶ Test & Instrumentation
- ▶ Industrial controls
- ▶ Telecommunications
- ▶ Networking

▶ ▶ ▶ HOW TO ORDER

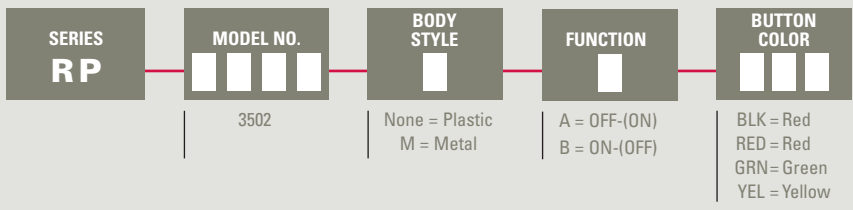

▶ ▶ ▶ Example Ordering Number
RP-3502-M-A-BLK

Specifications subject to change without notice.

RP 3502

