


# Switching element

71-671.026

Distribution by  
DigiKey

**DigiKey**

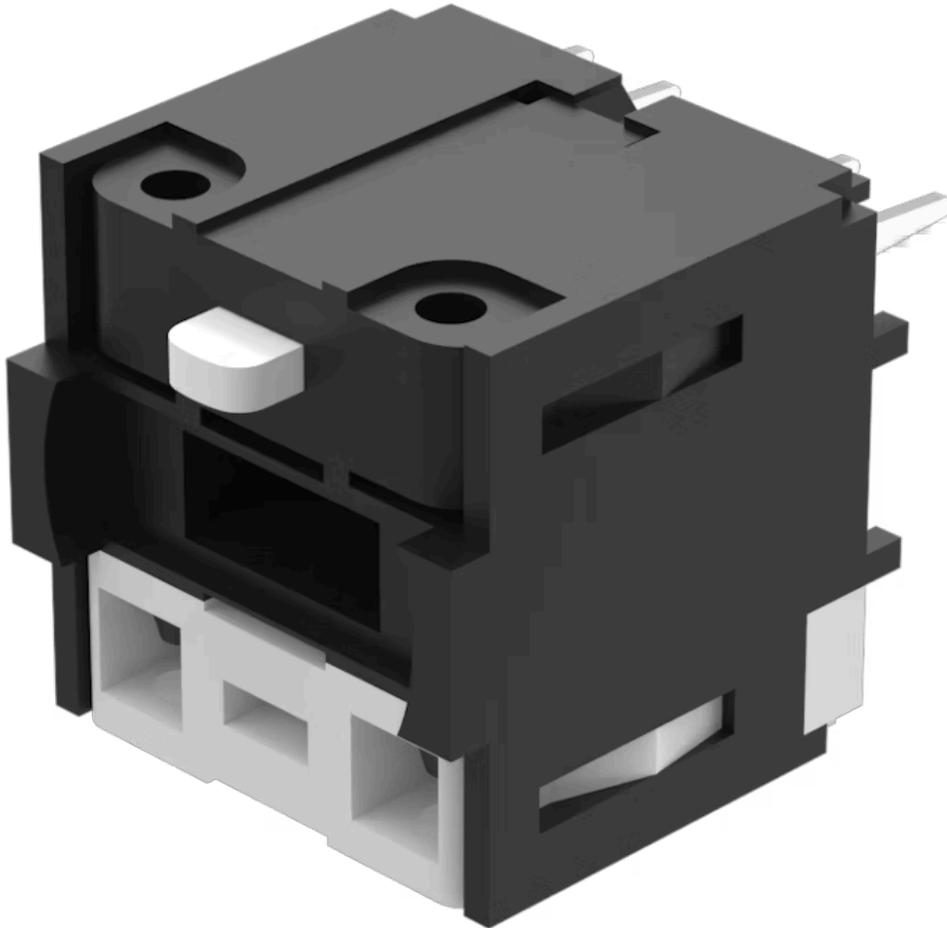

<https://digikey.eao.com/p/71-671.026>

Your product:

---



## 71-671.026

### Switching element

#### ELECTRICAL CHARACTERISTICS

**Contacts:** 1 NC / 1 NO

**Switching rating:** 250 V @ 3 A

#### MECHANICAL CHARACTERISTICS

**Terminal:** PCB terminal

**Contact material:** Gold

**Switching system:** Snap-action switching element

**Switching positions:** 2 positions

**Weight:** 0.005 kg

#### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

#### OTHER


**Short Description:** Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 1 NC / 1 NO, PCB terminal

**Housing material:** Plastic, according to UL 94 V0


**Product attributes:** Including locking pin

**Hints:** Including locking pin

**Wiring diagrams:**

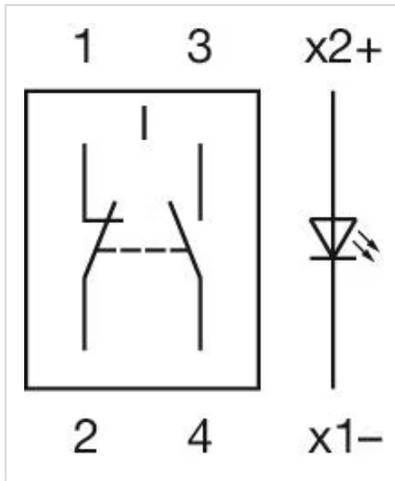

**Component layouts:**

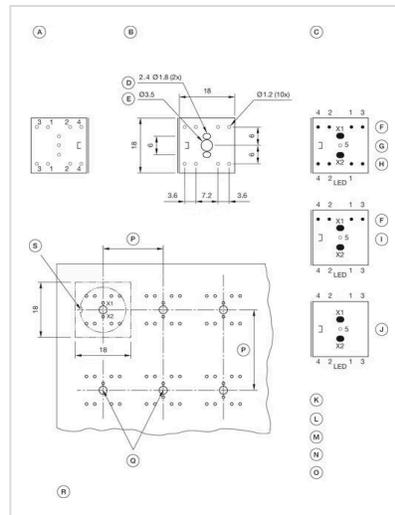

- A = Terminals (rear side)
- B = Drilling plan (component side)
- C = non-metallic
- D = Cu-Pad
- E = Occupancy plan (component side)
- F = 1. Switch
- G = Switching element 2 Normaly close + 2 Normaly open, Part No. 71-672.026
- H = 2. Switches
- I = Switching element 1 Normaly close + 1 Normaly open, Part No. 71-671.026
- J = Illumination element, Part No. 71-670.026
- K = X1 Lamp cathode (-)
- L = X2 Lamp anode (+)
- M = 1-2 Contact normally closed
- N = 3-4 Contact normally open
- O = 5 Hole for interlocking pin
- P = Front dimension min.
- Q = Position interlocking pin
- R = Note:  
Pitch of the print circuit board hole Ø3.5
- S = Slot in actuator

must agree with the mounting holes on the front plate  
S = Slot in actuator