


Switching element

71-672.026

Distribution by
DigiKey

DigiKey

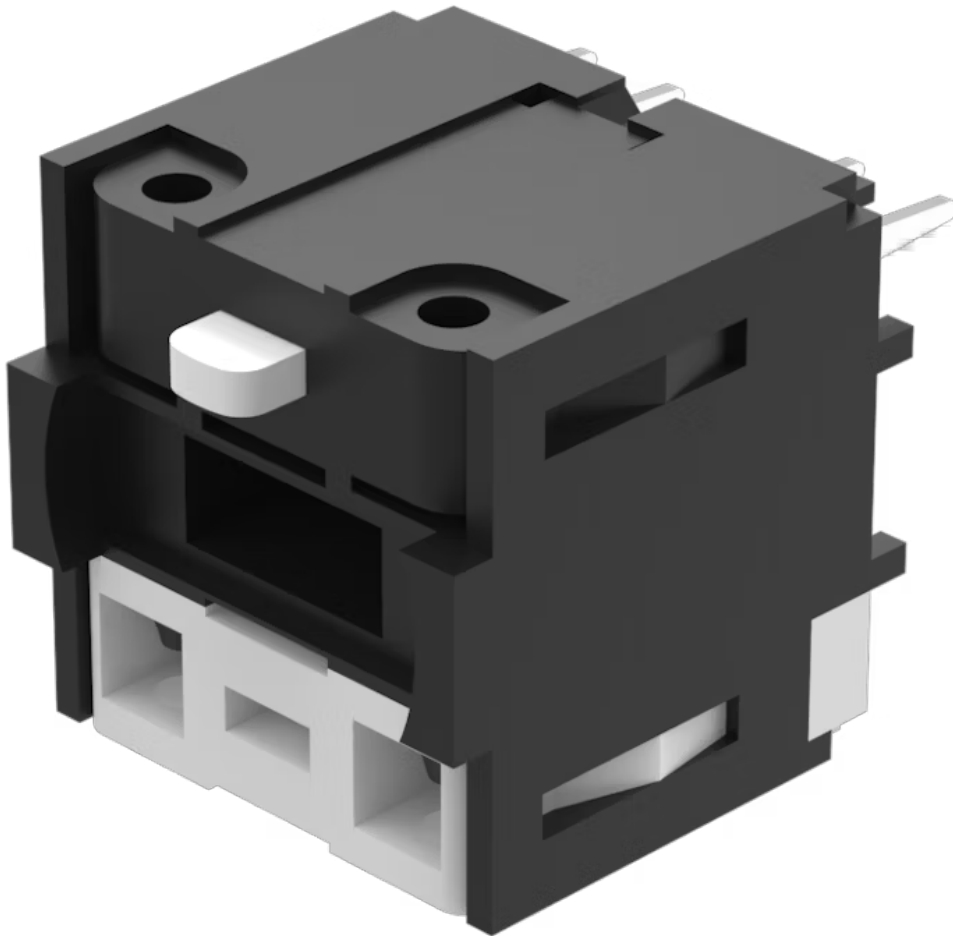

<https://digikey.eao.com/p/71-672.026>

Your product:



71-672.026

Switching element

ELECTRICAL CHARACTERISTICS

Contacts: 2 NC / 2 NO

Switching rating: 250 V @ 3 A

MECHANICAL CHARACTERISTICS

Terminal: PCB terminal

Contact material: Gold

Switching system: Snap-action switching element

Switching positions: 3 positions

Weight: 0.005 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description: Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 2 NC / 2 NO, PCB terminal

Housing material: Plastic, according to UL 94 V0


Product attributes: Including locking pin

Hints: Including locking pin

Wiring diagrams:

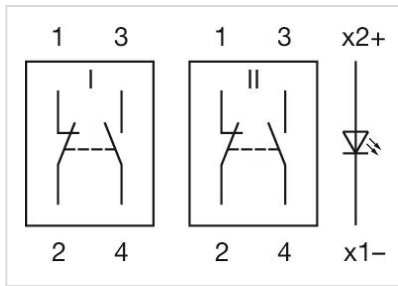

Component layouts:

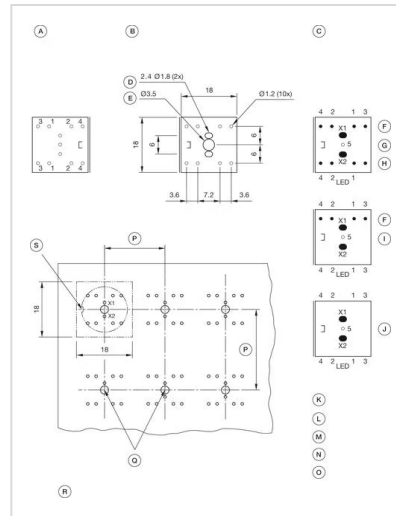

- A = Terminals (rear side)
- B = Drilling plan (component side)
- C = non-metallic
- D = Cu-Pad
- E = Occupancy plan (component side)
- F = 1. Switch
- G = Switching element 2 Normally close + 2 Normally open, Part No. 71-672.026
- H = 2. Switches
- I = Switching element 1 Normally close + 1 Normally open, Part No. 71-671.026
- J = Illumination element, Part No. 71-670.026
- K = X1 Lamp cathode (-)
- L = X2 Lamp anode (+)
- M = 1-2 Contact normally closed
- N = 3-4 Contact normally open
- O = 5 Hole for interlocking pin
- P = Front dimension min.
- Q = Position interlocking pin
- R = Note:

Pitch of the print circuit board hole Ø3.5
must agree with the mounting holes on the front plate
S = Slot in actuator