

# Product data sheet

Specifications



Disconnect switch, TeSys VLS,  
body switch, 125A, 60HP at  
480VAC, UL98, three phase, 100kA  
SCCR, size 2, door mount

VLS3P125D2

## Main

|                   |                |
|-------------------|----------------|
| Range             | TeSys          |
| Product Name      | TeSys VARIO LS |
| Device Short Name | VLS3P          |
| Product Type      | Switch body    |

## Complementary

|  |   |
|--|---|
| Mounting Support                             | Door  |
| Performance Level                            | High performance  |
| Number of Poles                              | 3P  |
| Contact Type and Composition                 | 3 NO  |
| Color  | Grey  |
| [Ue] UL Rated Operational Voltage            | 600 V AC 50/60 Hz UL 508  |
| Network type                                 | AC  |
| Network frequency                            | 50/60 Hz  |
| UL Maxium Horsepower Ratings                 | 30 hp 200/208 V AC<br>30 hp 240 V AC<br>60 hp 480 V AC<br>60 hp 600 V AC<br>7.5 hp 120 V AC<br>10 hp 240 V AC   |
| [Ue] IEC Rated Operational Voltage           | 690 V AC 50/60 Hz   |
| IEC Rated Operational Power in W             | 55 kW 400 V AC-23A)<br>45 kW 500 V AC-23A)<br>45 kW 690 V AC-23A)   |
| [Ie] Rated Operational Current               | 100 A Ue: 600 V UL98<br>125 A AC-21A Ue: 400 V<br>125 A AC-21A Ue: 500 V<br>125 A AC-21A Ue: 690 V<br>125 A AC-22A Ue: 400 V<br>125 A AC-22A Ue: 500 V<br>125 A AC-22A Ue: 690 V<br>125 A AC-23A Ue: 400 V<br>100 A AC-23A Ue: 500 V<br>47 A AC-23A Ue: 690 V |
| [Ith] Conventional Free Air Thermal Current  | 125 A (at 131 °F (55 °C))   |
| [Ithe] Conventional Enclosed Thermal Current | 100 A   |
| Making capacity ( I Rms)                     | 1250 A 690 V AC-23A<br>187.5 A 690 V AC-21A<br>375 A 690 V AC-22A   |

|   |  |
|---|--|
| <b>Breaking Capacity</b>                            | 187.5 A 690 V AC-21A)<br>375 A 690 V AC-22A)<br>1000 A 690 V AC-23A)   |
| <b>SCCR</b>   | Circuit-breaker 250 A maximum: 100 kA at 480 V AC<br>Fuse CC 200 A maximum: 100 kA at 480 V AC<br>Fuse J 200 A maximum: 100 kA at 480 V AC<br>Fuse T 200 A maximum: 100 kA at 480 V AC<br>Fuse CC 100 A maximum: 50 kA at 600 V AC<br>Fuse J 100 A maximum: 50 kA at 600 V AC<br>Fuse T 100 A maximum: 50 kA at 600 V AC |
| <b>Rated Conditional Short Circuit Current</b>      | 50 kA 400 V 125 A gG   |
| <b>[Icm] Rated Short Circuit Making Capacity</b>    | 3550 A 690 V   |
| <b>Intermittent duty class</b>                      | Class 120 - 60 %   |
| <b>[Uimp] rated impulse withstand voltage</b>       | 8 kV   |
| <b>[Icw] rated short-time withstand Rms current</b> | 2500 A 690 V 1 s   |
| <b>Mechanical Durability</b>                        | 30000 cycles   |
| <b>Electrical Durability</b>                        | 30000 cycles AC-21   |
| <b>UL Wire Size</b>                                 | AWG 12...AWG 1 copper  |
| <b>IEC Terminal Connection</b>                      | Power circuit screw clamp terminals 0.08 in <sup>2</sup> (50 mm <sup>2</sup> ) solid<br>Power circuit screw clamp terminals 0.1 in <sup>2</sup> (70 mm <sup>2</sup> ) flexible - without cable end   |
| <b>Tightening Torque</b>                            | Power circuit 44.3...53.1 lbf.in (5...6 N.m) screw clamp terminals   |
| <b>Height</b>                                       | 2.8 in (70 mm)   |
| <b>Width</b>  | 2.8 in (70 mm)   |
| <b>Depth</b>  | 3.9 in (100 mm)  |
| <b>Product Weight</b>                               | 0.805 lb(US) (0.365 kg)  |

## Environment

|  |  |
|--|--|
| <b>Standards</b>                             | UL98<br>CSA C22.2 No 4<br>IEC 60947-3  |
| <b>Product Certifications</b>                | cULus<br>GL  |
| <b>Degree of Protection</b>                  | IP20 conforming to IEC 60529   |
| <b>Mechanical Robustness</b>                 | Vibrations 2...100 Hz Fc 0.7 g) IEC 60068-2-6<br>Shocks 11 ms Ea 15 gn) IEC 60068-2-27 |
| <b>Ambient Air Temperature for Operation</b> | -13...131 °F (-25...55 °C)   |
| <b>Fire Resistance</b>                       | 1760 °F (960 °C) IEC 60695-2-11  |

## Packing Units

|                                     |                       |
|-------------------------------------|-----------------------|
| <b>Unit Type of Package 1</b>       | PCE                   |
| <b>Number of Units in Package 1</b> | 1                     |
| <b>Package 1 Height</b>             | 3.15 in (8.000 cm)    |
| <b>Package 1 Width</b>              | 3.35 in (8.500 cm)    |
| <b>Package 1 Length</b>             | 4.92 in (12.500 cm)   |
| <b>Package 1 Weight</b>             | 15.273 oz (433.000 g) |
| <b>Unit Type of Package 2</b>       | S03                   |
| <b>Number of Units in Package 2</b> | 27                    |

|                         |                           |
|-------------------------|---------------------------|
| <b>Package 2 Height</b> | 11.81 in (30.000 cm)      |
| <b>Package 2 Width</b>  | 11.81 in (30.000 cm)      |
| <b>Package 2 Length</b> | 15.75 in (40.000 cm)      |
| <b>Package 2 Weight</b> | 26.848 lb(US) (12.178 kg) |

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Use Better

|  <b>Materials and Substances</b> |           |
|---|-----------|
| Packaging made with recycled cardboard  | Yes       |
| Packaging without single use plastic  | No        |
| <a href="#">EU RoHS Directive</a>   | Compliant |

### Use Again


|  <b>Repack and remanufacture</b> |  |
|---|--|
| Take-back   | No   |
| WEEE Label  |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Technical Illustration

Dimensions

---

VLS3P030D2  
VLS3P063D2  
VLS3P080D2  
VLS3P100D2  
VLS3P125D2

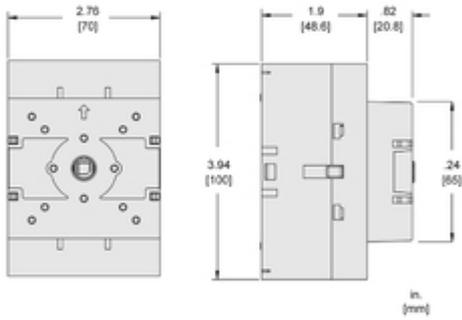

ALL DIMENSIONS ARE APPROXIMATE.  
REFER TO TECHNICAL DRAWINGS AND DOCUMENTATION FOR COMPLETE INFORMATION.