




Switches > Tactile Switches

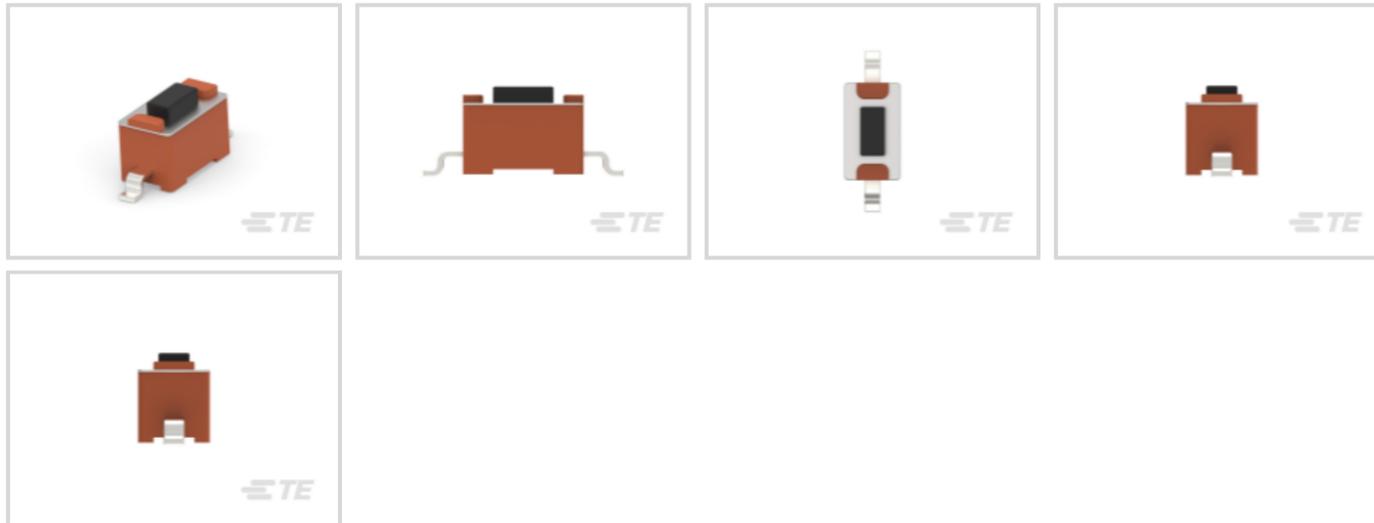

Actuator Style: **Rectangular Actuator**

Operating Function: **Off (On)**

Contact Base Material: **Brass**

Switch Contact Plating Material: **Silver**

Low Profile: **With**

Features

Product Type Features

| | |
|------------------------|-----------------------|
| Leg Style | Gull Wing |
| Switch Connection Type | Printed Circuit Board |
| Illuminated | Without |
| Actuator Style | Rectangular Actuator |

Configuration Features

| | |
|----------------------------|----------------------------|
| Switch Feedback Type | Tactile |
| ESD Grounding Terminal | Without |
| Ganged | With |
| Operating Function | Off (On) |
| Support Bracket | Without |
| Configuration (Pole-Throw) | Single Pole - Single Throw |
| Number of Actuators | Single |

Electrical Characteristics

| | |
|-------------------|--------|
| Operating Voltage | 24 VDC |
|-------------------|--------|



Body Features

| | |
|---------------------|-----------------|
| Case Material | Nylon |
| Actuator Profile | Extended |
| Case Color | Brown |
| Actuator Material | PPS |
| Cover Material | Stainless Steel |
| Actuator Force | 180 g[6.34 oz] |
| Product Orientation | Vertical |
| Actuator Color | Black |

Contact Features

| | |
|---------------------------------|--------|
| Contact Base Material | Brass |
| Switch Contact Plating Material | Silver |
| Contact Current Rating | 50 mA |

Termination Features

| | |
|---------------------------|---------------|
| Termination Method to PCB | Surface Mount |
|---------------------------|---------------|

Housing Features

| | |
|----------------|------|
| Low Profile | With |
| Process Sealed | No |

Dimensions

| | |
|-----------------|------------------|
| Button Width | 2.99 mm[.118 in] |
| Product Height | 4.5 mm[.18 in] |
| Actuator Length | 1.07 mm[.042 in] |

Usage Conditions

| | |
|-----------------------------|---------------------------|
| Operating Temperature Range | -35 – 85 °C[-31 – 185 °F] |
|-----------------------------|---------------------------|

Packaging Features

| | |
|------------------|------------|
| Packaging Method | Reel & Box |
|------------------|------------|

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Out of Scope |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |



EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2025 (250)

Candidate List Declared Against: JAN 2025 (247)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 2-1977223-8
FSM14JSMAS=6MM TACT SWITCH, SMT 160gf



TE Part # 2-1825910-7
FSM14JH=6MM TACT SWITCH, HIGH TEMP



TE Part # 3-1437565-0
FSM2JSMATR=ON T/R



TE Part # 4-1437565-2
FSM4JSMATR=TACT SWITCH 6X6MIL



TE Part # 1825910-6
FSM4JH=6MM TACT SWITCH, HIGH TEMP

Also in the Series | **ALCOSWITCH FSM**



Tactile Switches(58)

Customers Also Bought




TE Part #1241965-4
STANDARD TIMER HSG. WITH EXT. LOCK.



TE Part #CAT-C339-SM1A
SMD Power Resistor: 7 Watt, 0.10-500 Ohm




TE Part #1903601-5
DYNAMIC D-3100D V-HDR ASSY 8P TIN




TE Part #2029054-5
5P VAL-U-LOK SR HDR SN V2 W/DH TIN



TE Part #9-2176231-3
3522 68K 1% 3W



TE Part #6-2176315-0
MELF SMA_A 6K8 1% 50PPM 0204 0.4 W



TE Part #2-2176344-0
CRGCO 1206 1K5 5%



TE Part #7-2176554-1
3430 A2 1% 750R 100ppm 1k RL



TE Part #2-2176597-1
RLC73PW 2H R068 1% 4K RL

Documents

Product Drawings

[FSMSMTR=TACT SWITCH](#)

English

CAD Files

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG_CVM_CVM_1437566-4_C_c-1437566-4-c.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_1437566-4_C_c-1437566-4-c.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1437566-4_C_c-1437566-4-c.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SWITCHES_CORE_PROGRAM_CATALOG](#)

English

[Products for Mobile Equipment](#)

English

[Tactile Switches](#)

English

[8-1773450-9_SWITCHES_CATALOG_SECTION_C_TACTILE_SWITCHES](#)

English