




Relays & Contactors > Electromechanical Relays > Standard Signal Relay 2 Form C,2 CO Cont

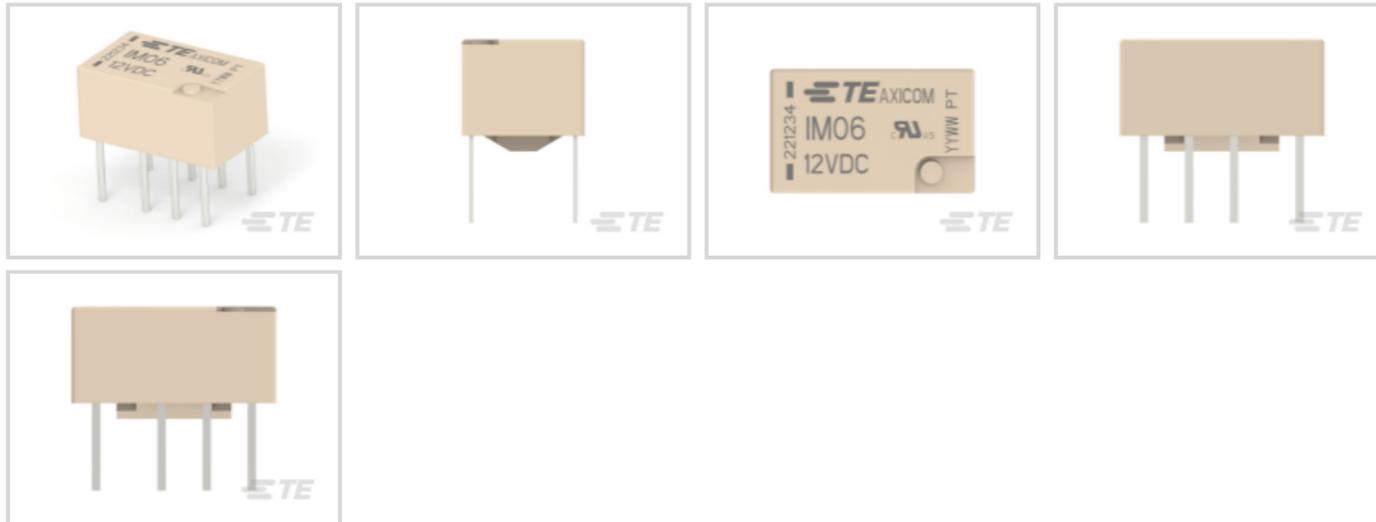

Relay & Contactor Type: **General Purpose Signal Relay**

Coil Magnetic System: **Polarized, Monostable**

Contact Arrangement: **2 Form C DPDT-CO**

Current Type: **DC**

Contact Current Rating: **2 A**

[All Standard Signal Relay 2 Form C,2 CO Cont \(72\)](#)

Features

Product Type Features

| | |
|------------------------|------------------------------|
| Relay & Contactor Type | General Purpose Signal Relay |
|------------------------|------------------------------|

Configuration Features

| | |
|--------------------------|---------------------------|
| Contact Special Features | Bifurcated/Twin Contacts |
| Relay Options | Power Switching, RF Rated |
| Contact Number of Poles | 2 |
| Contact Arrangement | 2 Form C DPDT-CO |

Electrical Characteristics

| | |
|---|----------|
| Contact Limiting Short-Time Current | 2 A |
| Contact Limiting Making Current | 2 A |
| Contact Limiting Continuous Current | 2 A |
| Contact Limiting Breaking Current | 2 A |
| Insulation Initial Dielectric Between Open Contacts | 750 Vrms |



| | |
|---|----------------------------------|
| Insulation Initial Dielectric Between Adjacent Contacts | 1000 Vrms |
| Contact Switching Voltage (Max) | 250 VAC |
| Contact Switching Load (Min) | .1mA @ .0001V |
| Voltage Standing Wave Ration (HF Parameter) | 1.06db @ 100MHz, 1.49db @ 900MHz |
| Coil Resistance | 1029 Ω |
| Insulation Initial Resistance | 1000000 M Ω |
| Contact Current Rating | 2 A |
| Coil Voltage Rating | 12 VDC |
| Contact Voltage Rating | 220 VDC |
| Coil Power Rating DC | .14 W |
| Insulation Initial Dielectric Between Contacts & Coil | 1800 Vrms |

Signal Characteristics

| | |
|-------------------------------|----------------------------------|
| Isolation (HF Parameter) | -18.8dB @ 900MHz, -37dB @ 100MHz |
| Insertion Loss (HF Parameter) | -.03dB @ 100MHz, -.33dB @ 900MHz |

Body Features

| | |
|----------------|---------------------|
| Product Weight | .75 g[.026 oz] |
| Enclosure Type | Hermetically Sealed |

Contact Features

| | |
|--------------------------|------|
| Contact Plating Material | Gold |
| Contact Material | PdRu |

Termination Features

| | |
|------------------------------------|-------------|
| Main Termination & Connection Type | Solder Pins |
| Coil Termination & Connection Type | Solder Pins |

Mechanical Attachment

| | |
|--------------------|-------------|
| Product Mount Type | Board Mount |
|--------------------|-------------|

Dimensions

| | |
|----------------|------------------|
| Product Width | 6 mm[.236 in] |
| Product Length | 10 mm[.393 in] |
| Product Height | 5.65 mm[.222 in] |

Usage Conditions

| | |
|--------------------------------------|---------------------------|
| Operating Temperature Range | -40 – 85 °C[-40 – 185 °F] |
| Environmental Category of Protection | RTV |



| | |
|---|---------------|
| Environmental Ambient Temperature (Max) | 85 °C[185 °F] |
|---|---------------|

Operation/Application

| | |
|----------------------|-----------------------|
| Solder Process | Wave Solder Capable |
| Coil Magnetic System | Polarized, Monostable |
| Current Type | DC |

Packaging Features

| | |
|------------------|------|
| Packaging Method | Tube |
|------------------|------|

Other

| | |
|---------------------------|------------------|
| Coil Power Rating Class | ≤.15 W |
| Contact Current Class | ≤2 A |
| Height Class (Mechanical) | ≤7 mm[≤.276 in] |
| Length Class (Mechanical) | ≤11 mm[≤.433 in] |
| Width Class (Mechanical) | ≤7 mm[≤.276 in] |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)


| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC |
| Halogen Content | Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free |
| Solder Process Capability | Wave solder capable to 265°C |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # CAT-AX41-IM11B
Standard Signal Relay 2 Form C,2 CO Cont



TE Part # 1-1462038-6
IM06NS=IM RELAY 140mW 12V


Also in the Series | Axicom IM



DC Relays(142)



Electromechanical Relays(142)



General Purpose Signal Relays(142)

Customers Also Bought



TE Part #144680-E
MSPEED 50 M SMD M1 * AB VV 137 094 ** E



TE Part #214357-E
MSPPM 5 M SMD M1 * A V 137 094 * E008 J



TE Part #214356-E
MSPPM 5 F SMD F4 * A V 137 094 * E008 J



TE Part #224512-E
MSPEED 50 F SMD F6 * AB VV 137 094 ** E



TE Part #8-338728-2
MICROM. MOB SMD CON



TE Part #350833-1
04P UMNL HDR ASSY PC 94VO



TE Part #5-1622825-5
RL73K 2A R18 5% 5K RL



TE Part #2176306-9
RP 1E 0.1W 1K4 0.1% 25PPM 5K RL



Documents

Product Drawings

[IM06TS=IM RELAY 140mW 12V](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_2-1462037-7_B4.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1462037-7_B4.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-1462037-7_B4.2d_dxf.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Transportation, Storage, Handling, Assembly and Testing of Axicom Through Hole Terminal \(THT\) Relays](#)

English

[IM_Datasheet](#)

English

Product Specifications

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English