

# PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/in/products/1015526>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop, safety doors, light grids up to SIL 3, Cat. 4, PL e, 1- or 2-channel operation, cross-circuit detection, can be retrigged, off-/on delay of 0.2 s to 300 s, 5 enabling current paths,  $U_S = 24$  V DC, plug-in Push-in terminal block

## Your advantages

- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061
- Low housing width of only 22.5mm
- 1- and 2-channel control
- 5 enabling current paths, 1 digital signal output
- Manually monitored and automatic activation in a single device

## Commercial data

Item number	1015526
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DNA
Product key	DNA181
Catalog page	Page 227 (C-6-2019)
GTIN	4055626496566
Weight per piece (including packing)	246 g
Weight per piece (excluding packing)	214.73 g
Customs tariff number	85371098
Country of origin	DE

## Technical data

### Notes

#### Note on application

Note on application	Only for industrial use
---------------------	-------------------------

### Product properties

Product type	Safety relays
Product family	PSRmini
Application	Emergency stop
	Safety door
	Light grid
Control	1 and 2 channel
Relay type	Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3

#### Insulation characteristics

Overvoltage category	III
Degree of pollution	2

#### Times

Typical response time	< 50 ms (automatic start)
	< 50 ms (manual, monitored start)
Typ. starting time with $U_S$	500 ms (with $U_S$ when controlled via A1)
Typical release time	< 25 ms (when controlled via S12 and S22 (only for undelayed contacts))
	< 10 ms (when controlled via A1; applicative deactivation via A1/A2 is not permitted)
Delay time range	0.2 s ... 300 s $\pm 5$ % (can be set for 47/48/58)
Restart time	< 1 s (Boot time)
Recovery time	500 ms (following demand of the safety function)

### Electrical properties

Maximum power dissipation for nominal condition	8.1 W (At $U_S = 30$ V, $I_L^2 = 108$ A <sup>2</sup> )
Nominal operating mode	100% operating factor
Rated insulation voltage	250 V AC
Rated surge voltage/insulation	See section "Insulation coordination"
	Safe isolation, reinforced insulation 6 kV between (A1, A2, S11, S12, S21, S22, S34, M1) and enabling current path (13/14) and enabling current path (23/24/34) and enabling current path (47/48/58)

#### Supply

Designation	A1/A2
Rated control circuit supply voltage $U_S$	19.2 V DC ... 30 V DC
Rated control circuit supply voltage $U_S$	24 V DC -20 % / +25 %

# PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/in/products/1015526>

Rated control supply current $I_S$	typ. 80 mA
Power consumption at $U_S$	typ. 1.92 W
Inrush current	typ. 28 A ( $\Delta t = 30 \mu s$ at $U_S$ )
Filter time	1 ms (For the logic. At A1 in the event of voltage dips at $U_S$ )
Protective circuit	Serial protection against polarity reversal; Suppressor diode

## Input data

### General

Limit frequency	min. 0 Hz
	max. 1 Hz

### Digital: Sensor circuit (S12, S22)

Description of the input	safety-related sensor inputs
Number of inputs	2
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Input current range "0" signal	0 mA ... 2 mA
Inrush current	< 11 mA (typ. with $U_S$ )
Filter time	max. 3 ms (Test pulse width of low test pulses)
	min. 21 ms (Test pulse rate for low test pulse)
Concurrency	$\infty$
Limit frequency	min. 0 Hz
	max. 1 Hz
Max. permissible overall conductor resistance	150 $\Omega$
Protective circuit	Varistor
Current consumption	< 4.5 mA (typ. with $U_S$ )

### Digital: Start circuit (S34)

Description of the input	non-safety-related
Number of inputs	1
Input voltage range "0" signal	0 V DC ... 5 V DC
Input voltage range "1" signal	11 V DC ... 30 V DC
Input current range "0" signal	0 mA ... 2 mA
Inrush current	< 8.6 mA (typ. with $U_S$ )
Filter time	max. 1 ms (Test pulse width of low test pulses)
	min. 21 ms (Test pulse rate for low test pulse)
Limit frequency	min. 0 Hz
	max. 1 Hz
Max. permissible overall conductor resistance	150 $\Omega$
Protective circuit	Varistor
Current consumption	< 3.2 mA (typ. with $U_S$ )

## Output data

Relay: Enabling current paths (13/14, 23/24/34, 47/48/58)

# PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/in/products/1015526>

Output description	2 N/O contacts each in series, safety-related, floating
Number of outputs	3 (undelayed: 13/14, 23/24/34)
	2 (delayed: 47/48/58)
Contact switching type	5 enabling current paths
Contact material	AgCuNi +0.2 µm ... 0.4 µm Au / AgSnO <sub>2</sub> +0.2 µm Au
Switching voltage	min. 12 V AC/DC
	max. 250 V AC/DC (Observe the load curve)
Switching capacity	min. 60 mW
Inrush current	min. 5 mA
	max. 6 A
Limiting continuous current	6 A
Sq. Total current	108 A <sup>2</sup> (observe derating)
Switching frequency	0.5 Hz (depending on the set delay time)
Mechanical service life	10x 10 <sup>6</sup> cycles
Output fuse	6 A gL/gG
	4 A gL/gG (for low-demand applications)

## Signal: M1

Output description	PNP
	non-safety-related
Number of outputs	1
Voltage	approx. 23 V DC (U <sub>S</sub> - 1 V)
Current	max. 100 mA
Maximum inrush current	500 mA (Δt = 10 ms at U <sub>S</sub> )
Protective circuit	Suppressor diode
Short-circuit protection	Yes

## Clock: S11, S21

Output description	PNP
	non-safety-related
Number of outputs	2
Voltage	corresponds to U <sub>S</sub>
Current	max. 100 mA
Maximum inrush current	500 mA (Δt = 10 ms at U <sub>S</sub> )
Protective circuit	Suppressor diode
Short-circuit protection	Yes

## Connection data

### Connection technology

pluggable	yes
-----------	-----

### Conductor connection

Connection method	Push-in connection
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>

# PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/in/products/1015526>

Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (only together with CRIMPFOX 6)
Conductor cross-section AWG	24 ... 16
Stripping length	8 mm

## Signaling

Status display	5 x bi-color LED
----------------	------------------

## Dimensions

Width	22.5 mm
Height	117.5 mm
Depth	114.5 mm

## Material specifications

Color (Housing)	yellow (RAL 1018)
Housing material	PA

## Characteristics

### Safety data

Stop category	0
	1

### Safety data: EN ISO 13849

Category	4
Performance level (PL)	e (4 A DC13; 3 A AC15; 8760 switching cycles/year)

### Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)	3
------------------------------	---

### Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)	3
------------------------------	---

### Safety data: EN IEC 62061

Safety Integrity Level (SIL)	3
------------------------------	---

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Min. degree of protection of inst. location	IP54
Ambient temperature (operation)	-35 °C ... 60 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m (Above sea level)
Max. permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Max. permissible relative humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Shock	10g (operation), 15g (transport)

# PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/in/products/1015526>

Vibration (operation)	10 Hz ... 150 Hz, 2g
-----------------------	----------------------

## Approvals

CE

Identification	CE-compliant
----------------	--------------

## Mounting

Mounting type	DIN rail mounting
Assembly note	See derating curve
Mounting position	vertical or horizontal

# PSR-MC73-5NO-1DO-24DC-SP - Safety relays




1015526


<https://www.phoenixcontact.com/in/products/1015526>

## Drawings

Circuit diagram

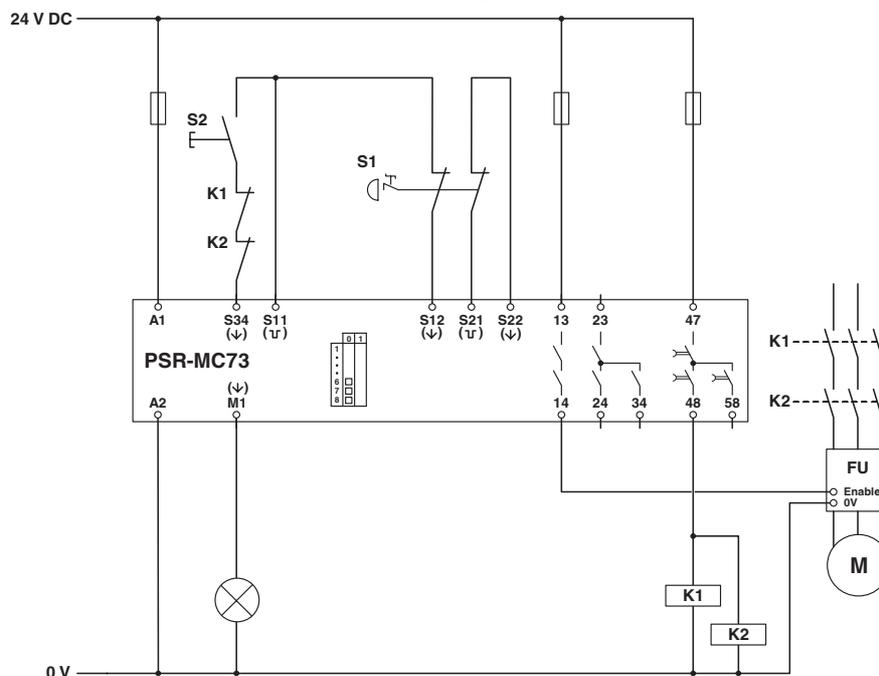

Block diagram

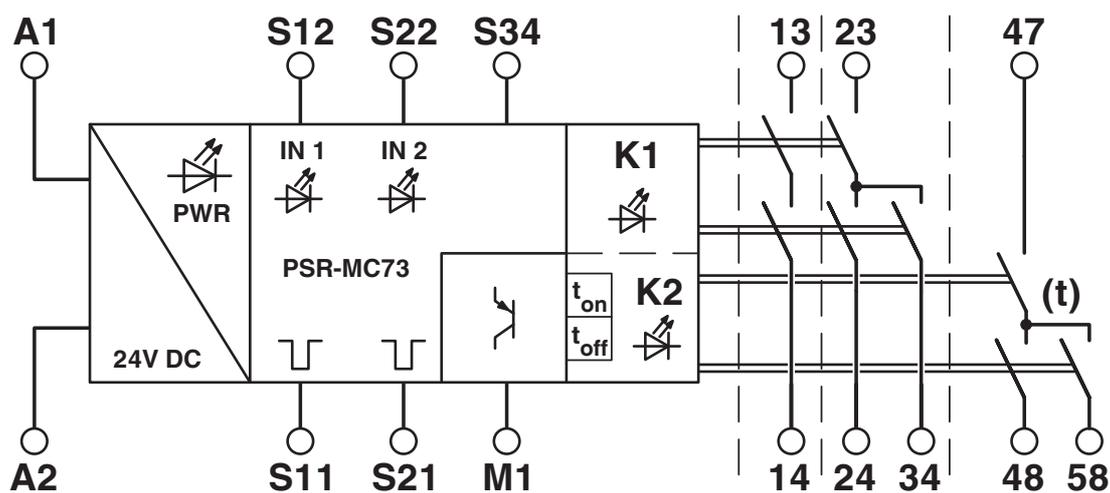

Block diagram

# PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/in/products/1015526>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1015526>



### Functional Safety

Approval ID: 01/205/5486.02/24



### cULus Listed

Approval ID: E140324

# PSR-MC73-5NO-1DO-24DC-SP - Safety relays



1015526

<https://www.phoenixcontact.com/in/products/1015526>

## Classifications

### ECLASS

ECLASS-13.0

27371819

### ETIM

ETIM 9.0

EC001449

### UNSPSC

UNSPSC 21.0

39122200

1015526

<https://www.phoenixcontact.com/in/products/1015526>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	3efdd2ea-dc63-46a1-9231-1f96d79904e0

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)