

1-1415898-1 ✓ ACTIVE



SCHRACK | SCHRACK Power PCB Relay RT Inrush Power

TE Internal #: 1-1415898-1

General Purpose Power Relay, DC, Monostable, 1 Form A SPST-NO, 16 A Contact Rating, 48 VDC Coil Voltage, SCHRACK Power PCB Relay RT Inrush Power

[View on TE.com >](#)

Relays & Contactors > Electromechanical Relays > PCB Power Relay: 16 Amp, Inrush



Relay & Contactor Type: **General Purpose Power Relay**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form A SPST-NO**

Current Type: **DC**

Contact Current Rating: **16 A**

[All PCB Power Relay: 16 Amp, Inrush \(17\)](#)

Features

Product Type Features

| | |
|------------------------|-----------------------------|
| Relay & Contactor Type | General Purpose Power Relay |
|------------------------|-----------------------------|

Configuration Features

| | |
|--------------------------|----------------------------|
| Contact Special Features | W Pre-Make Contact |
| Contact Number of Poles | 1 |
| Coil Special Features | UL Coil Insulation Class F |
| Contact Arrangement | 1 Form A SPST-NO |

Electrical Characteristics

| | |
|---|-----------|
| Contact Limiting Short-Time Current | 16 A |
| Contact Limiting Making Current | 165 A |
| Contact Limiting Continuous Current | 16 A |
| Contact Limiting Breaking Current | 16 A |
| Insulation Initial Dielectric Between Open Contacts | 1250 Vrms |



| | |
|---------------------------------|---------|
| Contact Switching Voltage (Max) | 400 VAC |
|---------------------------------|---------|

| | |
|-----------------|---------------|
| Coil Resistance | 5520 Ω |
|-----------------|---------------|

| | |
|------------------------|------|
| Contact Current Rating | 16 A |
|------------------------|------|

| | |
|---------------------|--------|
| Coil Voltage Rating | 48 VDC |
|---------------------|--------|

| | |
|------------------------|---------|
| Contact Voltage Rating | 250 VAC |
|------------------------|---------|

| | |
|----------------------|--------|
| Coil Power Rating DC | .417 W |
|----------------------|--------|

| | |
|---|-----------|
| Insulation Initial Dielectric Between Contacts & Coil | 5000 Vrms |
|---|-----------|

Body Features

| | |
|----------------|---------------|
| Product Weight | 14 g[.494 oz] |
|----------------|---------------|

| | |
|----------------|---|
| Enclosure Type | Flux Resistant Automatic Solder Capable |
|----------------|---|

Contact Features

| | |
|------------------|------------------------|
| Contact Material | W + AgSnO ₂ |
|------------------|------------------------|

Termination Features

| | |
|------------------------------------|-------------|
| Main Termination & Connection Type | Solder Pins |
|------------------------------------|-------------|

| | |
|------------------------------------|-------------|
| Coil Termination & Connection Type | Solder Pins |
|------------------------------------|-------------|

Mechanical Attachment

| | |
|--------------------|-------------|
| Product Mount Type | Board Mount |
|--------------------|-------------|

Dimensions

| | |
|---|----------------|
| Insulation Clearance Between Contact & Coil | 10 mm[.394 in] |
|---|----------------|

| | |
|--|----------------|
| Insulation Creepage Between Contact & Coil | 10 mm[.394 in] |
|--|----------------|

| | |
|---------------|----------------|
| Product Width | 12.7 mm[.5 in] |
|---------------|----------------|

| | |
|----------------|-----------------|
| Product Length | 29 mm[1.141 in] |
|----------------|-----------------|

| | |
|----------------|------------------|
| Product Height | 15.7 mm[.618 in] |
|----------------|------------------|

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 105 °C[-40 – 221 °F] |
|-----------------------------|----------------------------|

| | |
|--------------------------------------|------|
| Environmental Category of Protection | RTII |
|--------------------------------------|------|

| | |
|---|----------------|
| Environmental Ambient Temperature (Max) | 105 °C[221 °F] |
|---|----------------|

Operation/Application

| | |
|----------------|---------------------|
| Solder Process | Wave Solder Capable |
|----------------|---------------------|

| | |
|----------------------|------------|
| Coil Magnetic System | Monostable |
|----------------------|------------|

| | |
|--------------|----|
| Current Type | DC |
|--------------|----|

Packaging Features



| | |
|------------------|--------------------|
| Packaging Method | Box & Tray, Carton |
|------------------|--------------------|

Other

| | |
|---------------------------|---------------------------------|
| Coil Power Rating Class | >.3 – ≤.6 W |
| Contact Current Class | >10 – ≤16 A |
| Height Class (Mechanical) | >14 – ≤16 mm[>.551 – ≤.63 in] |
| Length Class (Mechanical) | >22 – ≤33 mm[>.866 – ≤1.299 in] |
| Width Class (Mechanical) | >11 – ≤14 mm[>.433 – ≤.551 in] |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Wave solder capable to 265°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 8-1415898-2
RTSET048

Also in the Series | SCHRACK Power PCB Relay RT Inrush Power



DC Relays(33)

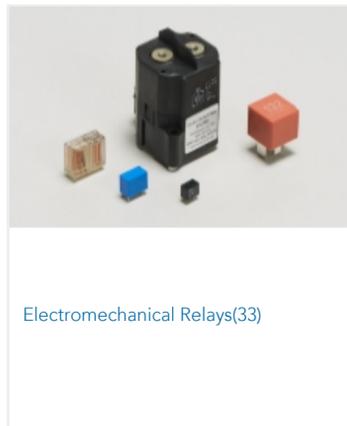

Electromechanical Relays(33)

Customers Also Bought



TE Part #5677562009
RNF-3000-3/1-0-STK



TE Part #1SNK505020R0000
ZS4-BL



TE Part #1SNK510010R0000
ZS16



TE Part #1SNK516150R0000
ZS35-PE



TE Part #NB17012001
DWP-125-1-1/2-0-STK



TE Part #9-1415036-1
PTMT00A0



TE Part #5-1415037-1
PT17016



TE Part #4-1419111-2
PT270024



TE Part #3-1618389-7
LEV100A4ANG=RELAY, 12Vdc SPST-NO



TE Part #8-1768016-9
CSL-05525P-9



Documents

CAD Files

Customer View Model

[ENG_CVM_CVM_1-1415898-1_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1415898-1_E.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-1415898-1_E.2d_dxf.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Power PCB Relay RT Inrush Power](#)

English

Product Specifications

[Definitions General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English