LV- 12- 24UC - Plug-in module

2833712

https://www.phoenixcontact.com/us/products/2833712

Plug-in module, for mounting on PR1 and PR2, with varistor and yellow LED, input voltage: 12 ... 24 V AC/ DC ±20 %

Your advantages

• Mechanical coding to protect against mismatching
• Attenuation of reverse voltage induced in coil

Commercial data

Item number	2833712
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	C463
Product key	DKF346
GTIN	4017918933906
Weight per piece (including packing)	2.93 g
Weight per piece (excluding packing)	2.78 g
Customs tariff number	85366990
Country of origin	CN

Technical data

Product properties

Product type	Plug-in module
Product family	ESSENTIAL edition

Electrical properties

Nominal voltage U_N	12 V AC/DC ... 24 V AC/DC

Input data

Input voltage range	12 V AC/DC ... 24 V AC/DC

LV- 12- 24UC - Plug-in module

2833712

https://www.phoenixcontact.com/us/products/2833712

Drawings

Circuit diagram

A2   A1
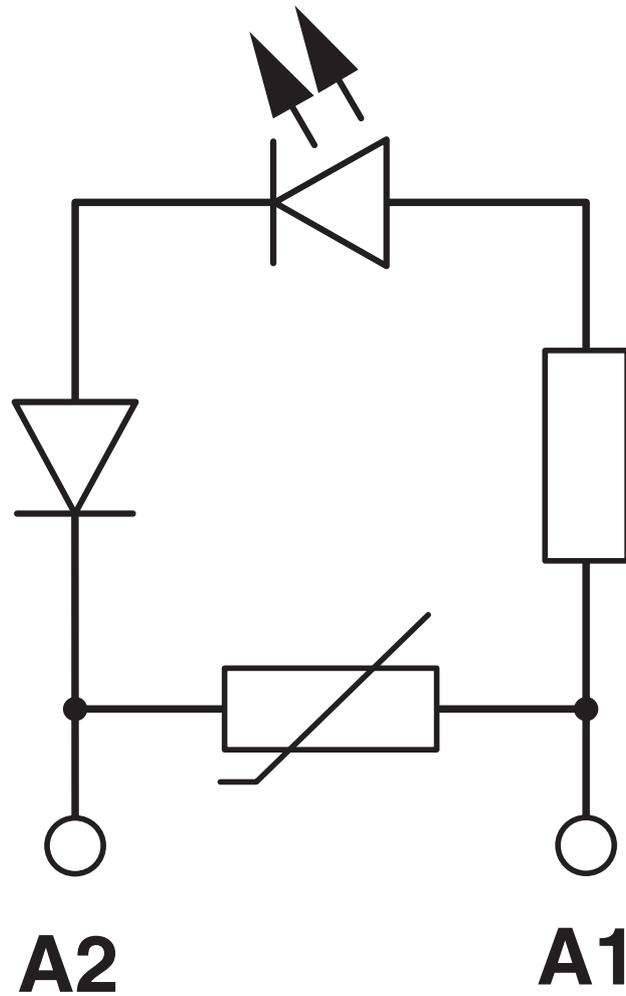
Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2833712

cUL Recognized
Approval ID: E140324

UL Recognized
Approval ID: E140324

EAC
Approval ID: RU C-DE.A*30.B.01742

Classifications

ECLASS

ECLASS-13.0	27371692
ECLASS-15.0	27371692

ETIM

ETIM 9.0	EC002586

UNSPSC

UNSPSC 21.0	39122300

LV- 12- 24UC - Plug-in module

2833712

https://www.phoenixcontact.com/us/products/2833712

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com