




PUIaudio




Data Sheet	AB2746B
------------	---------


Specifications

Parameters	Values	Units
Resonant Frequency	4,600±500	Hz
Resonant Impedance (Max)	250	Ohms
Max Input Voltage	20	Vp-p
Capacitance (@ 1,000 Hz)	16,000±30%	pF
Plate Material	Brass	-
Storage Temperature	-30 ~ +80	°C
Operating Temperature	-20 ~ +70	°C
Environmental Compliances	RoHS/REACH	Exempt. 7c-1

Dimensions

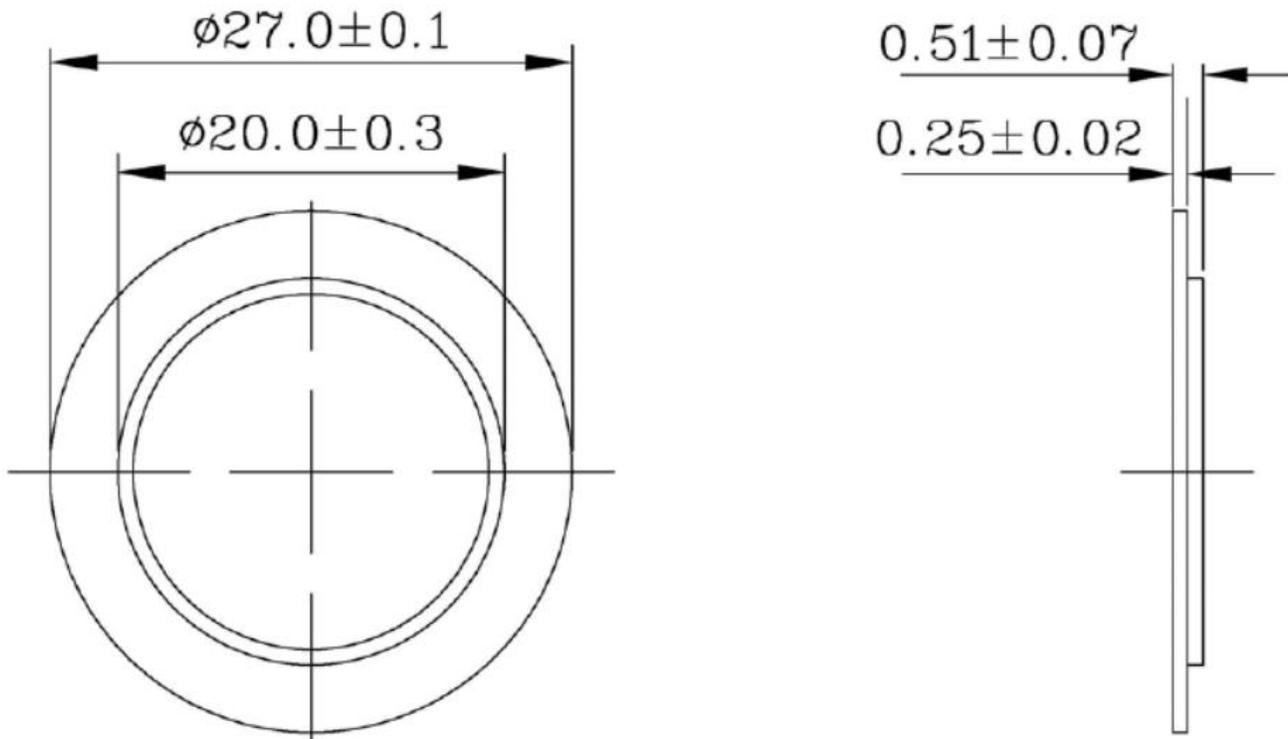

Packaging

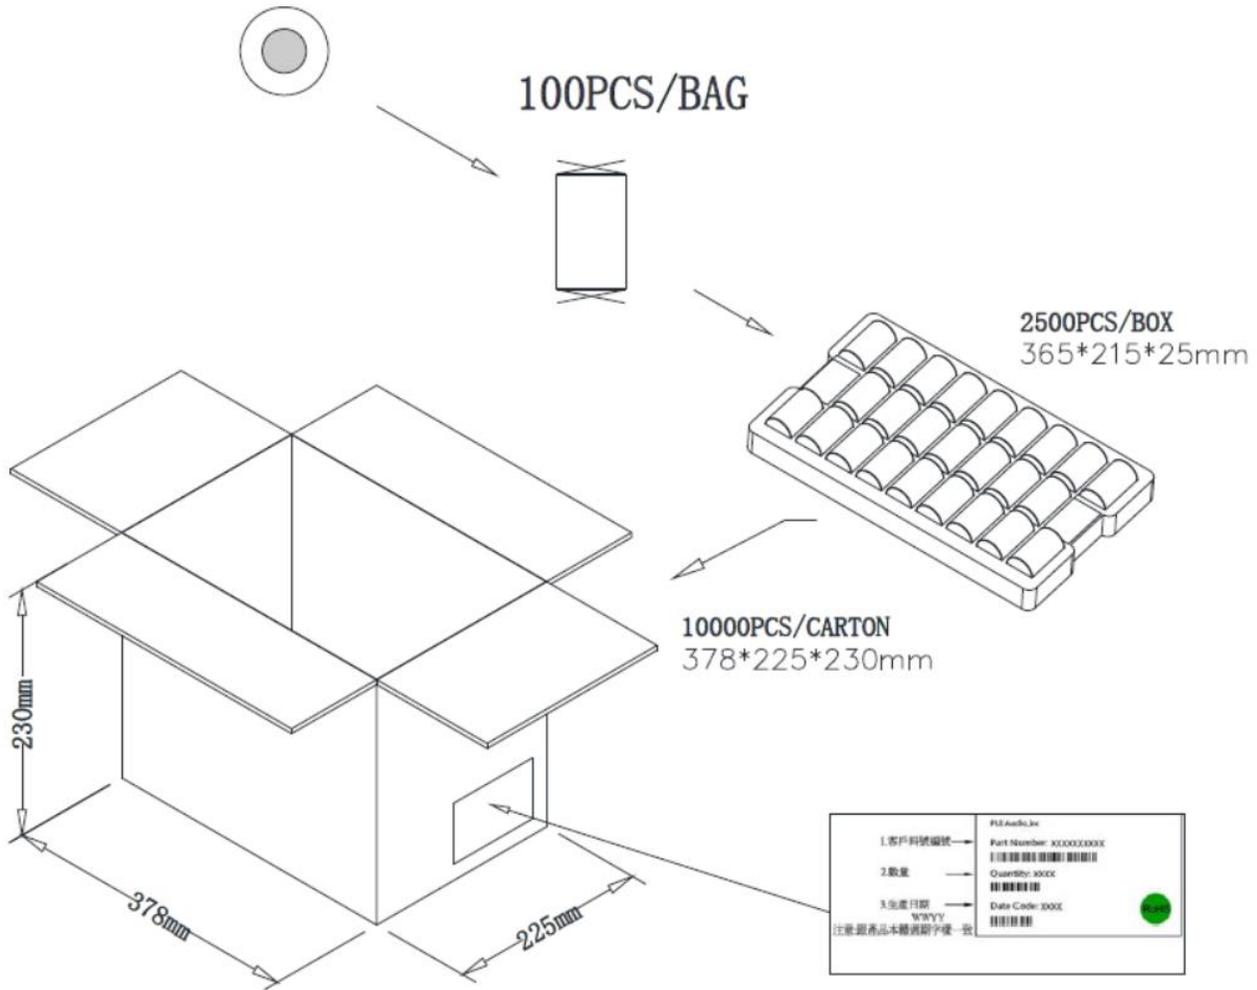

Specifications Revisions

Revision	Description	Date	Approved
-	RELEASED FROM ENGINEERING	04/11/2002	-
A	REVISED TO NEW TEMPLATE	09/04/2003	RW
B	REVISED SPECIFICATIONS	01/13/2004	RW
C	REVISED TO 3D DRAWING TEMPLATE	08/13/2010	BR
D	Update Spec Format, Change Packaging Details, Revised Piezo Thickness	02/24/2025	ML

Note:

- Unless otherwise specified:
 - All dimensions are in millimeters.
 - Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$.
- Specifications subject to change or withdrawal without notice.