




PUI audio



Data Sheet

AB4122B



Features:

- Ultrathin and lightweight 41mm bender
- 2,200 Hz resonant frequency
- Low power consumption

Specifications

| Parameters | Values | Units |
|---------------------------|--------------|--------------|
| Resonant Frequency | 2,200 ± 300 | Hz |
| Resonant Impedance (Max) | 250 | Ohms |
| Max Input Voltage | 30 | Vp-p |
| Capacitance (@ 120 Hz) | 30,000 ± 30% | pF |
| Plate Material | Brass | - |
| Storage Temperature | -30 ~ 80 | °C |
| Operating Temperature | -20 ~ 70 | °C |
| Environmental Compliances | RoHS/REACH | Exempt. 7c-1 |

Dimensions

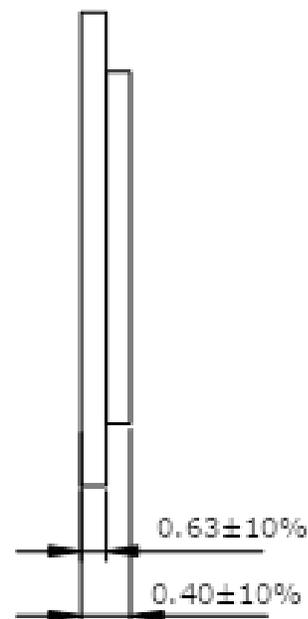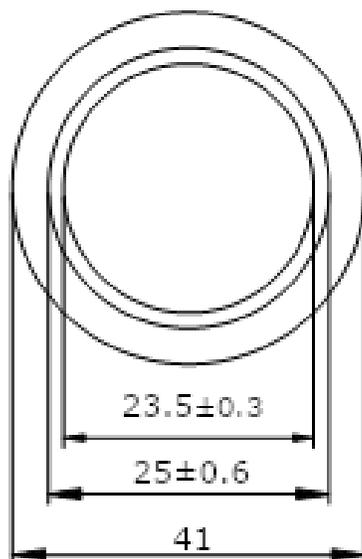

Packaging

50pcs/roll, foam packaging
10 rolls/layer = 500pcs
total 5 layers = 2,500pcs

Specifications Revisions

| Revision | Description | Date | Approved |
|----------|---------------------------|--------|----------|
| A | Released from Engineering | 3/6/24 | JD |
| B | Updated Packaging | 3/7/25 | JD |

Note:

- Unless otherwise specified:
 - All dimensions are in millimeters.
 - Default tolerances are $\pm 0.5\text{mm}$ and angles are $\pm 3^\circ$.
- Specifications subject to change or withdrawal without notice.