


- Coated Paper Cone
- Ferrite Magnet
- Pressed Steel Basket
- Rubber Surround
- Optimized for Sealed Enclosures

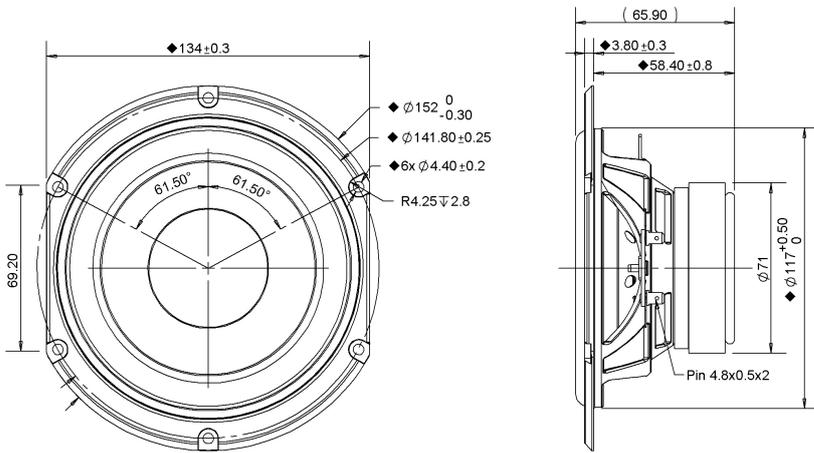


### SPECIFICATIONS

Transducer Size	5.25	in
Impedance	8	Ω
Frequency Range <sup>1</sup>	50 - 5000	Hz
Sensitivity <sup>2</sup> (2.83V   1W @ 1m)	86.1   86.1	dB
Power Rating (IEC 268-5)	60	W
Voice Coil Size	25.8	mm
Air Gap   Winding Height	H <sub>ag</sub>   H <sub>vc</sub>	6   12.9 mm
Net Weight	0.68	kg

### PARAMETERS <sup>3</sup>

Eff. Piston Area	S <sub>d</sub>	86.6	cm <sup>2</sup>
DC Resistance	R <sub>e</sub>	5.9	Ω
Minimum Impedance	Z <sub>min</sub>	6.5	Ω
Inductance	L <sub>e</sub>	0.493	mH
Resonance Frequency <sup>4</sup>	F <sub>s</sub>	65	Hz
Mechanical Q Factor	Q <sub>ms</sub>	3.47	-
Electrical Q Factor	Q <sub>es</sub>	0.76	-
Total Q Factor	Q <sub>ts</sub>	0.62	-
Moving Mass	M <sub>ms</sub>	9.67	g
Compliance	C <sub>ms</sub>	620	μm/N
Equivalent Volume	V <sub>as</sub>	6.58	L
Motor Force Factor	Bl	5.53	Tm
Motor Efficiency	β	5.2	(Bl) <sup>2</sup> / R <sub>e</sub>
Linear Excursion <sup>5</sup>	X <sub>max</sub>	5.46	mm
Max Mechanical Excursion <sup>6</sup>	X <sub>mech</sub>	10	mm

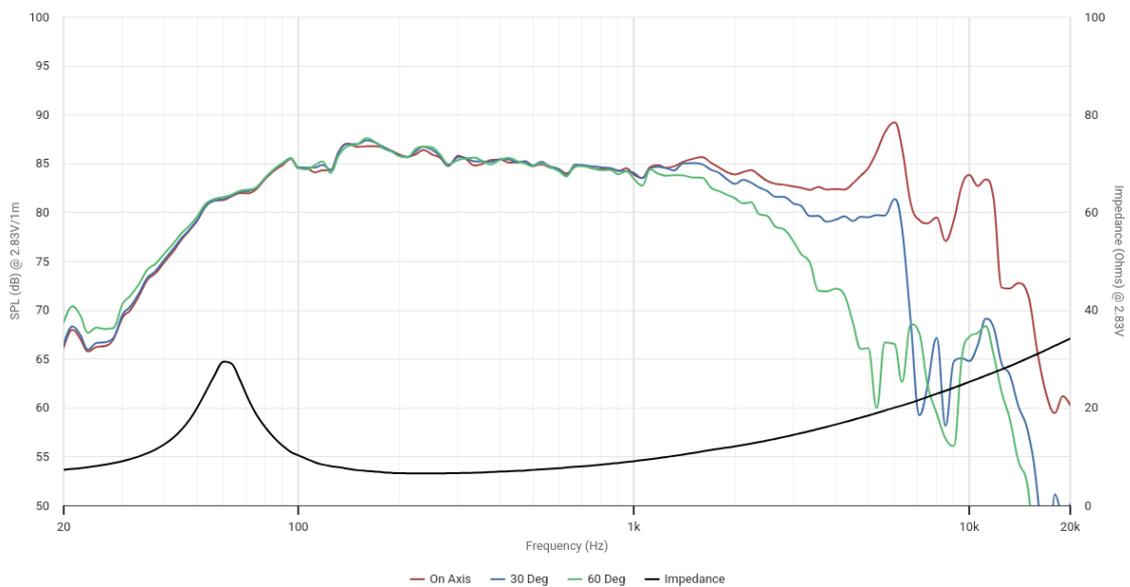

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. <sup>1</sup> Specified by Engineering as linear working range of transducer. <sup>2</sup> Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. <sup>3</sup> Measured in Free Air without preconditioning, therefore subject to some deviation. <sup>4</sup> Impedance and F<sub>s</sub> value measured under different conditions. <sup>5</sup> Equal/Overhung: (H<sub>vc</sub> - H<sub>ag</sub>)/2 + H<sub>ag</sub>/3. Underhung: (H<sub>ag</sub> - H<sub>vc</sub>)/2 + H<sub>vc</sub>/3. <sup>6</sup> Mechanically limited excursion (e.g. bottoming, spider crash).