


● Cast Aluminum Frame

● Extra-Long Stroke Rubber Surround

● Paper Diaphragm

● Optimized Motor Linearity

● Dual Voice Coil 6Ω + 6Ω

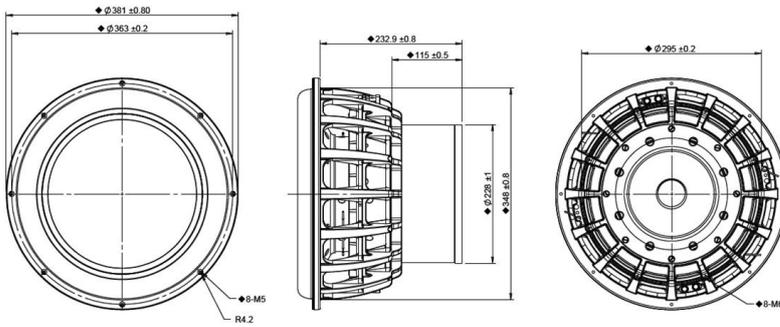


### SPECIFICATIONS

Transducer Size	15	in	
Impedance	12	Ω	
Frequency Range <sup>1</sup>	20 - 200	Hz	
Sensitivity <sup>2</sup> (2.83V   1W @ 1m)	79.2   76.2	dB	
Power Rating (IEC 268-5)	2500	W	
Voice Coil Size	188	mm	
Air Gap   Winding Height	H <sub>ag</sub>   H <sub>vc</sub>	36   56.8	mm
Net Weight	26.3	kg	

### PARAMETERS <sup>3</sup>

Eff. Piston Area	S <sub>d</sub>	775	cm <sup>2</sup>
DC Resistance	R <sub>e</sub>	12	Ω
Minimum Impedance	Z <sub>min</sub>	18	Ω
Inductance	L <sub>e</sub>	9.19	mH
Resonance Frequency <sup>4</sup>	F <sub>s</sub>	21	Hz
Mechanical Q Factor	Q <sub>ms</sub>	14.6	-
Electrical Q Factor	Q <sub>es</sub>	0.47	-
Total Q Factor	Q <sub>ts</sub>	0.46	-
Moving Mass	M <sub>ms</sub>	561	g
Compliance	C <sub>ms</sub>	110	μm/N
Equivalent Volume	V <sub>as</sub>	90.3	L
Motor Force Factor	Bl	43.3	Tm
Motor Efficiency	β	155	(Bl) <sup>2</sup> / R <sub>e</sub>
Linear Excursion <sup>5</sup>	X <sub>max</sub>	22.4	mm
Max Mechanical Excursion <sup>6</sup>	X <sub>mech</sub>	37.2	mm

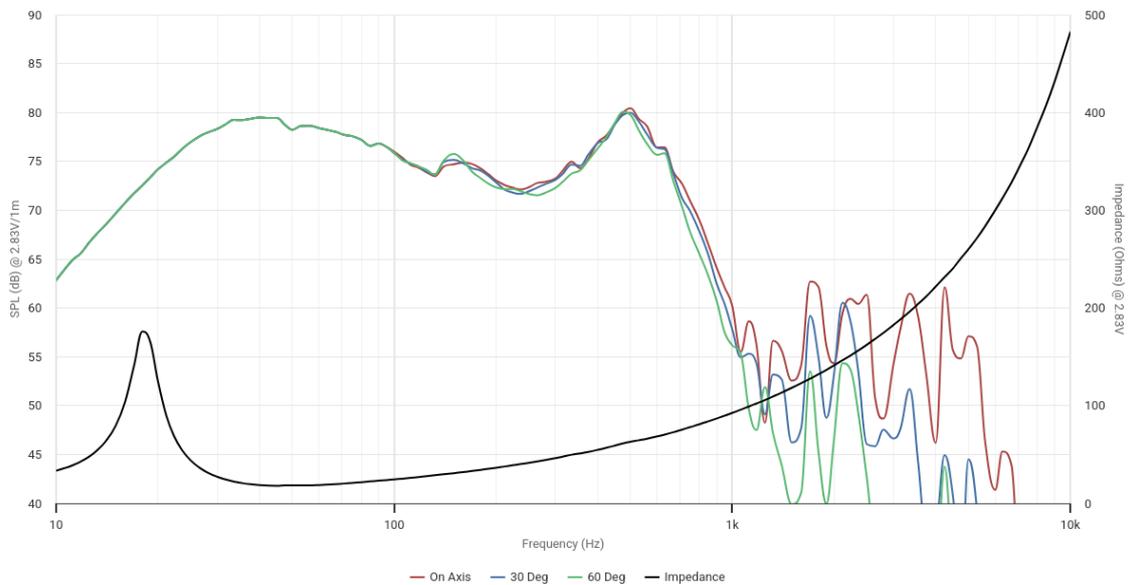

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. <sup>1</sup> Specified by Engineering as linear working range of transducer. <sup>2</sup> Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. <sup>3</sup> Measured in Free Air without preconditioning, therefore subject to some deviation. <sup>4</sup> Impedance and F<sub>s</sub> value measured under different conditions. <sup>5</sup> Equal/Overhung: (H<sub>vc</sub> - H<sub>ag</sub>)/2 + H<sub>ag</sub>/3. Underhung: (H<sub>ag</sub> - H<sub>vc</sub>)/2 + H<sub>vc</sub>/3. <sup>6</sup> Mechanically limited excursion (e.g. bottoming, spider crash).