

## SMD PTC Thermistors, Inrush Current Limiter



### LINKS TO ADDITIONAL RESOURCES



| QUICK REFERENCE DATA                                                  |             |           |
|-----------------------------------------------------------------------|-------------|-----------|
| PARAMETER <sup>(1)</sup>                                              | VALUE       | UNIT      |
| Resistance at 25 °C ( $R_{25}$ ) <sup>(2)</sup>                       | 60 to 1000  | $\Omega$  |
| Switching temperature                                                 | 135, 165    | °C        |
| Maximum inrush current                                                | 10 to 40    | A         |
| Maximum AC voltage <sup>(2)</sup>                                     | 350 to 800  | $V_{RMS}$ |
| Maximum DC voltage <sup>(2)</sup>                                     | 500 to 1200 | $V_{DC}$  |
| Maximum peak voltage <sup>(3)</sup>                                   | 4000        | $V_P$     |
| Minimum dielectric withstanding voltage between terminals and housing | 3000        | $V_{AC}$  |
| Maximum energy at 25 °C <sup>(1)</sup>                                | 240, 340    | J         |
| Operating temperature range                                           | -40 to 105  | °C        |
| Storage temperature range                                             | -40 to 175  | °C        |
| Dissipation factor                                                    | 16          | mW/K      |
| Thermal time constant (still air cooling)                             | 260         | s         |
| Weight                                                                | 8.5         | g         |

#### Notes

- <sup>(1)</sup> Definitions, measurements, and tests are made in accordance with standard IEC 60738-1 "Thermistors - Directly heated positive temperature coefficient" and AEC-Q200 stress test qualification for passive components
- <sup>(2)</sup> Other resistance values and maximum operating voltages available on request.  
Matched resistance values available on request
- <sup>(3)</sup> Maximum peak voltages are based on 8/20  $\mu$ s pulses that can be applied with limited none-switching energy

### FEATURES

- Standard 240 J and high energy 340 J available
- High number of inrush-power cycles:  
> 100 000 cycles
- Suitable for reflow soldering
- Can handle high direct voltage up to 1200 V
- Highly resistant against shock and vibration
- Insulated housing up to 3 kV<sub>AC</sub>
- Self protecting in case of overload with no risk of over-heating
- AEC-Q200 qualified
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
**HALOGEN**  
**FREE**

### APPLICATIONS

Inrush current limiting and energy-dump resistor in:

- AC/DC and DC/DC converters
- Energy dump and DC-Link circuits
- Emergency discharge circuits
- OBC, battery charging equipment
- Motor drives

PTCES thermistors have resistance values that can change instantly based on the applied voltage levels and varying body temperatures.

### DESCRIPTION

These directly heated ceramic-based doped barium titanate thermistors have a positive temperature coefficient and are primarily intended for inrush current limiting and overload protection. They consist of a solder connected homogeneous ceramic PTC encapsulated in a UL 94 V-0 approved PPS-GF housing. The part is laser marked with the Vishay logo, R25 value, date code YYWW, and ES for PTCE17, or HES for PTCE67.

### MOUNTING

Important mounting and handling instructions, see:

[www.vishay.com/doc?xxxxx](http://www.vishay.com/doc?xxxxx)

By reflow soldering in any position.

Not intended for potting or sealing.

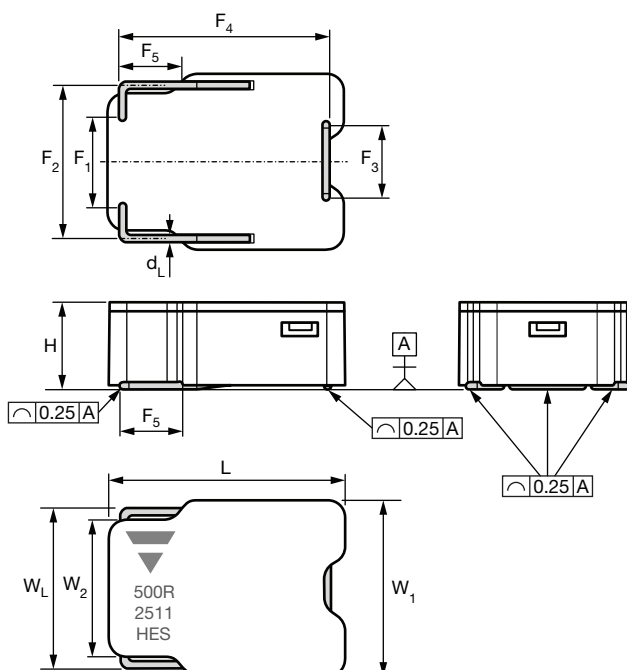
Maximum surface temperature in case of overload can reach 180 °C.

### PACKAGING

PTCES thermistors are available in tape on reel 350 pieces.

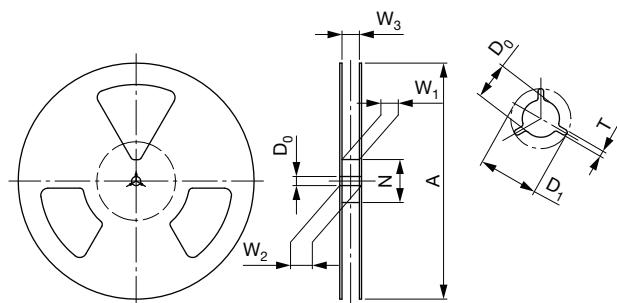
**ELECTRICAL DATA AND ORDERING INFORMATION**

| PART NUMBER    | $R_{25}$<br>( $\Omega$ ) | $R_{25}$ TOL.<br>(%) | $V_{MAX.}$<br>( $V_{RMS}$ ) | $V_{LINK MAX.}$<br>( $V_{DC}$ ) | $R_{MIN.}$<br>< 1.5 $V_{DC}$<br>( $\Omega$ ) | $I_{HOLD}$<br>AT 25 °C<br>(mA) | $C_{th}$<br>(J/K) | $E_{MAX.}$<br>1 CYCLE<br>AT 25 °C<br>(J) | $\tau_{th}$<br>(s) | WEIGHT<br>(g) |
|----------------|--------------------------|----------------------|-----------------------------|---------------------------------|----------------------------------------------|--------------------------------|-------------------|------------------------------------------|--------------------|---------------|
| PTCES17R600MTE | 60                       | 30                   | 440                         | 625                             | 32                                           | 125                            | 2.4               | 240                                      | 260                | 8.2           |
| PTCES17R121NTE | 120                      | 30                   | 460                         | 650                             | 64                                           | 90                             | 2.4               | 240                                      | 260                | 8.2           |
| PTCES17R251STE | 250                      | 30                   | 600                         | 850                             | 130                                          | 63                             | 2.4               | 240                                      | 260                | 8.2           |
| PTCES17R501TTE | 500                      | 30                   | 700                         | 1000                            | 260                                          | 45                             | 2.4               | 230                                      | 260                | 8.2           |
| PTCES17R102UTE | 1000                     | 30                   | 800                         | 1200                            | 500                                          | 32                             | 2.4               | 230                                      | 260                | 8.2           |
| PTCES67R151NTE | 150                      | 30                   | 460                         | 650                             | 65                                           | 92                             | 2.6               | 340                                      | 260                | 8.2           |
| PTCES67R251STE | 250                      | 30                   | 600                         | 850                             | 105                                          | 71                             | 2.6               | 340                                      | 260                | 8.2           |
| PTCES67R501TTE | 500                      | 30                   | 700                         | 1000                            | 200                                          | 50                             | 2.6               | 340                                      | 260                | 8.2           |

**OUTLINE AND DIMENSIONS**

**COMPONENT DIMENSIONS** in millimeters

| SYMBOL         | PTCES          |
|----------------|----------------|
| L              | 26.2 ± 0.3     |
| W <sub>1</sub> | 19.5 ± 0.3     |
| W <sub>2</sub> | 15.1 ± 0.3     |
| W <sub>L</sub> | 17.8 ± 0.35    |
| H              | 9.6 ± 0.3      |
| d <sub>L</sub> | 0.8 ± 0.05 (Ø) |
| F <sub>1</sub> | 10.0 ± 0.2     |
| F <sub>2</sub> | 17.0 ± 0.3     |
| F <sub>3</sub> | 8.0 ± 0.2      |
| F <sub>4</sub> | 23.3 ± 0.4     |
| F <sub>5</sub> | 7.0 ± 0.3      |





Dimension according to IEC EN 60286-3

| REEL DIMENSIONS in millimeters |                              |           |
|--------------------------------|------------------------------|-----------|
| SYMBOL                         | PARAMETER                    | VALUE     |
| D <sub>0</sub>                 | Reel hole inner diameter     | 12.8 min. |
| D <sub>1</sub>                 | Reel hole outer diameter     | 21.1 min. |
| T                              | Notch width                  | 2.0 min.  |
| N                              | Hub diameter                 | 100       |
| A                              | Reel diameter                | 380       |
| W <sub>1</sub>                 | Reel inner width (at hub)    | 44.4 min. |
| W <sub>2</sub>                 | Reel outer width (at hub)    | 50.4 max. |
| W <sub>3</sub>                 | Reel inner width (at flange) | 50.4 max. |

### REQUIRED NUMBER OF PTC THERMISTORS TO LIMIT CURRENT AND ABSORB ENERGY

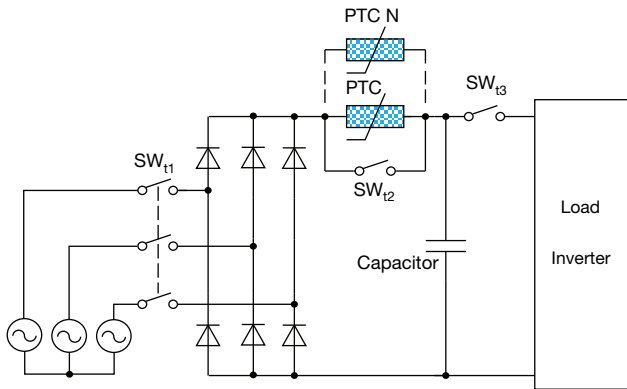
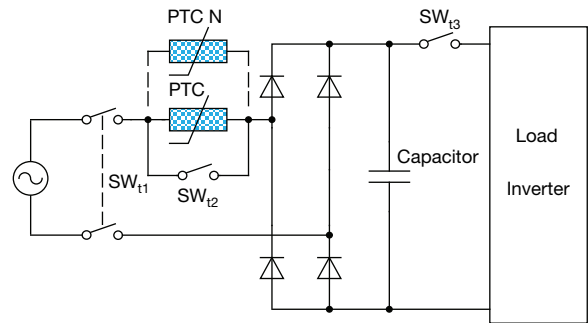
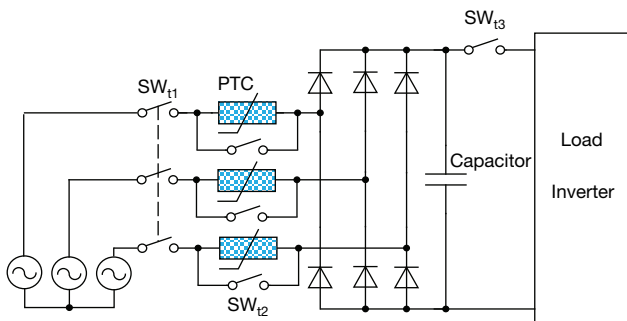
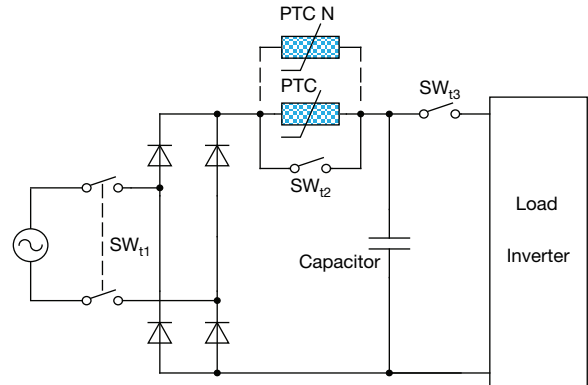
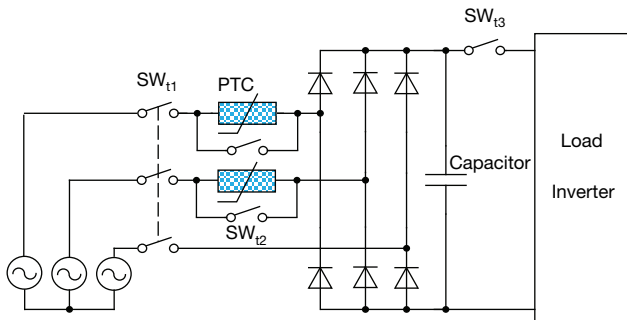
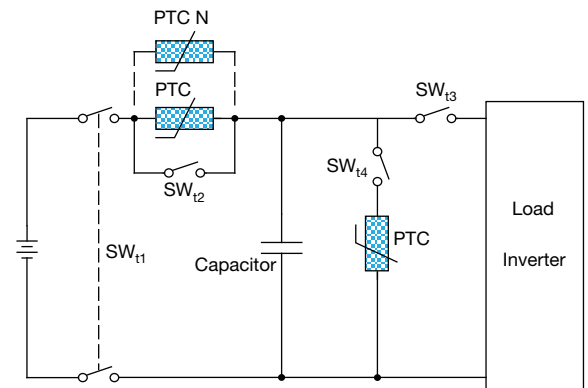
By using several PTC's in a series / parallel network, the maximum current limitation and absorbed energy levels can be further optimized. For homogeneous current and energy distribution it is recommended to combine only PTCES of the same nominal resistance value. Energy absorption per PTC in a network depends on current distribution in the network and as such on the individual PTC resistance value. PTCES thermistors might be used in a series connection to further lower the inrush current, but not to increase the maximum allowed voltage levels. PTCES thermistors placed in series can have a reduced energy handling depending on their resistance values. Following formula may be used to calculate the minimum number of PTCES thermistors of the same resistance value that are required in a DC link or other capacitor bank application to properly charge or discharge a given amount of non-repetitive energy without follow current. The formula is valid for one charge or discharge operation within cool down period of at least 5 times the thermal time constant and for which the T<sub>PTC</sub> equals the T<sub>amb</sub> before a consecutive operation. To make a better evaluation of which PTCES type and how many parts would be needed for a specific circuit and operating mode, it is advisable to use the available SPICE models and simulate the circuit application.

$$N \geq \frac{K \times C \times V^2}{2 \times C_{th} \times (T_{sw} - T_{amb})}$$

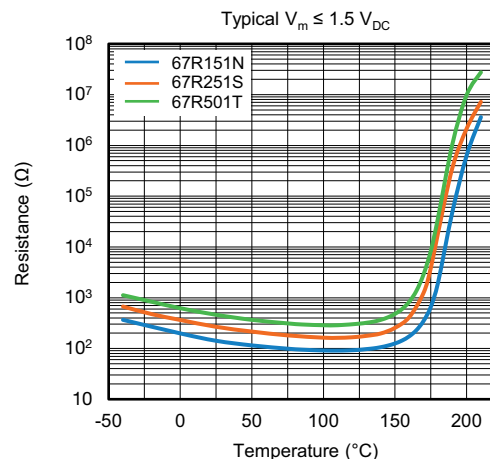
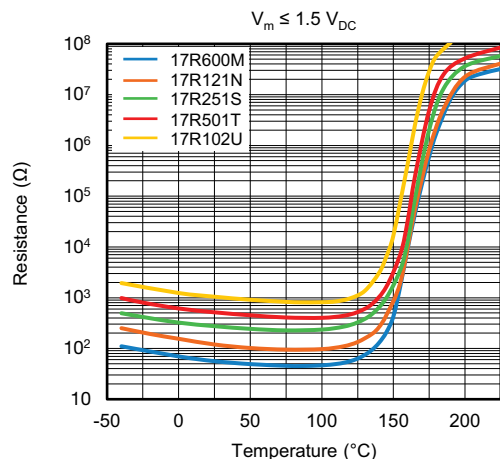
#### Notes

- N is the number of PTCES required in the network
- C is the total capacitor value to charge or discharge in [F]
- V is the maximum DC voltage on the capacitor C
- C<sub>th</sub> is the thermal capacity of one PTC in [J/K] (see table)
- T<sub>sw</sub> is the minimum switching temperature of the PTCES type (130 °C for PTCES17, 160 °C for PTCES67)
- T<sub>amb</sub> is the maximum ambient temperature at which the PTC needs to operate
- K is the factor that determines the charging operation mode
  - K = 1 for DC ICL charging or discharging
  - K = 0.94 for 3-phase ICL charging
  - K = 0.84 for 2 out of 3-phase ICL charging
  - K = 0.76 for single phase ICL charging

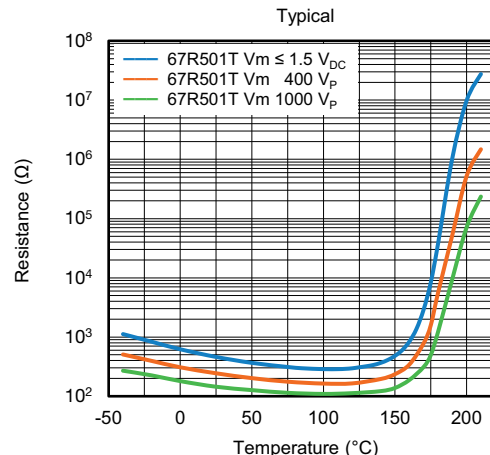
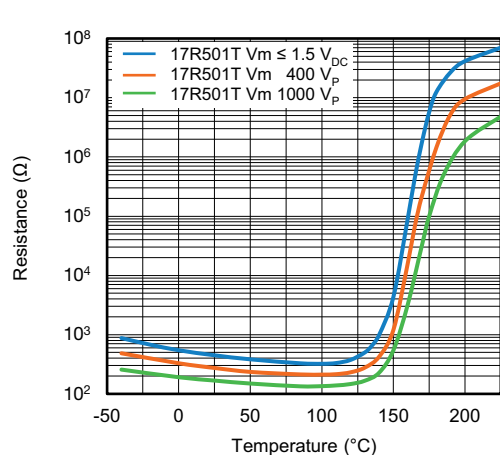
The different charging operating modes are expressed in the circuit drawings on page 5.

**DIFFERENT ICL CIRCUITS USING PTCES(L) AT DIFFERENT POSSIBLE POSITIONS**
**3 Phase - PTC(s) After Bridge ( $K = 0.94$ )**

**1 Phase - PTC(s) Before Bridge ( $K = 0.76$ )**

**3 Phase - PTC(s) Before Bridge 3 Phases ( $K = 0.94$ )**

**1 Phase - PTC(s) After Bridge ( $K = 0.76$ )**

**3 Phase - PTC(s) Before Bridge 2 Phases ( $K = 0.84$ )**

**DC - PTC Charge And / Or Discharge ( $K = 1.00$ )**


## RESISTANCE VS. TEMPERATURE

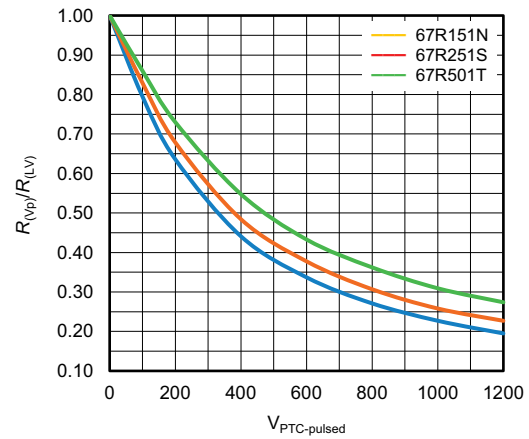
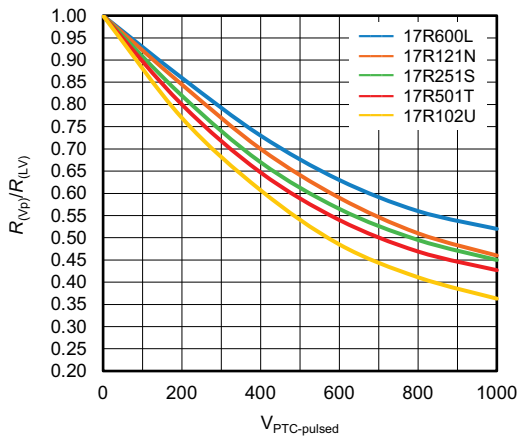
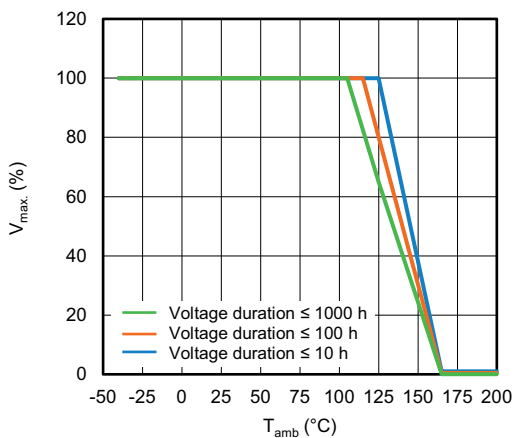
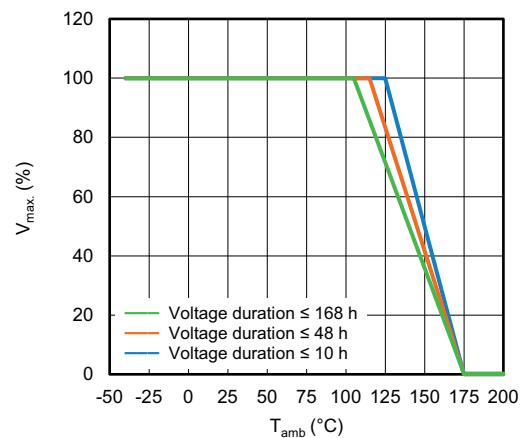
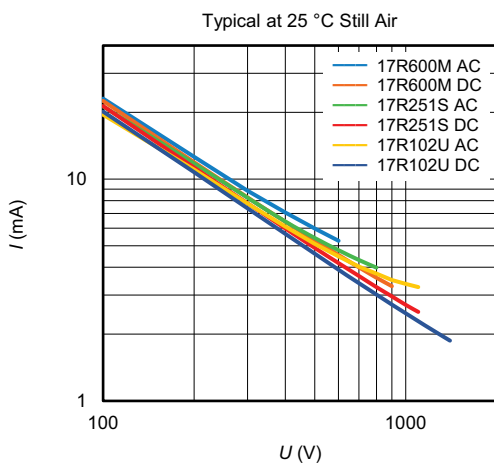
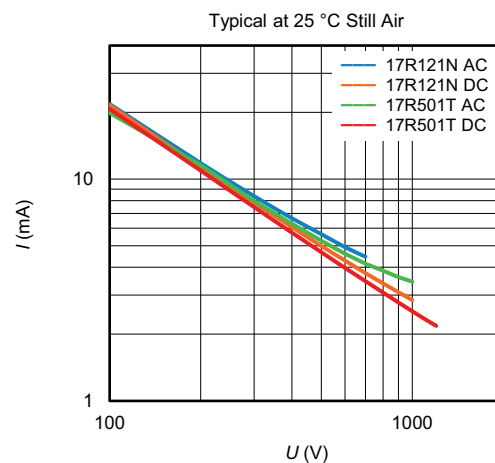


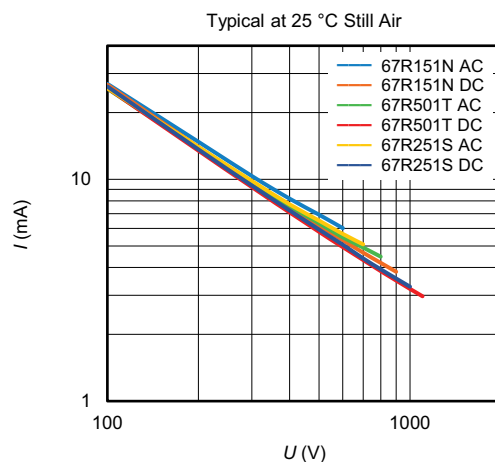
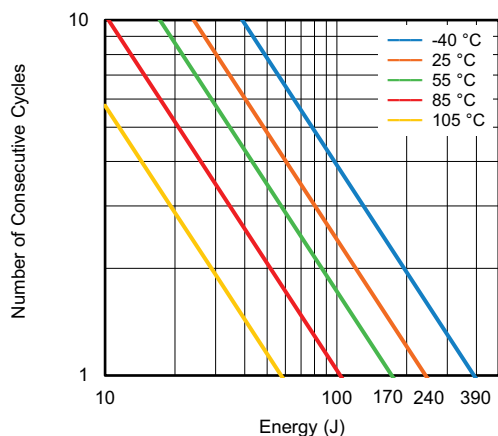
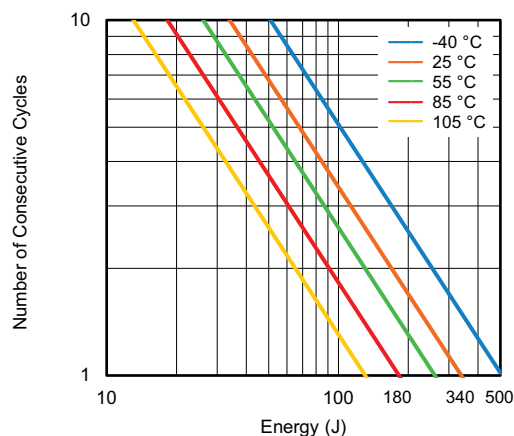
## RESISTANCE VS. TEMPERATURE PULSED



### Notes

- The minimum PTC resistance values under (pulsed) voltage are depending on actual minimum resistance value in the temperature range of 80 °C to 120 °C. The actual voltage dependency effect or  $R_{VP}/R_{LV}$  ratio (see page 6) of ceramic PTC is depending on its resistance values at low voltage ( $R_{LV}$ ) and the applied pulsed voltage. The different curves (on top of page 6) represent the influence of (pulsed) voltage related to some typical PTC resistance values at any temperature below 150 °C. A PTC resistance value  $R_{LV}$  can be taken from the Resistance vs. Temperature graphs and multiplied by a corresponding ratio to estimate the (minimum) resistance value and determine a maximum peak current at a defined voltage. Actual peak currents that could be reached at certain voltage levels can be more precisely evaluated by using the available SPICE models
- The graphs "Resistance vs. temperature pulsed" on a PTCES17R501T and a PTCES67R501T above, are examples of pulsed voltage RT curves, where the voltage is applied in short pulses with low energy (< 1 J) to prevent self heating of the PTC ceramic pellet

**PTC RESISTANCE UNDER PULSED VOLTAGE**

**V<sub>max</sub>. DERATING VS. T<sub>amb</sub> FOR PTCS17**

**V<sub>max</sub>. DERATING VS. T<sub>amb</sub> FOR PTCS67**

**RESIDUAL CURRENT VS. VOLTAGE FOR PTCS17 V<sub>AC</sub> / V<sub>DC</sub>**

**RESIDUAL CURRENT VS. VOLTAGE FOR PTCS67 V<sub>AC</sub> / V<sub>DC</sub>**


**RESIDUAL CURRENT VS. VOLTAGE FOR PTCE567  $V_{AC}$  /  $V_{DC}$** 

**CONSECUTIVE ENERGY CYCLES AT DIFFERENT  $T_{amb}$  FOR PTCE517**

**CONSECUTIVE ENERGY CYCLES AT DIFFERENT  $T_{amb}$  FOR PTCE567**




## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.