
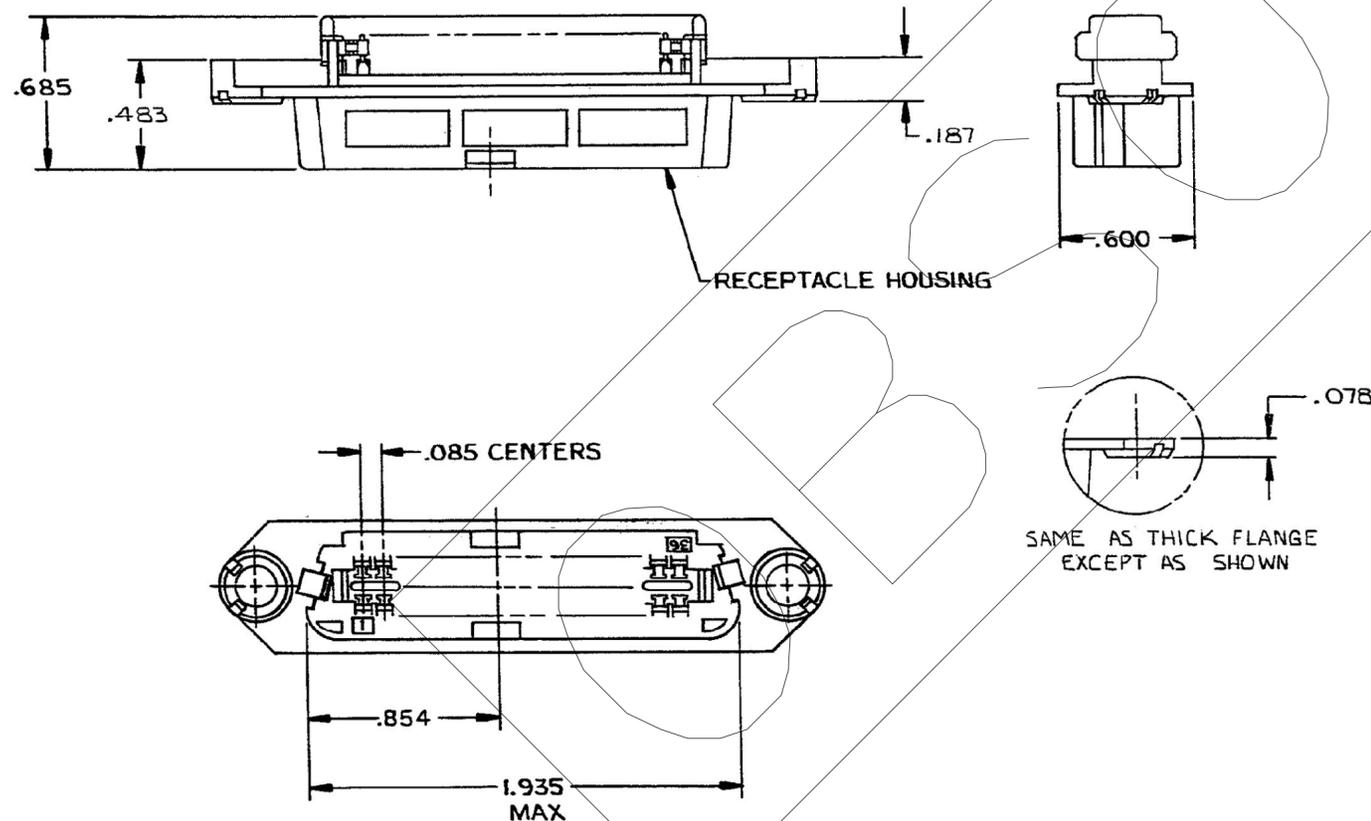


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	K1	REVISED PER ECN-25-304261	03FEB2025	TR SKN

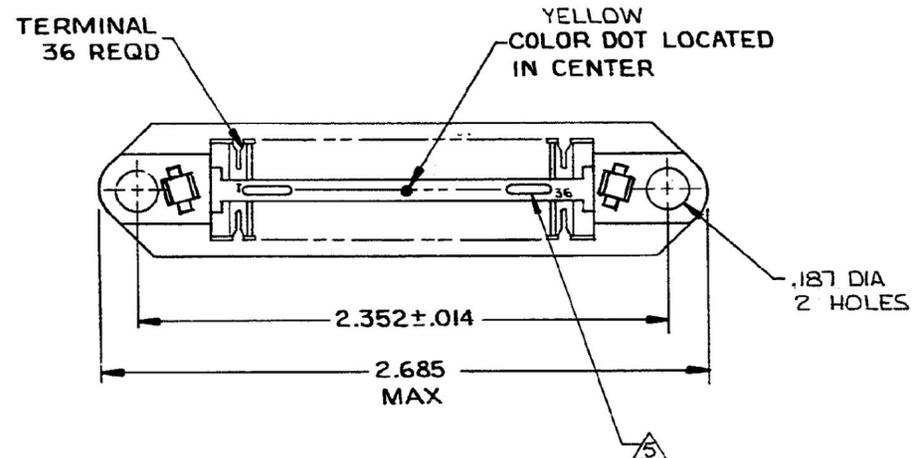

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
2. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
3. MATERIAL:
HOUSING - THERMOPLASTIC (BLACK)
TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL, ON CONTACT MATING SURFACE .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
4. WIRE SIZE: 26, 27, OR 28 AWG, 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION ϕ .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
5. CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

OBSOLETE	THIN FLANGE	2-552475-1
	DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12-27-79 STEPHEN DOSS	TE Connectivity	
DIMENSIONS: INCHES		CHK 12-31-79 M.D. FRIEL	RECEPTACLE ASSY, 36 POSITION, E SLOT W/ ϕ .187 HOLES, CHAMP-LOK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 1-2-80 S. HEGE	NAME	RESTRICTED TO
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	SIZE	CAGE CODE
2 PLC ± -	3 PLC ± -	APPLICATION SPEC	A2	00779
4 PLC ± -	ANGLES ± -	WEIGHT	DRAWING NO	G=552475
MATERIAL	FINISH	CUSTOMER DRAWING	SCALE	NTS
			SHEET	1 OF 1
			REV	K1

552475