

1586359-4 ✓ ACTIVE

MATE-N-LOK | Mini-Universal MATE-N-LOK


TE Internal #: 1586359-4

Gang Wire Seal, -40 – 90 °C [-40 – 194 °F], Blue, Silicone Rubber,  
1.27 – 2.11 mm [.05 – .083 in] Insulation Diameter, Mini-Universal  
MATE-N-LOK

[View on TE.com >](#)



Connectors > Connector Accessories > Connector Seals & Cavity Plugs

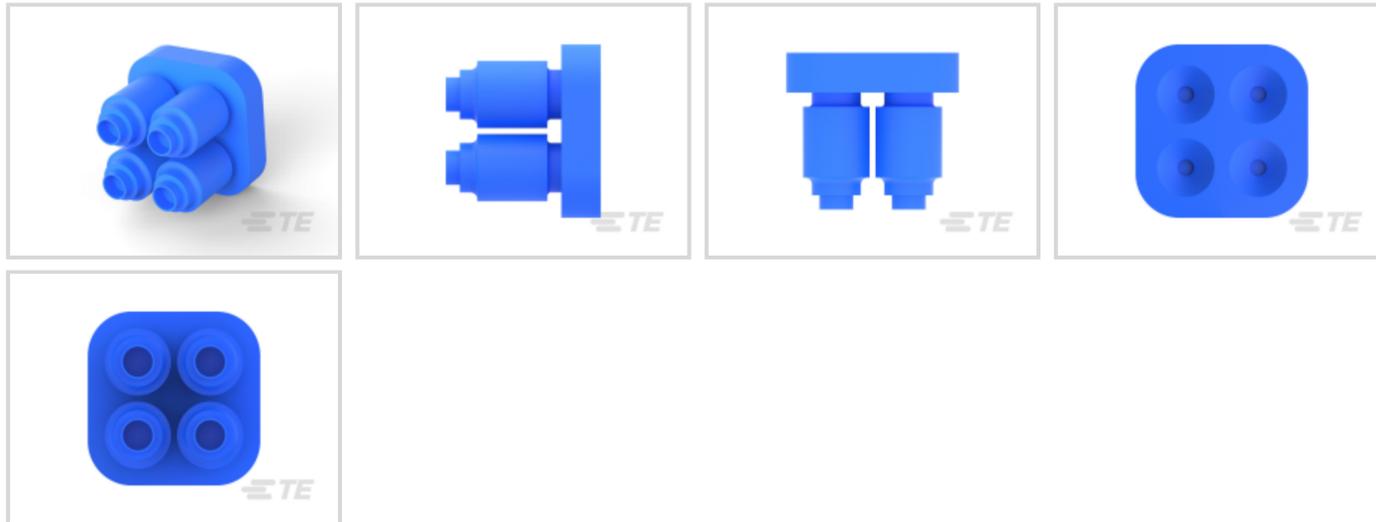

Connector Seal & Plug Type: **Gang Wire Seal**

Operating Temperature Range: **-40 – 90 °C [-40 – 194 °F]**

Primary Product Color: **Blue**

Primary Product Material: **Silicone Rubber**

Compatible Insulation Diameter Range: **1.27 – 2.11 mm [.05 – .083 in]**

## Features

### Product Type Features

Connector Seal & Plug Type	Gang Wire Seal
----------------------------	----------------

### Body Features

Primary Product Color	Blue
Primary Product Material	Silicone Rubber

### Dimensions

Wire Size	18 – 26 AWG
Compatible Insulation Diameter Range	1.27 – 2.11 mm [.05 – .083 in]

### Usage Conditions

Operating Temperature Range	-40 – 90 °C[-40 – 194 °F]
Operating Temperature (Max)	90 °C[194 °F]

### Packaging Features

Packaging Method	Bag
Packaging Quantity	1600



## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JUNE 2025 (250)                      Candidate List Declared Against: JUNE 2025 (250)                      SVHC &gt; Threshold:                      Octamethylcyclotetrasiloxane (D4) (.5% in 27619449430)                      Dodecamethylcyclohexasiloxane (D6) (.5% in M-13584-1)                      Decamethylcyclopentasiloxane (D5) (.5% in M-13584-1)</p> <p><b>Article Safe Usage Statements:</b>                      Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability







### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



### Also in the Series | Mini-Universal MATE-N-LOK

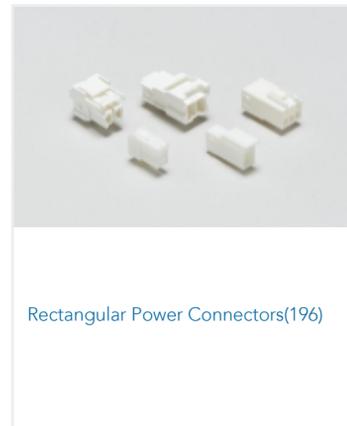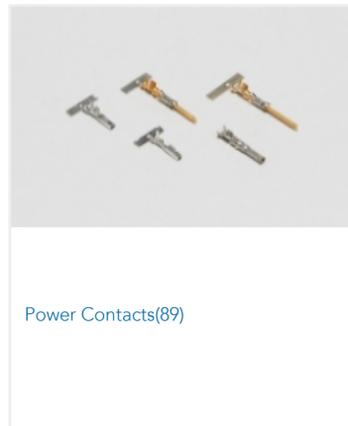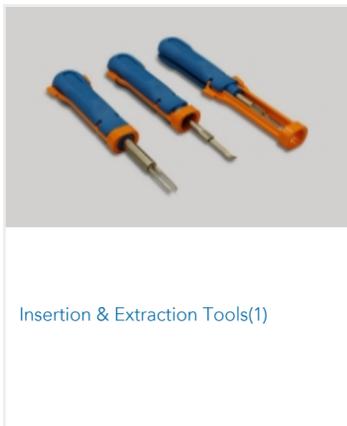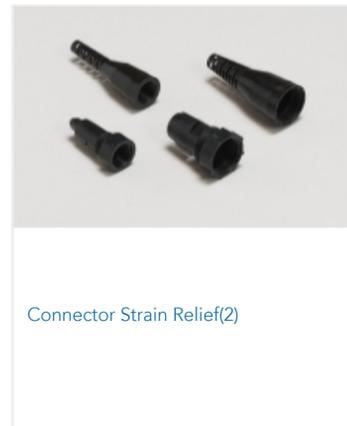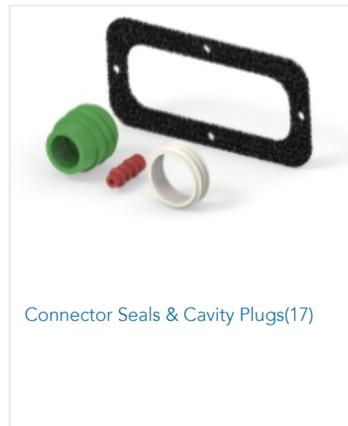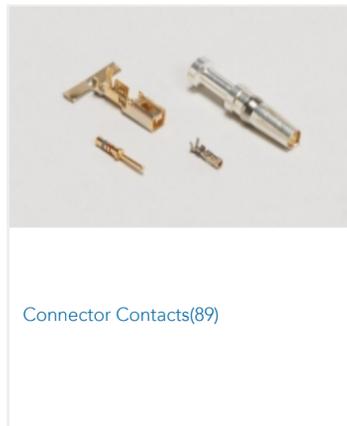

### Customers Also Bought





## Documents

### Product Drawings

#### 04P MINIMUMNL GANG WIRE SEAL DR

English

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1586359-4\\_D.2d\\_dxf.zip](#)

English

#### 3D PDF

3D

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1586359-4\\_D.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1586359-4\\_D.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### SOFT\_SHELL\_PIN\_AND\_SOCKET\_CONNECTORS\_CATALOG

English

### Product Specifications

#### Application Specification

English

### Instruction Sheets

#### Instruction Sheet (U.S.)

1586359-4

Gang Wire Seal, -40 – 90 °C [-40 – 194 °F], Blue, Silicone Rubber, 1.27 – 2.11 mm [.05 – .083 in] Insulation Diameter, Mini-Universal MATE-N-LOK



English