

3-640428-3 ✓ ACTIVE

MTA 156

TE Internal #: 3-640428-3

3 Position, Receptacle, Connector Assembly, Insulation


Displacement (IDC), Wire-to-Board, Tin (Sn), UL 94V-2, 3.96 mm [

156 in] Centerline, MTA 156

[View on TE.com >](#)



Connectors > Rectangular Connectors > Standard Rectangular Connectors

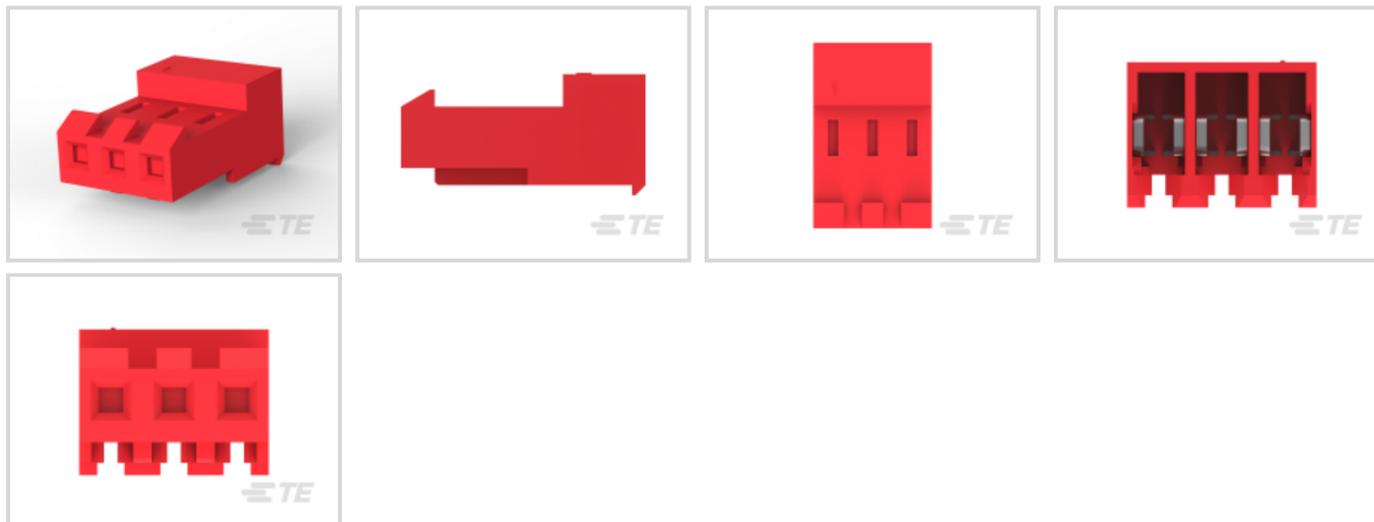

Connector Product Type: **Connector Assembly**

Mating Alignment: **Without**

Connector & Housing Type: **Receptacle**

Mating Retention Type: **Locking Ramp**

Connector System: **Wire-to-Board**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Connector Product Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	3
Number of Rows	1
Number of Power Positions	3

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	Red
-----------------------	-----



Cable Exit Angle	90°
------------------	-----

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	30 µm [.762 µin]
Contact Layout	Inline
Contact Base Material	Copper Alloy
Wire Contact Termination Area Plating Thickness	2.03 – 5.08 µm [80 – 200 µin]
Contact Mating Area Plating Material Finish	Matte
Contact Mating Area Plating Material	Tin (Sn)
Contact Retention Within Housing	With
Contact Current Rating (Max)	7 A
Contact Type	Receptacle
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.03 – 5.08 µm [80 – 200 µin]

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Strain Relief	With
Panel Mount Feature	Without
Contact Retention Type Within Housing	Locking Lance
Mating Alignment	Without
Mating Retention Type	Locking Ramp
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Wire & Cable IDC Installation Type	Closed End
Centerline (Pitch)	3.96 mm [.156 in]
Housing Material	Nylon

Dimensions

Compatible Insulation Diameter Range	2.41 mm [.095 in]
Connector Height	9.02 mm [.355 in]
Connector Length	11.89 mm [.468 in]



Wire Size	.325 mm ²
-----------	----------------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

UL Rating	Recognized
-----------	------------

Compatible With Approved Standards Products	UL E28476
---	-----------

CSA Rating	Certified, LR 7189
------------	--------------------

UL Flammability Rating	UL 94V-2
------------------------	----------

Glow Wire Rating	Standard Part - Not Glow Wire
------------------	-------------------------------

Packaging Features

Packaging Quantity	500
--------------------	-----

Packaging Method	Box & Carton
------------------	--------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
--	---

Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
-----------------	--

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 3-644617-3
03P MTA156 HDR ASY PO RA FB LF



TE Part # 3-644613-3
03P MTA156 HDR RA PO WO PEG LF



TE Part # 3-641522-3
03P MTA156 PSTD CONN ASSY ORNG



TE Part # 2-647125-3
03P MTA156 SHRD HDR ASSY LF



TE Part # 58074-1
MTA 50/100/156 MANUAL TOOL FRAME



TE Part # 643067-3
03P MTA156 MOLDED COVER



TE Part # 644751-3
03P MTA156 HDR ASSY R/A



TE Part # 640551-3
03P MTA156 COVER



TE Part # 640445-3
03P MTA156 HDR ASSY FL/STR SN



TE Part # 640383-3
03P MTA156 HDR ASSY STR SQ SN



TE Part # 641937-3
03P MTA156 HDR ASSY SQ W/O#1



TE Part # 640643-3
03P MTA156 COVER F/T



TE Part # 58247-3
MTA 156 CRIMP HEAD PRODUCTION RBBN CABLE



TE Part # 3-641438-3
03P MTA156 PSTD CONN ASSY WHT



TE Part # 641937-2
03P MTA156 HDR ASSY SQ W/O#3



TE Part # 644750-3
03P MTA156 HDR ASSY STR RND SN



TE Part # 644753-3
03P MTA156 HDR ASSY RN STR F/L



TE Part # 640388-3
03P MTA156 HDR ASSY RN STR F/L



TE Part # 644752-3
03P MTA156 HDR ASSY SQ STR F/L




TE Part # 58247-1
MTA 156 CRIMP HEAD REPAIR
DISCRETE

Also in the Series | MTA 156




Connector Caps & Covers(89)

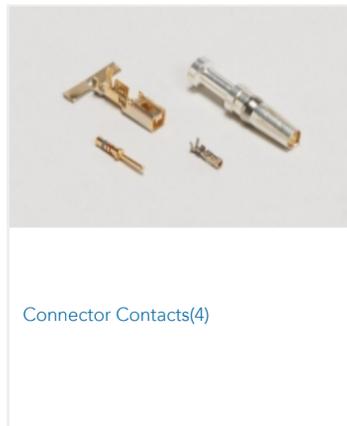

Connector Contacts(4)




Connector Hardware(2)

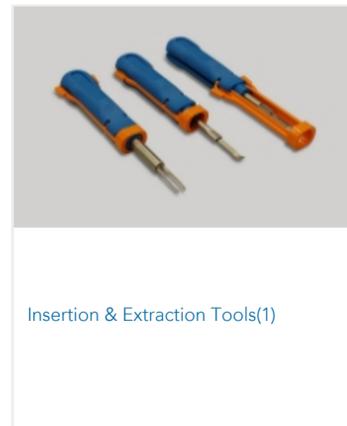

Insertion & Extraction Tools(1)



PCB Headers & Receptacles(677)

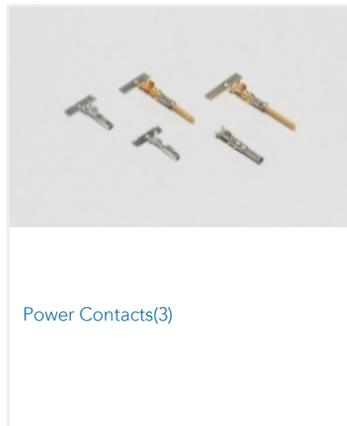

Power Contacts(3)



Rectangular Power Connectors(1178)



Wire-to-Board Headers & Receptacles
(677)

Customers Also Bought



TE Part #52263
TERMINAL R PG 8 10



TE Part #5-103944-2
5X3 MTE SHRD PIN SR POL .100



TE Part #3-520151-2
ULTRAFast 187 ASSY REC 16-14
TPBR LP



TE Part #3-640427-2
02P MTA156 CONN ASSY 20AWG YEL



TE Part #3-640427-3
03P MTA156 CONN ASSY 20AWG YEL




TE Part #3-640428-5
05P MTA156 CONN ASSY 22AWG RED



TE Part #3-640428-7
07P MTA156 CONN ASSY 22AWG RED



TE Part #3-640429-3
03P MTA156 CONN ASSY 24AWG
WHT



TE Part #640551-3
03P MTA156 COVER



TE Part #3-643817-4
04P MTA156 CONN ASSY 18AWG
ORA

Documents

Product Drawings

[03P MTA156 CONN ASSY 22AWG RED](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_3-640428-3_N.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-640428-3_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_3-640428-3_N.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL](#)

English