
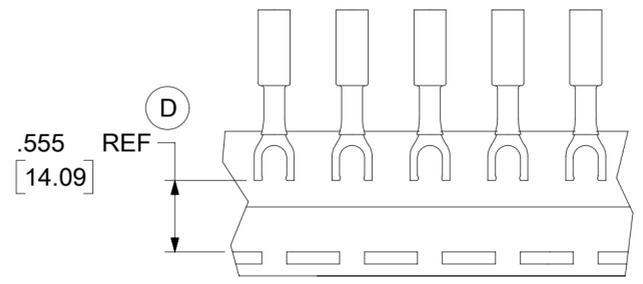


MAT'L NO (LOOSE PC)	ENG NO (LOOSE PC)	MAT'L NO (ON TAPE)	ENG NO (ON TAPE)	STUD SIZE	Ø"S" ±.010 (0.25)
191640006	SA-235-06	191641155	SA-235-06T	6	.146 (3.71)
191640007	SA-235-08	191641156	SA-235-08T	8	.173 (4.39)
191640008	SA-235-10	191641157	SA-235-10T	10	.198 (5.03)

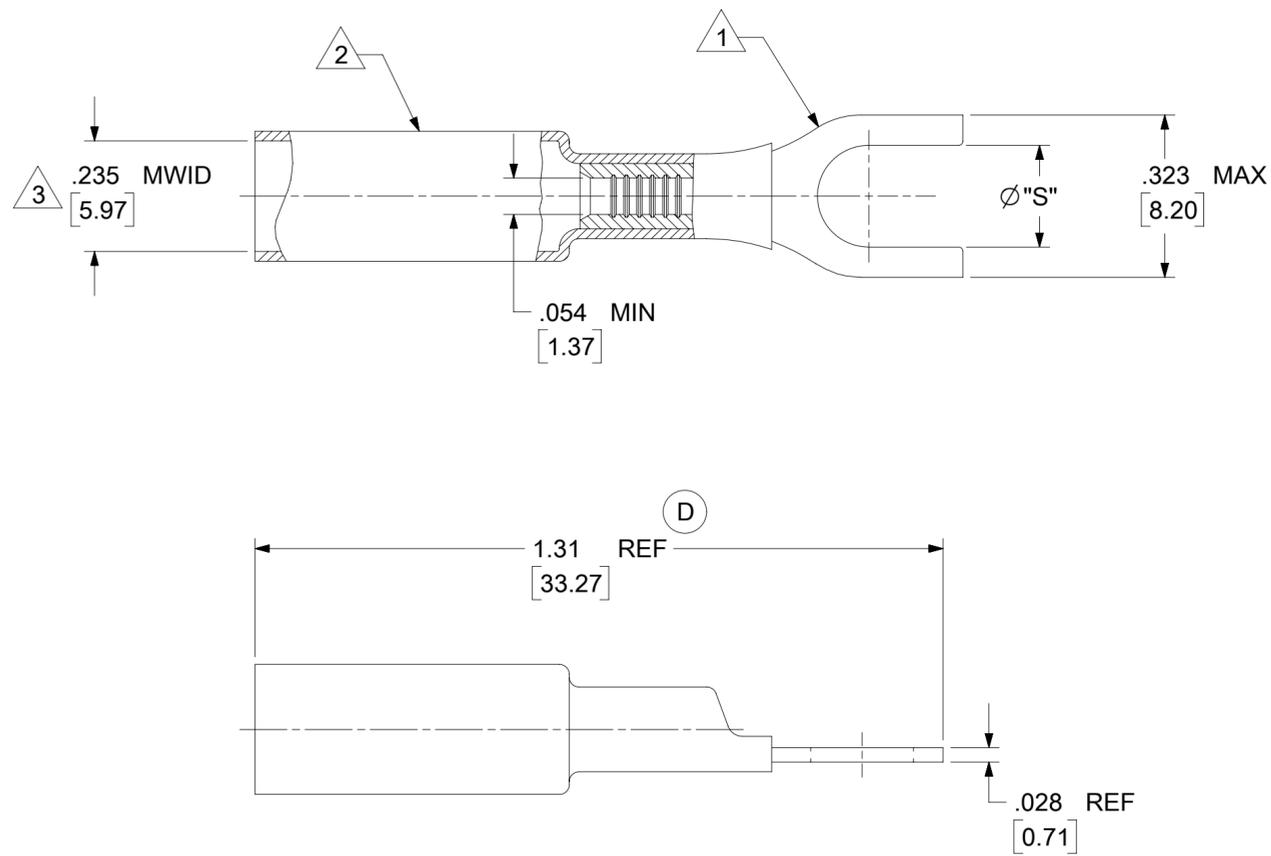

PARTS ON TAPE

- NOTES:
- 1 TERMINAL MATERIAL: TIN PLATED COPPER
 - 2 INSULATION MATERIAL: HEAT SHRINKABLE TUBING WITH HOTMELT ADHESIVE LINER. COLOR: RED.
 - 3 MWID = MAXIMUM WIRE INSULATION DIAMETER.
 - 4. MUST BE RoHS COMPLIANT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: MADE DIMS REF							
∇ = 0	IN/MM	NTS				molex SPADE TERMINAL NIAC 22-18 AWG PRODUCT CUSTOMER DRAWING							
∇ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 803695 DRWN: DEANMM1 2024/11/01 CHK'D: ETHRODAHL 2024/11/11 APPR: ETHRODAHL 2024/11/11								
∇ = 0	4 PLACES	±	MM	±	INCH					INITIAL REVISION: DRWN: ASAYDEH 2013/05/12 APPR: RDEROSS 2013/05/12			
∇ = 0	3 PLACES	±			DOCUMENT NUMBER: SD-19164-025 DOC TYPE: PSD DOC PART: 001 REVISION: D								
∇ = 0	2 PLACES	±			MATERIAL NUMBER: SEE CHART CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1								
∇ = 0	1 PLACE	±			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIRD ANGLE PROJECTION DRAWING: C-SIZE SERIES: 19164								
∇ = 0	0 PLACES	±											
∇ = 0	ANGULAR TOL	± °											