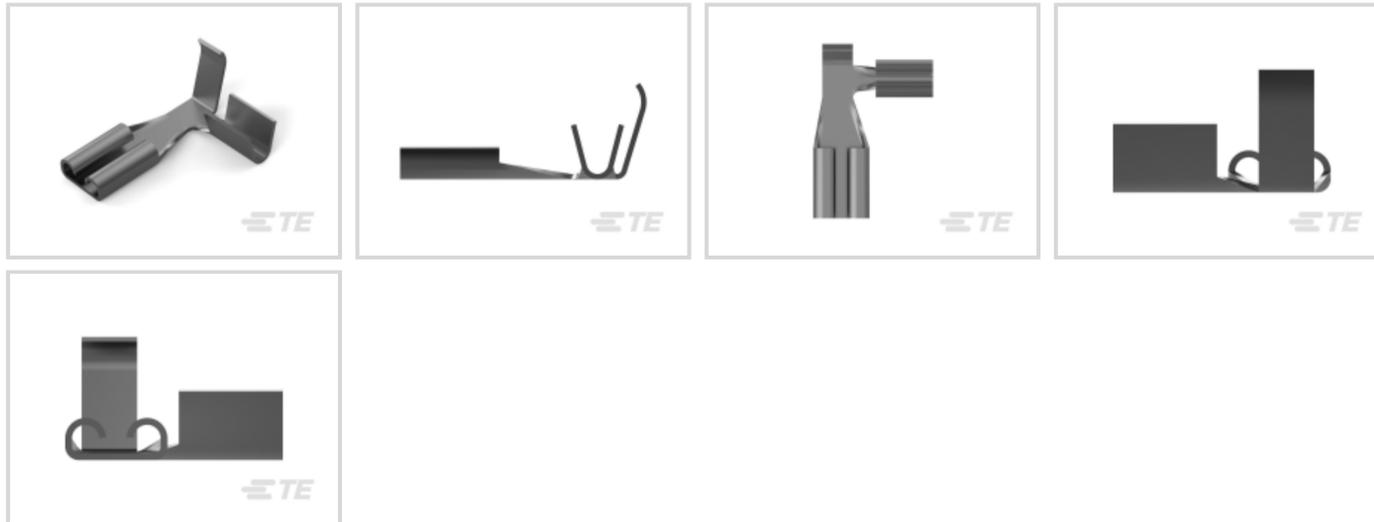# 141352-4 ✓ ACTIVE

FASTON | FASTON 110

TE Internal #: 141352-4

Quick Disconnect Receptacle, Uninsulated, 22 – 18 AWG, .32 – .82 mm² Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Flag, Brass, FASTON 110

View on TE.com >

Terminals & Splices > Quick Disconnects

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.32 – .82 mm²**

Mating Tab Width: **2.8 mm [.11 in]**

Mating Tab Thickness: **.66 mm [.026 in]**

Features

Product Type Features

Insertion Force	Low

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.66 mm[.026 in]
Terminal Orientation	Flag
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

141352-4

Quick Disconnect Receptacle, Uninsulated, 22 – 18 AWG, .32 – .82 mm² Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Flag, Brass, FASTON 110

Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	10.5 mm[.413 in]
Compatible Insulation Diameter Range	1.6 – 2.5 mm[.063 – .098 in]
Terminal Material Thickness	.25 mm[.01 in]
Wire Size	.32 – .82 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	7500
Packaging Method	Strip/Reel

Other

Line	Premier

Product Compliance

For compliance documentation, visit the product page on TE.com>

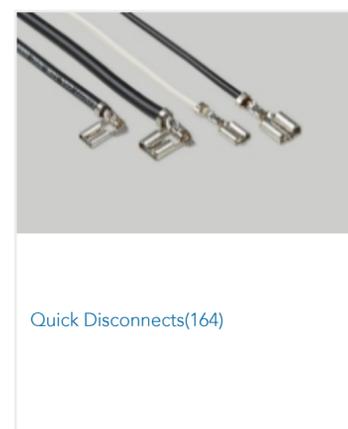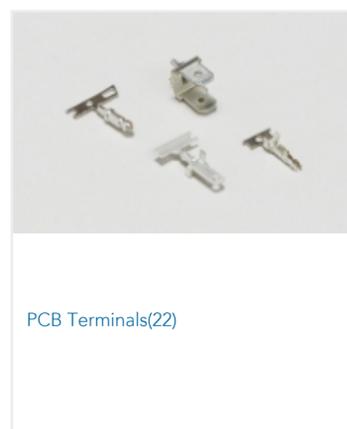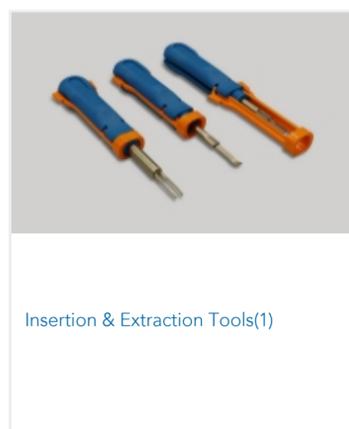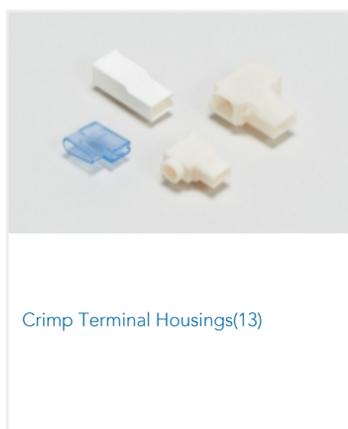| EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

Quick Disconnect Receptacle, Uninsulated, 22 – 18 AWG, .32 – .82 mm² Wire, 2.8 mm [.11 in] Tab Width, F-Crimp, Flag, Brass, FASTON 110

Compatible Parts

TE Part # 141939-1
110 FASTON,FLAG,REC.,22-18 AWG, BR

TE Part # 2150100-1
OCEAN_2.0_APPLICATOR-E-070F110O-SEM

TE Part # 2150100-2
OCEAN_2.0_APPLICATOR-E-070F110OA-SEA

TE Part # 7-2150100-7
OCEAN_2.0_SPARE_PART_KIT-070F110O

Also in the Series | FASTON 110

Crimp Terminal Housings(13)

Insertion & Extraction Tools(1)

PCB Terminals(22)

Quick Disconnects(164)

Customers Also Bought

TE Part #41774
250 FASTON REC 18-14 AWG TPBZ

TE Part #63315-1
250 FASTON FLAG 18-14 AWG BR

TE Part #180984
FASTON 250 BOOT FLAG NYLON NAT

TE Part #6-534267-7
04 MODIV VRT DR DE 100/125

141352-4

Quick Disconnect Receptacle, Uninsulated, 22 – 18 AWG, .32 – .82 mm² Wire, 2.8 mm
[.11 in] Tab Width, F-Crimp, Flag, Brass, FASTON 110

TE Part #928884-2
110 FASTON FLAG REC 22-18 AWG BR

TE Part #1622345-1
LR1 1% 18K2

TE Part #2-1879353-8
RR02 5% 56K AMMO

TE Part #4-2176315-7
MELF SMA_A 560R 1% 50PPM 0204 0.4 W

TE Part #2427987-1
Conn G FNG 38999 S3 Shell 11

TE Part #9-1415430-7
0430 17 0706 06

Documents

Product Drawings

110 FASTON,FLAG,REC.,22-18 AWG,PTBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_141352-4_R.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_141352-4_R.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_141352-4_R.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English