




Terminals & Splices > Quick Disconnects

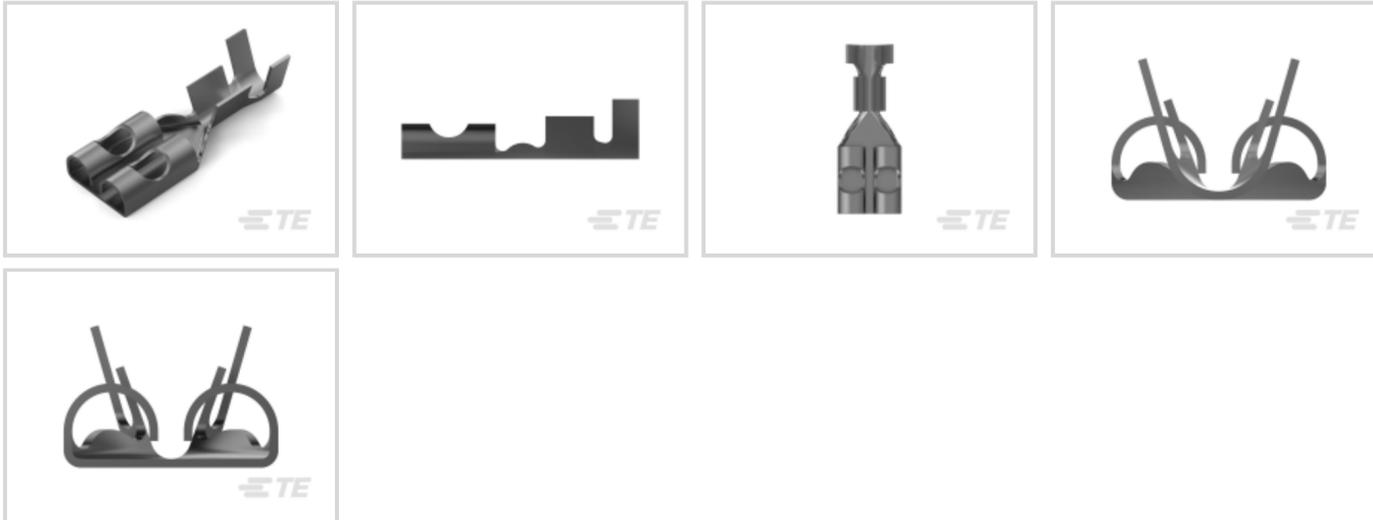

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .51 – 2.08 mm<sup>2</sup>

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .61 mm [.024 in]

### Features

#### Product Type Features

Insertion Force	Normal
-----------------	--------

#### Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

#### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.61 mm [.024 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

#### Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

### Mechanical Attachment

Wire Insulation Support	With
Extraction Force	.5 – 4 kgf

### Dimensions

Product Length	19.6 mm[.77 in]
Compatible Insulation Diameter Range	2.21 – 3.4 mm[.087 – .134 in]
Terminal Material Thickness	.3 mm[.012 in]
Wire Size	.51 – 2.08 mm <sup>2</sup>

### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

### Packaging Features

Packaging Quantity	4000
Packaging Method	Strip/Reel

### Other

Line	FASTON .250
------	-------------

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts



TE Part # 2150034-1  
OCEAN\_2.0\_APPLICATOR-E-110F180F-REM



TE Part # 2150034-2  
OCEAN\_2.0\_APPLICATOR-E-110F180FA-REA

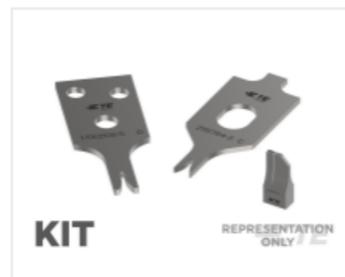

TE Part # 7-2150034-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-110F180F

## Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(115)



Insulation Boots & Sleeves(16)



Magnet Wire Terminals(1)



PCB Terminals(133)



Quick Disconnects(418)



Splices(4)

## Customers Also Bought



TE Part #HC5881  
BAT 1/4" UNC BOLT/WASHER ASSMB



TE Part #170341-3  
FF 250 TAB 14-12AWG TPBR  
WITHOUT LATCH



TE Part #172128-1  
FF 250 REC HSG 1P NYLON NAT



TE Part #172130-2  
FF 250 REC HSG 2P NYLON BLCBK



TE Part #2-172132-1  
FF 250 PLUG HSG 3P NYLON NAT



TE Part #174197-1  
FASTON .250 SERIES (6.3 MM)  
HOUSING



TE Part #2293895-1  
187 FASTON,REC.,17-14 AWG,TPBR



TE Part #2319021-1  
REC CONN CVR,8POS,AMP MCP 2.8,  
FRB



TE Part #1-172131-1  
FF 250 CAP HSG 3P NYLON NAT



TE Part #174198-1  
FASTON .250 SERIES (6.3 MM)  
HOUSING

## Documents

### Product Drawings

[250 FASTON,REC.,20-14 AWG,TPBR](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_170342-2\\_L\\_c-170342-2-l.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_170342-2\\_L\\_c-170342-2-l.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_170342-2\\_L\\_c-170342-2-l.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Product Specifications



[Crimping of 250 Series Tab and Receptacle Contacts](#)

Japanese

[Application Specification](#)

Japanese

[Application Specification](#)

Japanese

[Crimping of 250 Series Tab and Receptacle Contacts](#)

Japanese