

179974-1 ✓ ACTIVE

Positive Lock | Positive Lock 250


TE Internal #: 179974-1

Quick Disconnect Receptacle, Uninsulated, 18 – 14 AWG, .82 – 2.08 mm² Wire, 6.35 mm [.25 in] Tab Width, F-Crimp, Straight, Brass, Positive Lock 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

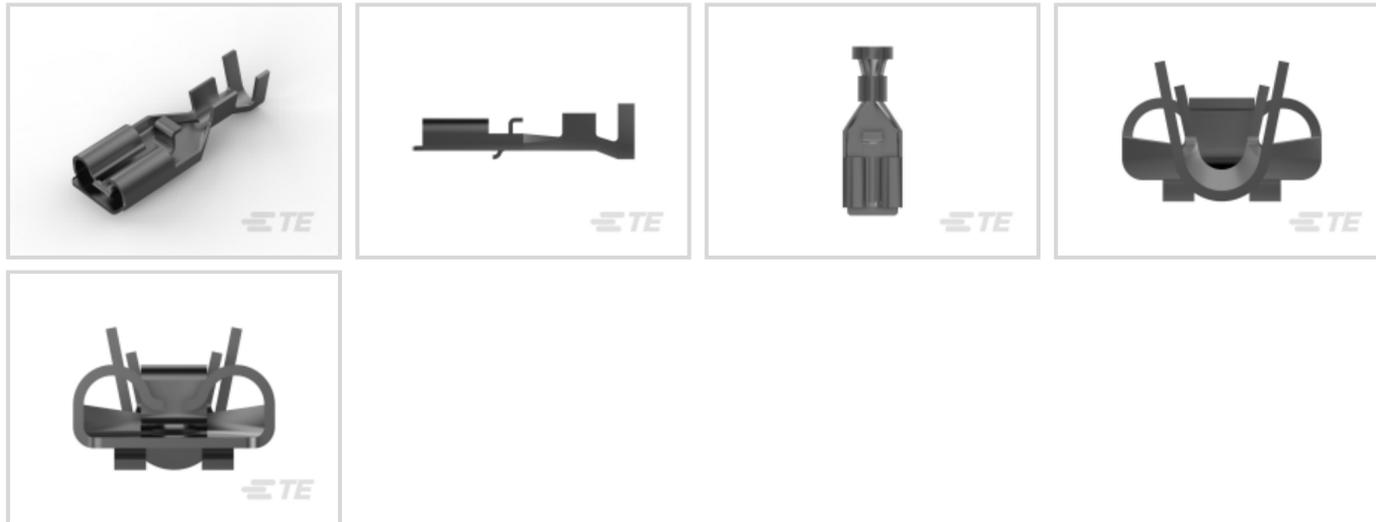

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
--------------------------------	------------

Mating Tab Width	6.35 mm [.25 in]
------------------	------------------

Mating Tab Thickness	.81 mm [.032 in]
----------------------	------------------

Terminal Orientation	Straight
----------------------	----------

Contact Base Material	Brass
-----------------------	-------

Terminal Plating Material	Pre-Tin
---------------------------	---------

Crimp Type	F-Crimp
------------	---------

Barrel Type	Open
-------------	------

Termination Features



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple
Extraction Force	.6 – 3 kgf

Dimensions

Product Length	21.2 mm [.834 in]
Compatible Insulation Diameter Range	2.21 – 3.4 mm [.087 – .134 in]
Terminal Material Thickness	.41 mm [.016 in]
Wire Size	.82 – 2.08 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	4500
Packaging Method	Strip/Reel

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 179970-1
250 HSG. PL EX REC.




TE Part # 179970-6
PL EXII 250 REC HSG 1P NYLON BLUE




TE Part # 179970-4
PL EXII 250 REC HSG 1P NYLON YELLOW




TE Part # 2150057-2
OCEAN_2.0_APPLICATOR-E-110F180F-REA

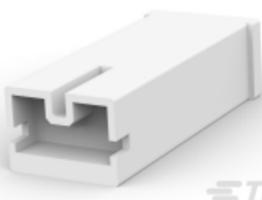


TE Part # 1-1318954-1
PL EXII 250 REC HSG 1P NYLON NAT




TE Part # 179970-9
PL EXII 250 REC HSG 1P NYLON BLACK

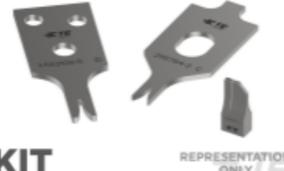

TE Part # 7-2150057-7
OCEAN_2.0_SPARE_PART_KIT-110F180F

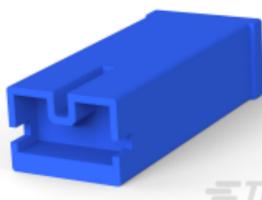

TE Part # 1-1318954-6
PL EXII 250 REC HSG 1P NYLON BLUE

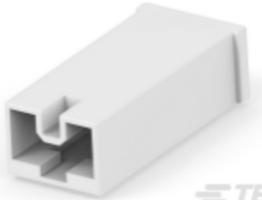


TE Part # 2509918-1
250 PL EX HSG.,REC.,1P,NATURAL



TE Part # 179970-2
PL EXII 250 REC HSG 1P NYLON RED



TE Part # 3-179970-1
PL EXII 250 REC HSG 1P NYLON NAT WITH

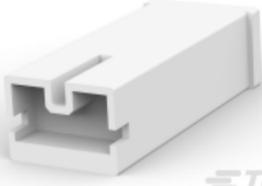


TE Part # 1318954-1
250 HSG. PL EX REC. NAT




TE Part # 1939581-1
250 HSG. PL EX REC. 15mm 2P NAT

Also in the Series | Positive Lock 250

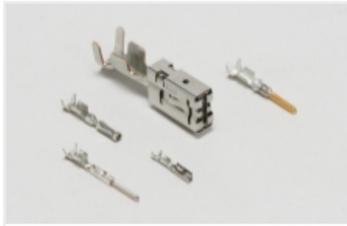

Automotive Terminals(1)

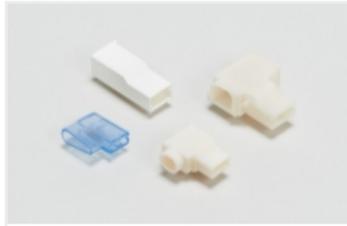

Crimp Terminal Housings(176)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(5)



Quick Disconnects(171)

Customers Also Bought



TE Part #41802
250 FASTON FLAG REC 18-12 AWG
TPBR




TE Part #42563-2
250 FASTON FLAG REC 12-10 AWG
TPBR




TE Part #170213-2
250 FASTON,REC.,18-14 AWG,TPBR




TE Part #2-172132-1
FF 250 PLUG HSG 3P NYLON NAT

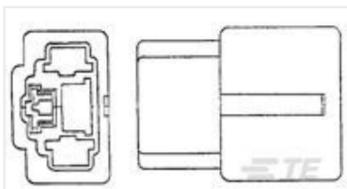

TE Part #176773-5
FF 250 CAP HSG 3P NYLON NAT

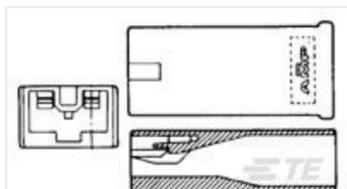

TE Part #179970-6
PL EXII 250 REC HSG 1P NYLON BLUE

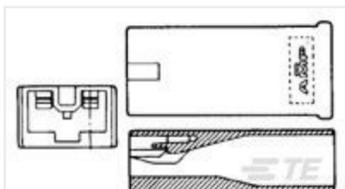


TE Part #179970-9
PL EXII 250 REC HSG 1P NYLON
BLACK



TE Part #913699-5
BLADE SHEAR



TE Part #1971031-1
Receptacle contact for GIC 2.0

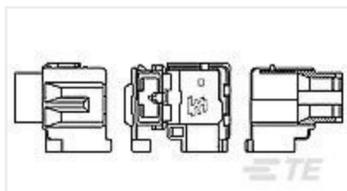

TE Part #2013799-1
250 HSG. PL EX REC. BLACK



Documents

Product Drawings

[250 PL EX REC. 18-14AWG PTBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_179974-1_J1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_179974-1_J1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_179974-1_J1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[POSITIVE LOCK EX-II CONNECTORS, INSTRUCTION SHEET](#)

Japanese

[Instruction Sheet \(non U.S.\)](#)

English

Agency Approvals

[UL Report](#)

English