

# 8.00MM SENTRALITY PIN AND SOCKET HIGH CURRENT CONNECTOR SYSTEM

<b>SOCKETS</b>	
<b>Press-Fit – Standard Option</b>	<b>SMT – Standard Option</b>
<b>Series: <a href="#">204316</a></b>	<b>Series: <a href="#">204318</a> ; <a href="#">212194</a></b>
	
<b>Press-Fit – With 1.00mm Float</b>	<b>SMT – With 1.00mm Float</b>
<b>Series: <a href="#">204313</a></b>	<b>Series: <a href="#">204365</a> ; <a href="#">212195</a></b>
	

**[SENTRALITY PIN AND SOCKET INTERCONNECTS](#)**

**[TABLE OF CONTENTS](#)**



REVISION: <b>C1</b>	ECM INFORMATION: EC No: 794315 DATE: 2024/08/14	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>1 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>

**PINS**

**Press-Fit**

**Series:** [203263](#)



**Standard SMT**

**Series:** [203263](#)



**Screw Mount**

**Series:** [203263](#)



[211922](#) – 8.00mm Interposer and Power Tap pins  
[212460](#) – 2 Circuit Male Wafer Assemblies for 8.00mm

**SENTRALITY PIN AND SOCKET INTERCONNECTS**

**TABLE OF CONTENTS**



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>2 of 18</b>		
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>	CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A					

## Table of Contents

<u>ITEMS</u>	<u>PAGE</u>
1.0 SCOPE .....	4
2.0 PRODUCT DESCRIPTION .....	4
2.1 DESCRIPTION, SERIES NUMBER, AND LINKS .....	4
2.2 DIMENSIONS, MATERIALS, PLATINGS .....	5
2.3 ENVIRONMENTAL CONFORMANCE .....	5
2.4 SAFETY AGENCY APPROVALS .....	5
3.0 APPLICABLE DOCUMENTS AND SPECIFICATION .....	6
3.1 MOLEX DOCUMENTS .....	6
3.2 INDUSTRY DOCUMENTS .....	7
4.0 ELECTRICAL PERFORMANCE RATINGS .....	7
4.1 VOLTAGE .....	7
4.2 CURRENT CAPABILITY ** .....	7
4.3 RESISTANCE .....	12
4.4 TEMPERATURE .....	12
4.5 DURABILITY .....	13
5.0 QUALIFICATION .....	13
6.0 PERFORMANCE .....	13
6.1 ELECTRICAL PERFORMANCE .....	13
6.2 MECHANICAL PERFORMANCE .....	14
6.3 ENVIRONMENTAL PERFORMANCE .....	15
7.0 TEST SEQUENCE .....	16
7.1 RELIABILITY TEST SEQUENCES PER EIA-364-1000 .....	16
7.2 MECHANICAL TEST SEQUENCES .....	17
7.3 TEMPERATURE RISE TEST SEQUENCES .....	17
8.0 PACKAGING .....	18

### SENTRALITY PIN AND SOCKET INTERCONNECTS

### TABLE OF CONTENTS



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
<b>C1</b>	EC No: <b>794315</b> DATE: <b>2024/08/14</b>	<b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>				<b>3 of 18</b>
DOCUMENT NUMBER:	DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
<b>2043130001-PS</b>	<b>PS</b>	<b>000</b>	<b>SOURAJ</b>	<b>SCS02</b>	<b>HTHYAGARAJ</b>	
TEMPLATE FILENAME: 1703070003 REV A						

## 1.0 SCOPE

The Product Specification covers the reliability test data of family 8.00mm Sentrality High Power interconnect systems which consists of various mounting options.

## 2.0 PRODUCT DESCRIPTION

The 8.00mm Sentrality High Power Interconnect System Connector is a single circuit connector system with available 1.00mm of actual float for high power busbar and PCB applications. The power circuit terminals are terminated to a busbar and / or PCB and uses a gold mating to silver interface with a terminal tarnish protection lubricant.

### 2.1 DESCRIPTION, SERIES NUMBER, AND LINKS

This specification covers the performance requirements and test methods for the following products listed by series:

SOCKETS		
Termination Style	Series Number	Packaging Type
Press-Fit Standard	<a href="#">204316</a>	<a href="#">Tray</a>
SMT Standard	<a href="#">204318</a>	<a href="#">Tray</a>
	<a href="#">212194</a>	<a href="#">Tape &amp; Reel</a>
Press-Fit with Float	<a href="#">204313</a>	<a href="#">Tray</a>
SMT with Float	<a href="#">204365</a>	<a href="#">Tray</a>
	<a href="#">212195</a>	<a href="#">Tape &amp; Reel</a>
		<a href="#">Tape &amp; Reel</a>
Screw Mount Socket	<a href="#">214338</a>	<a href="#">Tray</a>

Pin	
Series	Termination Style
<a href="#">203263</a>	<a href="#">Press-Fit</a>
	<a href="#">Surface Mount</a>
	<a href="#">Screw Mount</a>
<a href="#">211922</a> – 8.00mm Interposer and Power Tap pins	
<a href="#">212460</a> – 2 Circuit Male Wafer Assemblies for 8.00mm	

## SENTRALITY PIN AND SOCKET INTERCONNECTS

### TABLE OF CONTENTS



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>4 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A			

## 2.2 DIMENSIONS, MATERIALS, PLATINGS

1. Dimensions: Refer to sales drawing.
2. Material: RoHS compliant materials:
  - a. Power Male Pins: Copper Alloy.
  - b. Power Female Sockets:
    - i. Terminal Contacts: Copper Alloy.
    - ii. Components: Copper Alloy and Stainless Steel.
3. Plating:
  - a. Power Male Pins: Silver Plating with a Tarnish Inhibitor.
  - b. Power Female Sockets: Gold Plating for Terminal Contact (Mating Interference), Remaining Components are Silver Plated with Tarnish Inhibitor.
4. Refer to [2043131234-TS](#) for effects of tarnish on connector.

## 2.3 ENVIRONMENTAL CONFORMANCE

To find product compliance information:

- a. [Go to molex.com](#)
- b. Enter the part number in the search field.
- c. At the bottom of the page go to “Environmental” to see compliance status.

## 2.4 SAFETY AGENCY APPROVALS



2.4.1 <sup>C</sup> <sup>US</sup> File Number\*: 70184994

CSA approval meets following standards/test procedures:

- a) CSA STD. C22.2 No. 182.3-M1987
- b) UL-1977

\* - “C” and “US” mark adjacent to CSA signifies that the product has been evaluated to the applicable CSA and ANSI/UL standards, for use in Canada and US respectively.

<b>CSA</b>
<b>NON-current interruption</b>
175 Amps @ 600V for standard interface
175 Amps @ 600V for floating interface

2.4.2 UL File Number: E29179

<b>UL</b>
<b>NON-current interruption</b>
175 Amps @ 600V for standard interface
175 Amps @ 600V for floating interface

**SENTRALITY PIN AND SOCKET INTERCONNECTS**

**TABLE OF CONTENTS**



REVISION:	ECM INFORMATION:	TITLE:				SHEET No.
<b>C1</b>	EC No: <b>794315</b> DATE: <b>2024/08/14</b>	<b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>				<b>5 of 18</b>
DOCUMENT NUMBER:	DOC TYPE:	DOC PART:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:	
<b>2043130001-PS</b>	<b>PS</b>	<b>000</b>	<b>SOURAJ</b>	<b>SCS02</b>	<b>HTHYAGARAJ</b>	
TEMPLATE FILENAME: 1703070003 REV A						

### 3.0 APPLICABLE DOCUMENTS AND SPECIFICATION

#### 3.1 MOLEX DOCUMENTS

8.00mm Sentrality High Power interconnect System Documents						
Type	Termination Style	Sales Drawing	Packaging Drawing	Test Summary	Application Specification	
Socket	Press-Fit Standard	<a href="#">2043160001-SD</a>				
	SMT Standard	<a href="#">2043180001-SD</a>	<a href="#">2043180001-PK</a>			
		<a href="#">2043185001-SD</a>				
		<a href="#">2043180011-SD</a>				
		<a href="#">2121940001-SD</a>	<a href="#">2043180000-PK</a>			
		<a href="#">2121945001-SD</a>				
		<a href="#">2121940011-SD</a>	<a href="#">2121940011-PK</a>			
		<a href="#">2121940051-SD</a>				
	Press-Fit with Float	<a href="#">2043130010-SD</a>			<a href="#">2043130008-TS</a>	<a href="#">2043130001-AS</a>
	SMT with Float	<a href="#">2043650010-SD</a>	<a href="#">2043650010-PK</a>			
		<a href="#">2043655010-SD</a>				
		<a href="#">2043650012-SD</a>				
		<a href="#">2043650014-SD</a>				
		<a href="#">2121950010-SD</a>	<a href="#">2043650000-PK</a>			
		<a href="#">2121955010-SD</a>				
<a href="#">2121955110-SD</a>						
<a href="#">2121950012-SD</a>		<a href="#">2121950012-PK</a>				
<a href="#">2121956012-SD</a>						
<a href="#">2121950014-SD</a>	<a href="#">2121950014-PK</a>					
Screw Mount Socket	<a href="#">2143380001-SD</a>	<a href="#">2143380001-PK</a>				
Pin	Press-Fit	<a href="#">2032630001-SD</a>	<a href="#">2032630006-PK</a>			
	Surface Mount	<a href="#">2032633080-SD</a>	<a href="#">2032630006-PK</a>			
	Screw Mount	<a href="#">2032634185-SD</a>	<a href="#">2032630006-PK</a>			

#### Additional Reference Documents

1. Product Specification of 3.40mm Sentrality (Pin and Socket) – [2043130018-PS](#)
2. Product Specification of 6.00mm Sentrality (Pin and Socket) – [2043130006-PS](#)
3. Product Specification of 6.00mm PowerWize W-t-B Connector System – [2119410000-PS](#)
4. Product Specification of 8.00mm PowerWize W-t-B Connector System – [2046000001-PS](#)
5. Product Specification of 11.00mm Sentrality (Pin and Socket) – [2138800001-PS](#)

## SENTRALITY PIN AND SOCKET INTERCONNECTS

### TABLE OF CONTENTS



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>6 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>

**Other General Molex Documents**

- [Molex Solderability Specification SMES-152](#)
- [Molex Heat Resistance Specification AS-40000-5013](#)
- [Molex Moisture Technical Advisory AS-45499-001](#)
- [Molex Package Handling Specification 454990100-PK](#)

**3.2 INDUSTRY DOCUMENTS**

- EIA-364-1000
- UL-60950-1
- CSA STD. C22.2 NO. 182.3-M1987

**4.0 ELECTRICAL PERFORMANCE RATINGS**

**4.1 VOLTAGE**

600 Volts

**Connector Rating per UL-1977**

Connector voltage rating meets the connector approval level defined by UL 1977, Sect. 11 for spacing per table 11.1. Example: 1.2 mm for ≤ 250 volt; 3.2 mm for ≥ 250 volt.

Exception taken for spacing less than those specified are permitted, if the device complies with the requirements in the dielectric voltage withstanding test per Sect. 17.

**Application Voltage Guideline**

For application voltage requirements per UL-60950 or other standards, the creepage & clearance also needs to be determined based upon pads/traces on the PCB.

**4.2 CURRENT CAPABILITY \*\***

See Temperature vs. Current and Voltage Drop vs. Current charts below for applicable current rating per application.

\*\* Current rating is application dependent. Above rating is only a guideline. Appropriate de-rating is required per ambient conditions, copper weight of PCB, gross heating from adjacent modules/components, and other factors that influence connector performance.


**SENTRALITY PIN AND SOCKET INTERCONNECTS**

**TABLE OF CONTENTS**



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>7 of 18</b>		
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>	CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A					

8mm Sentrality (Single Coupon) - Temperature vs. Current – 1/0 AWG Wire

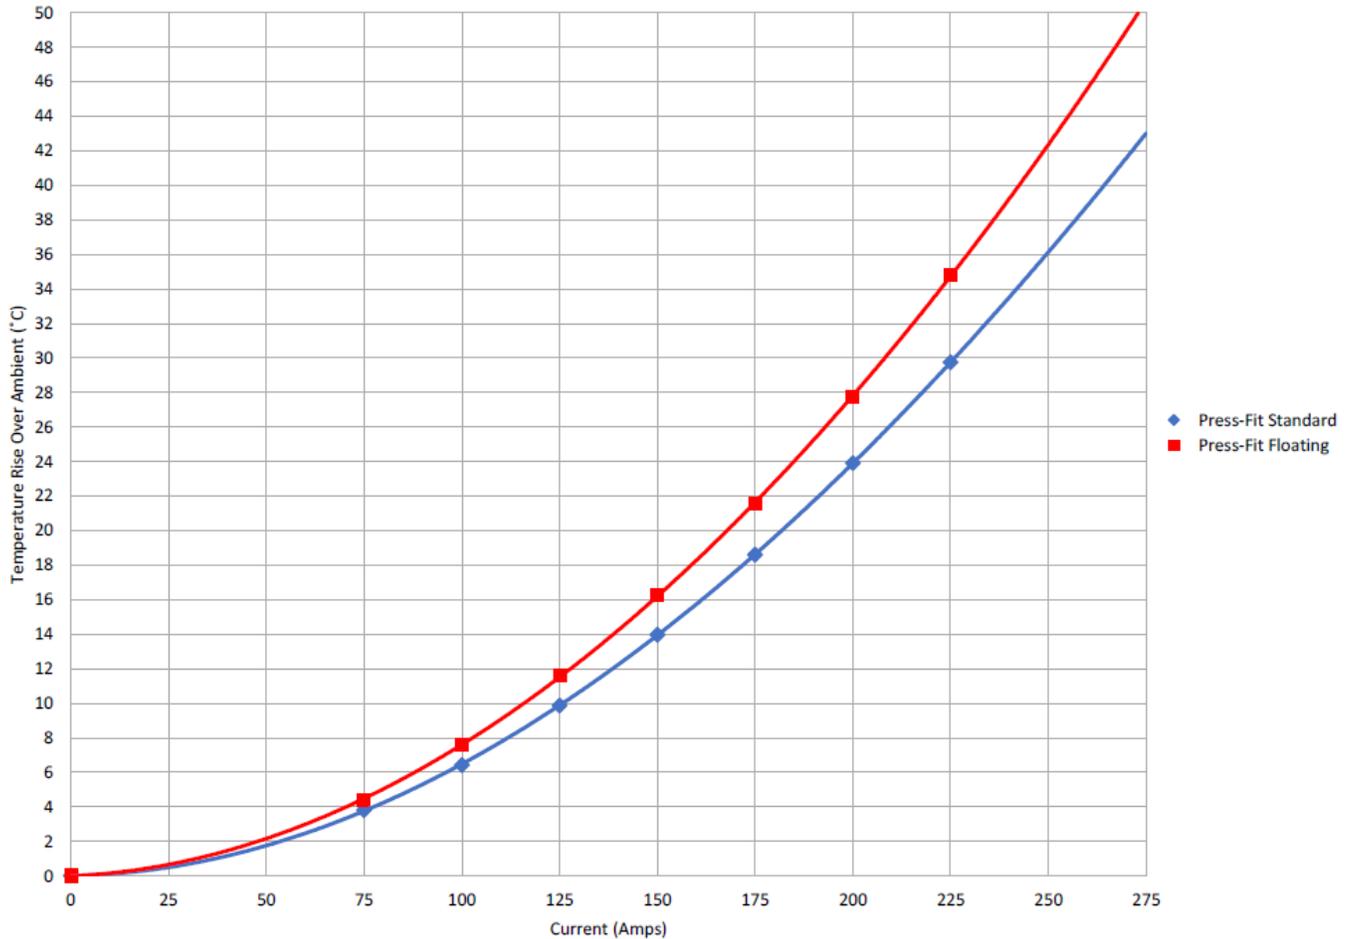


**SENTRALITY PIN AND SOCKET INTERCONNECTS**

**TABLE OF CONTENTS**



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>8 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A			

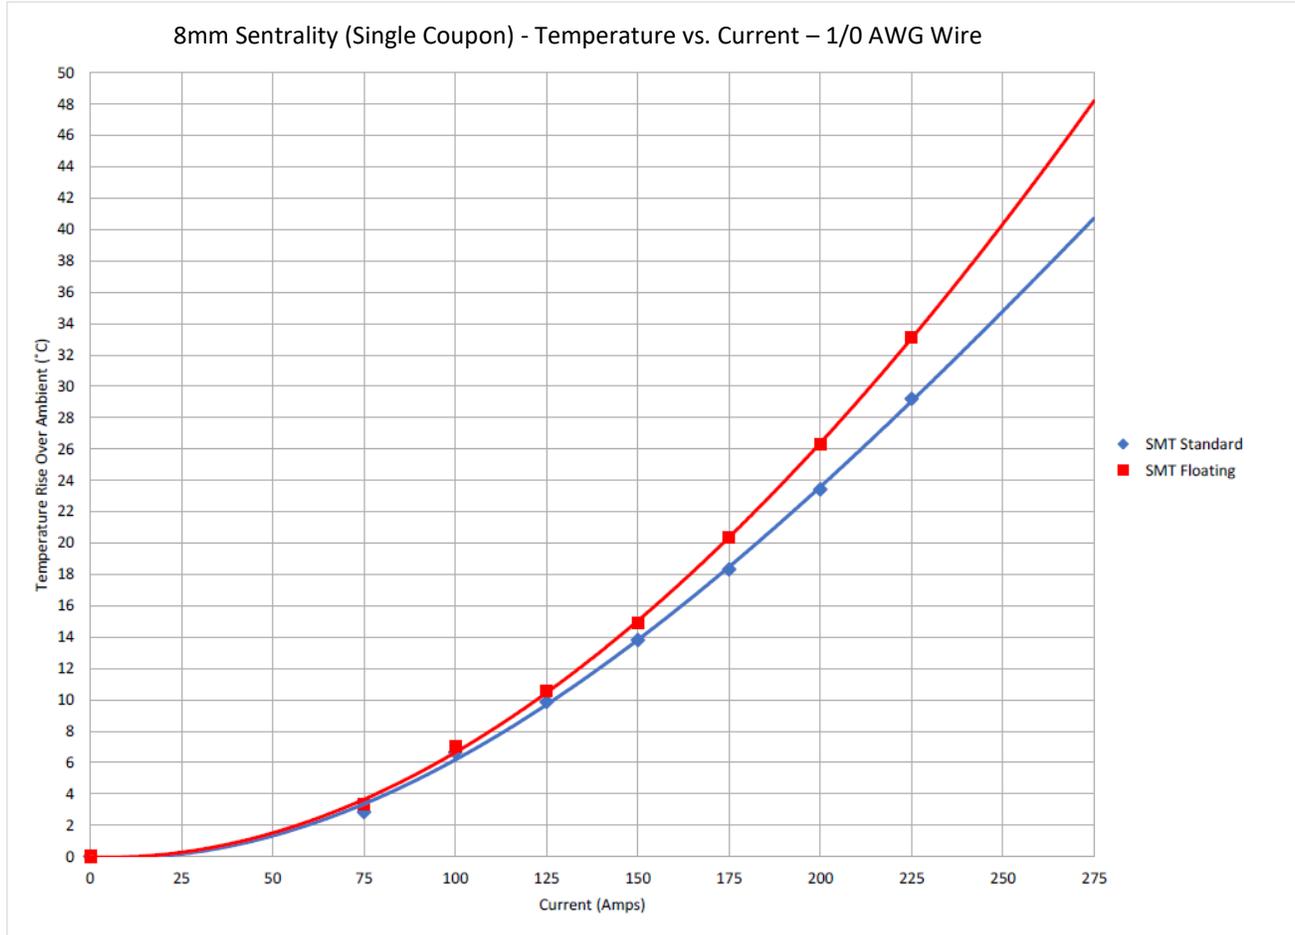


**SENTRALITY PIN AND SOCKET INTERCONNECTS**

**TABLE OF CONTENTS**



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>9 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A			

8mm Centrality (Single Coupon Samples) - Voltage vs. Current – All Press-Fit Samples, 1/0 AWG Wire

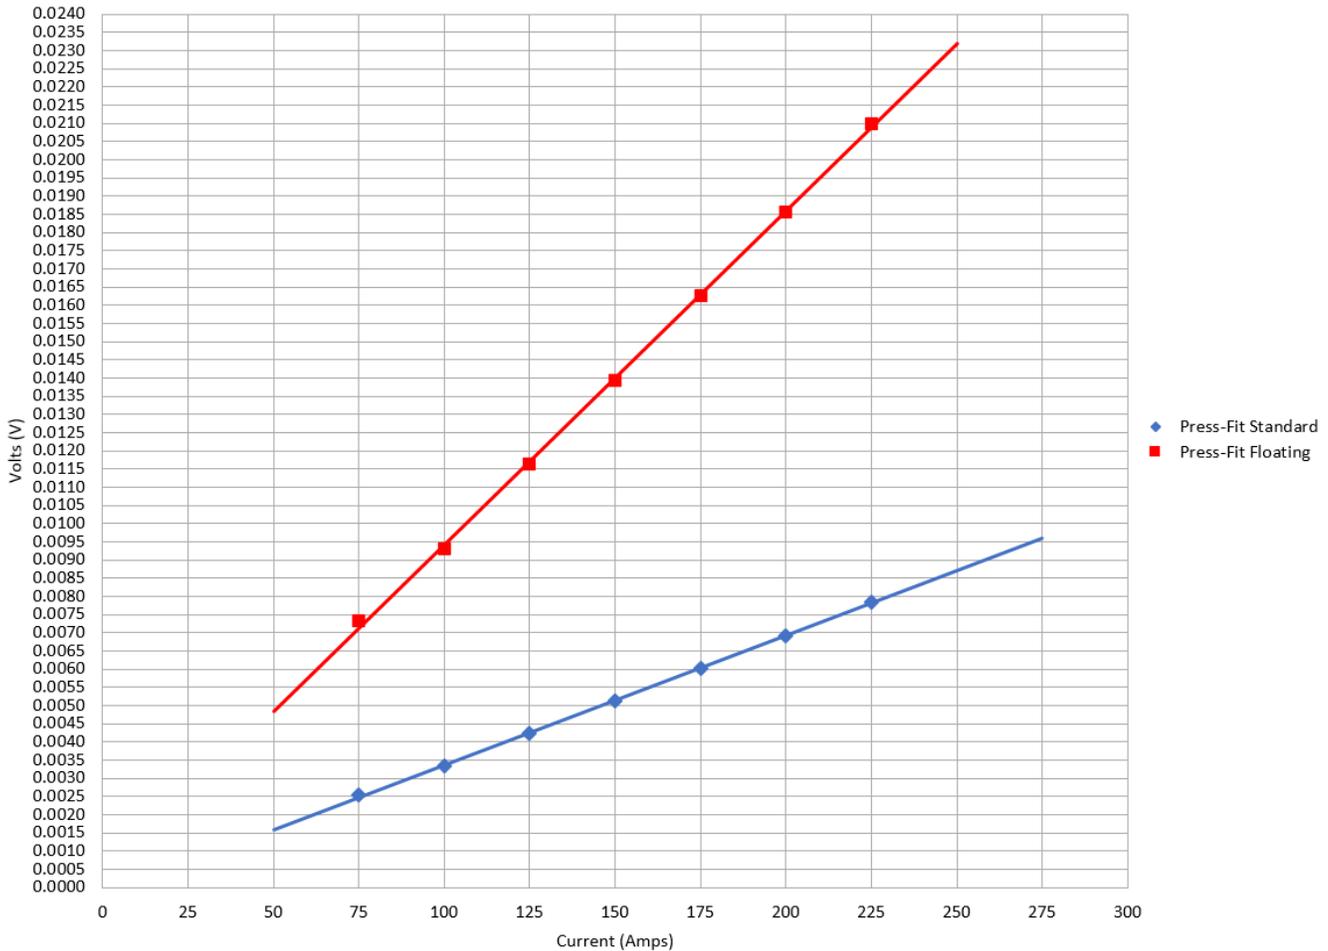


**SENTRALITY PIN AND SOCKET INTERCONNECTS**

[TABLE OF CONTENTS](#)



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>10 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A			

8mm Sentrality (Single Coupon Samples) - Voltage vs. Current – All SMT Samples, 1/0 AWG Wire

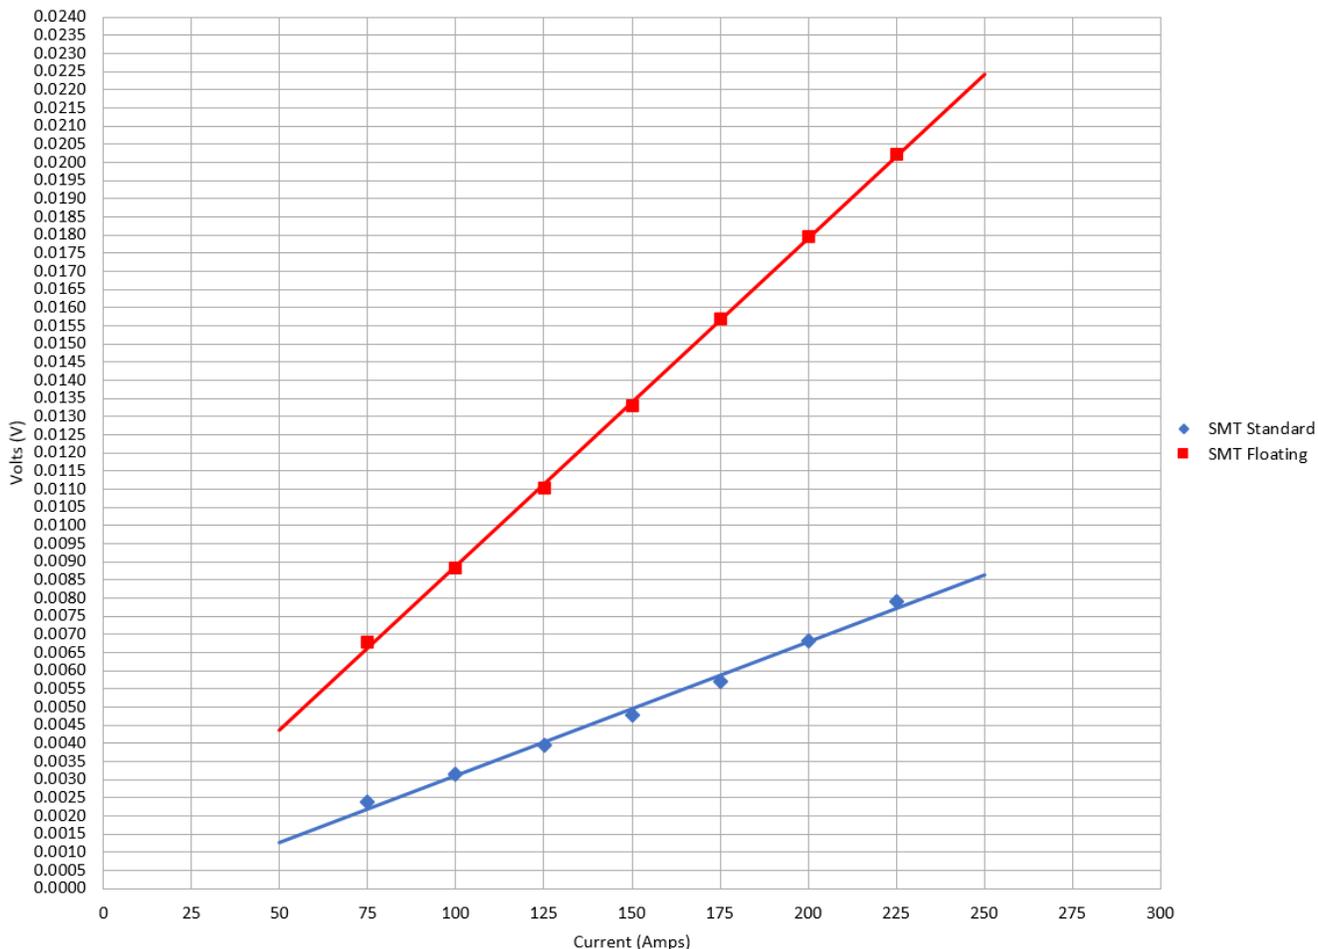

**SENTRALITY PIN AND SOCKET INTERCONNECTS**

**TABLE OF CONTENTS**




REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>11 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A			

**4.3 RESISTANCE**

0.20 milliohm (Nominal).

All resistance values are nominal, From Male Pin Board – to – Socket Board, values including connector bulk resistance and contact resistance.

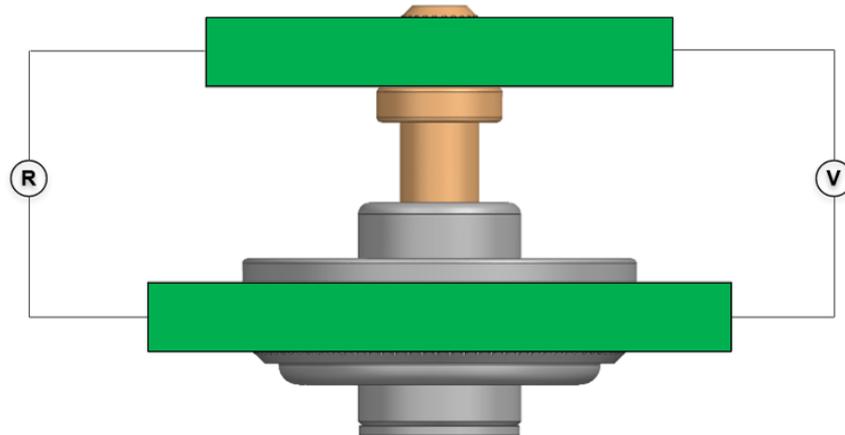

**4.4 TEMPERATURE**

Operating Temperature Range (includes T-Rise from applied current) : - 40 °C to + 125 °C  
 Storage / Non-Operating Temperature Range : - 40 °C to + 85 °C

Field Temperature and Field Life: Temperature life tested per **EIA 364-17** Method A for **114 hrs@125° C** per table 8 to meet field temperature of **85° C for 10 years life\***.

Further testing completed per USCAR-2 Rev6 for 1008 hrs@150°C. See [2043131000-TS](#).

**\*Note:**

Temperature life tested per EIA 364-17 Method A for 114 hrs. @ 125 °C per table – 8.  
 Temperature life test duration ([section 6.3 item 1](#)) is based on the assumption that the contact spends **1/3** of its field life at that temperature which is **85° C** and its remaining life at **40 °C** or less.  
 (Based on EIA-364-1000, table 8)

**SENTRALITY PIN AND SOCKET INTERCONNECTS**

**TABLE OF CONTENTS**



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>12 of 18</b>		
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>	CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A					

## 4.5 DURABILITY

Plating Type	Number of Cycles
Gold Plated – Socket Contact Silver Plated – Pin Surface	200*

*\*Mechanical / Non – Environmental Durability.*

*\*Based on EIA-364-1000.01 test method C section 7.*

*As tested in accordance with EIA-364-1000 test method ([see section 6.2 item 5 of this specification](#)).  
Durability per EIA-364-09*

## 5.0 QUALIFICATION

Laboratory condition, sample selection and test sequences are in accordance with EIA-364-1000.  
[See page 16](#) for detail test sequence of EIA-364-1000.01

## 6.0 PERFORMANCE

### 6.1 ELECTRICAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
6.1.1	Contact Resistance (Low Level) (EIA-364-23)	Mate connectors, apply maximum voltage of 20 mV and current of 100 mA	Maximum 0.20 mΩ
6.1.2	Voltage Drop @ RATED CURRENT	Mate connectors, apply maximum current of 75 amps.	See Charts; Section 4.0
6.1.3	Temperature Rise	Mate connectors & Measure T-Rise @ Rated Current after 96 Hours per EIA-364-70	30 °C T-Rise
6.1.4	Temperature Rise (Via Current Cycling)	Mate connectors: measure the temperature rise at the rated current after 96 hours (steady state) 240 hours (45 minutes ON and 15 minutes OFF per hour) 96 hours (steady state) Steady state per EIA-364-70, Method 2. Current cycling per EIA-364-55, Test Condition A, Test Method 4	30 °C T-Rise

## SENTRALITY PIN AND SOCKET INTERCONNECTS

## TABLE OF CONTENTS



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>13 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>

## 6.2 MECHANICAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
6.2.1	Mating Force (EIA-364-37)	Mate connectors at a rate of 25.4 +/- 6 mm per minute.	45N Maximum
6.2.2	Unmating Force (EIA-364-37)	Unmate connectors at a rate of 25.4 +/- 6 mm per minute.	10N Minimum
6.2.3	Initial Floater Displacement Force (Side Force)	Displacement Float Feature 1.50mm (0.75mm both directions off center)	10N Minimum 60N Maximum
6.2.4	Offset Mating Insertion Force into Floater	Mate and Unmate receptacle male power pin 10 times in the offset position	90N Maximum
6.2.5	Durability w/o Environment (EIA-364-09)	Mate connectors 200 cycles at a maximum rate of 10 cycles per minute.	No damage which would impair operation  Maximum Change: 0.17 mΩ
6.2.6	Vibration (EIA-364-28)	Mate connectors and vibrate per EIA-364-28, test condition D 15 minutes each axis	Maximum Change: 0.17 mΩ No discontinuities greater than 1 μs
6.2.7	Mechanical Shock (EIA-364-27)	Mate connectors and shock at 50 g with ½ sine wave pulse (11 milliseconds) shocks in the X, Y, Z axis (18 shocks total)	Maximum Change: 0.17 mΩ No discontinuities greater than 1 μs

### SENTRALITY PIN AND SOCKET INTERCONNECTS

[TABLE OF CONTENTS](#)



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>14 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A			

## 6.3 ENVIRONMENTAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
6.3.1	Temperature Life (EIA-364-1000)	Mate Connectors, expose to 114 hours at 125 °C Per EIA-364-17 and EIA-364 TS-1000	Maximum Change: 0.17 mΩ
6.3.2	Thermal Shock (EIA-364-1000)	Mate connectors, expose to 10 cycles from -55 °C to 85 °C, dwell time for each extreme temperature is 30 minutes. Per EIA-364-32 Test Condition 1, Test Duration A-4	Maximum Change: 0.17 mΩ
6.3.3	Cyclic Temperature & Humidity (EIA-364-1000)	Mate connectors: 24 cycles at temperature 25 ± 3 °C at 80 ± 5% relative humidity and 65 ± 3 °C at 50 ± 5% relative humidity; dwell time of 1.0 hour; ramp time of 30 minutes. Per EIA-364-31	Maximum Change: 0.17 mΩ
6.3.4	Thermal Disturbance (EIA-364-1000)	Mate Connectors, cycle the connectors between 15 ± 3 °C and 85 ± 3 °C. Ramps should be a minimum of 2 °C per minute, and dwell times should ensure contacts reach the temperature extremes. Humidity is not controlled. 10 cycles Per EIA-364-110	Maximum Change: 0.17 mΩ
6.3.5	Mixed flowing Gas (EIA-364-1000)	Expose to MFG 224 hours unmated, 112 hours mated, Per EIA-364-65 Class IIA	Maximum Change: 0.17 mΩ
6.3.6	Dust Exposure (EIA-364-1000)	Unmate the connectors, expose the connector to Dust. Per EIA-364-91, Benign Dust Composition.	Maximum Change: 0.17 mΩ

[SENTRALITY PIN AND SOCKET INTERCONNECTS](#)


[TABLE OF CONTENTS](#)



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>15 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>

**7.0 TEST SEQUENCE**

**7.1 RELIABILITY TEST SEQUENCES PER EIA-364-1000**

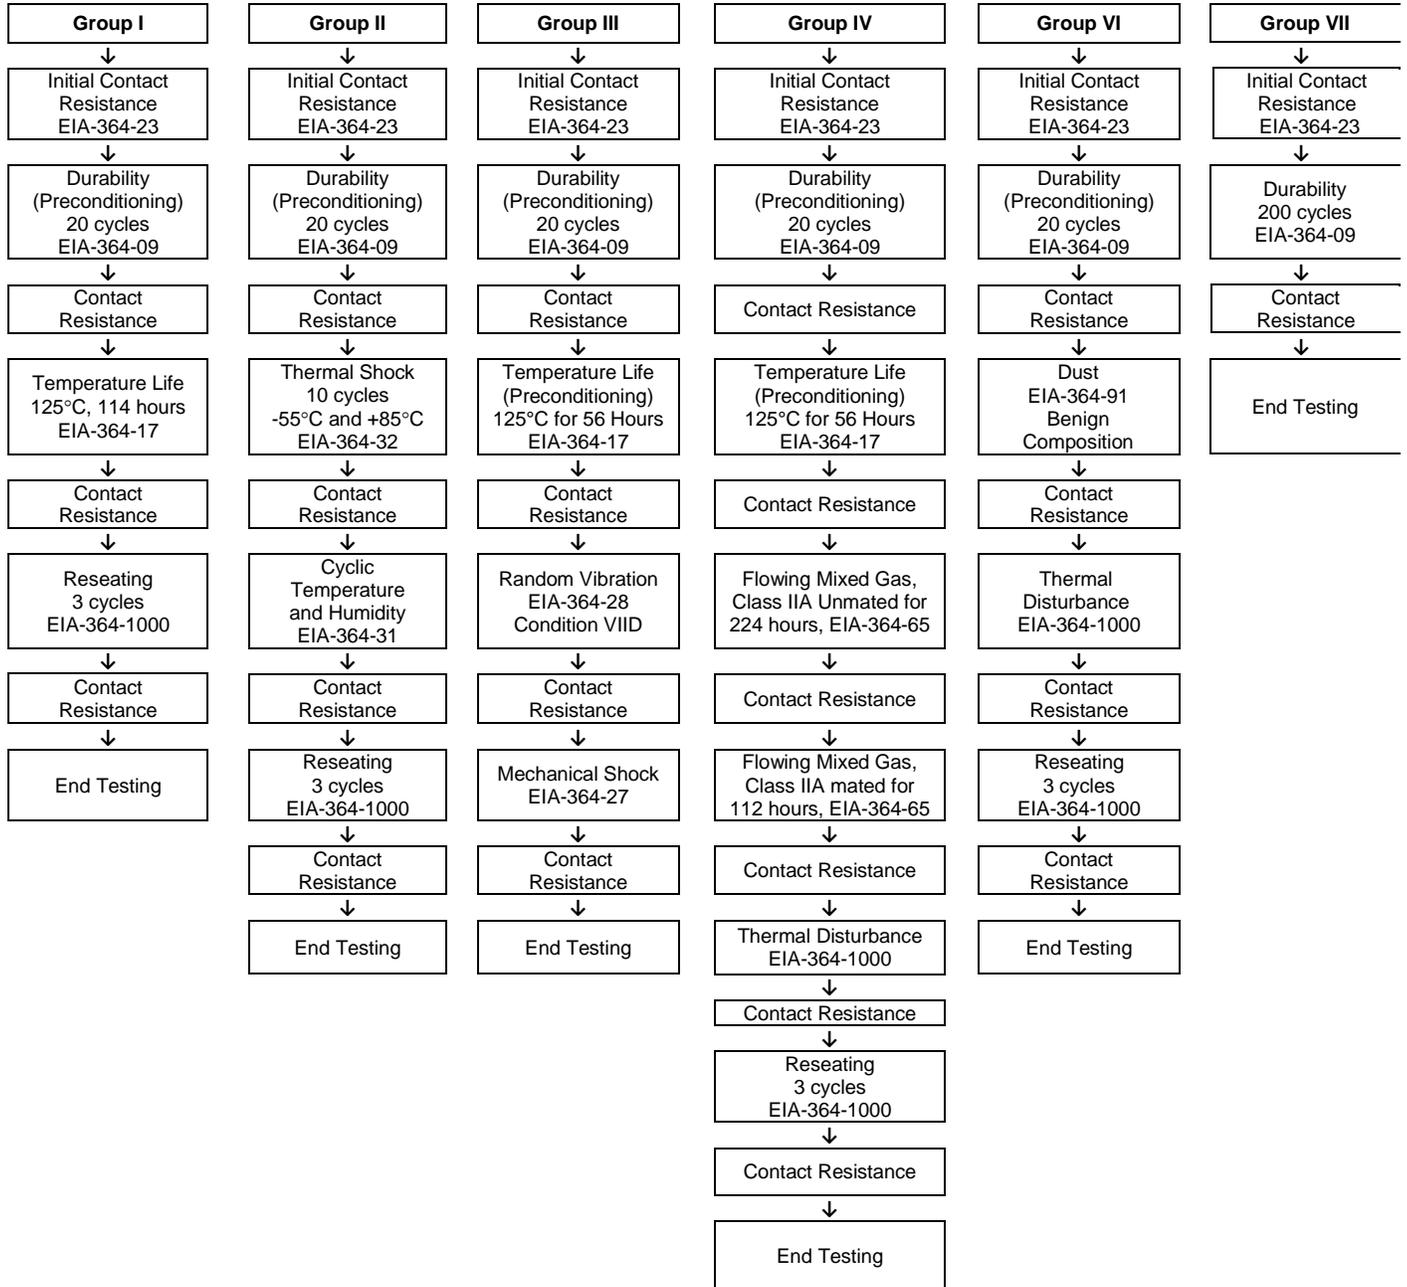


**SENTRALITY PIN AND SOCKET INTERCONNECTS**

**TABLE OF CONTENTS**




REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>16 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A			

## 7.2 MECHANICAL TEST SEQUENCES

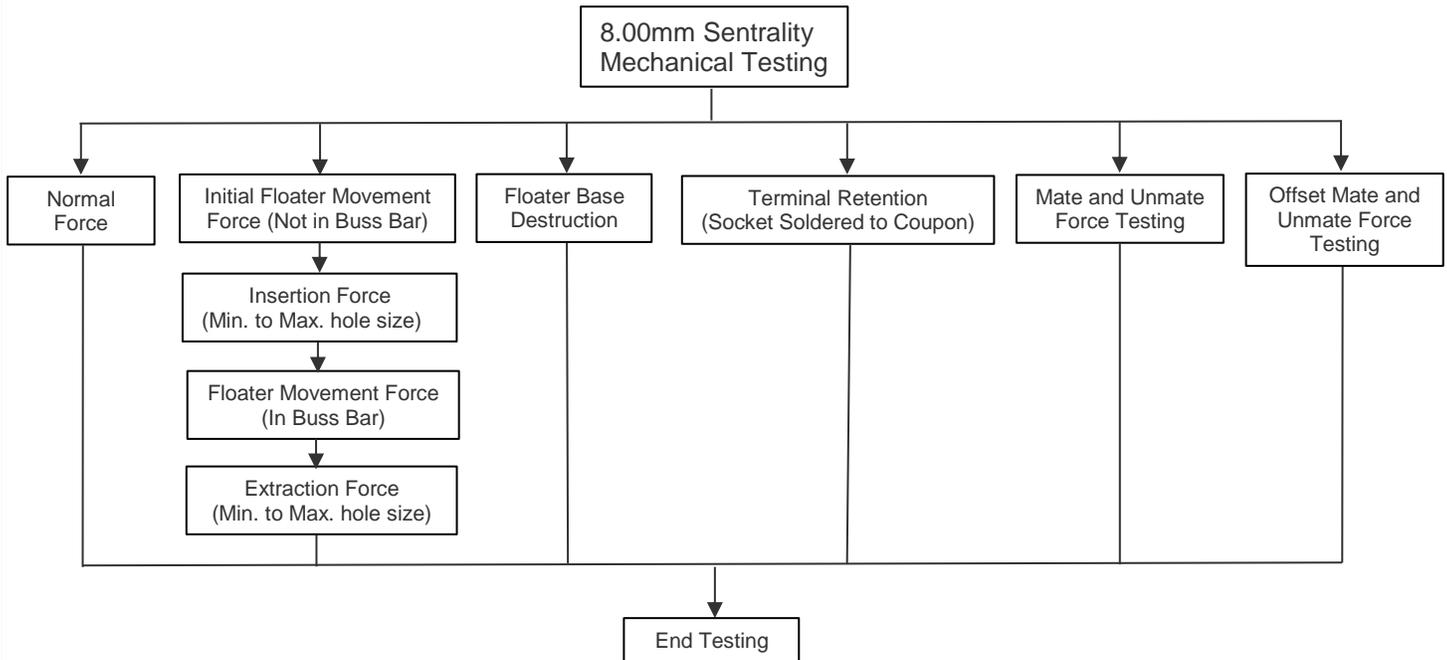

## 7.3 TEMPERATURE RISE TEST SEQUENCES

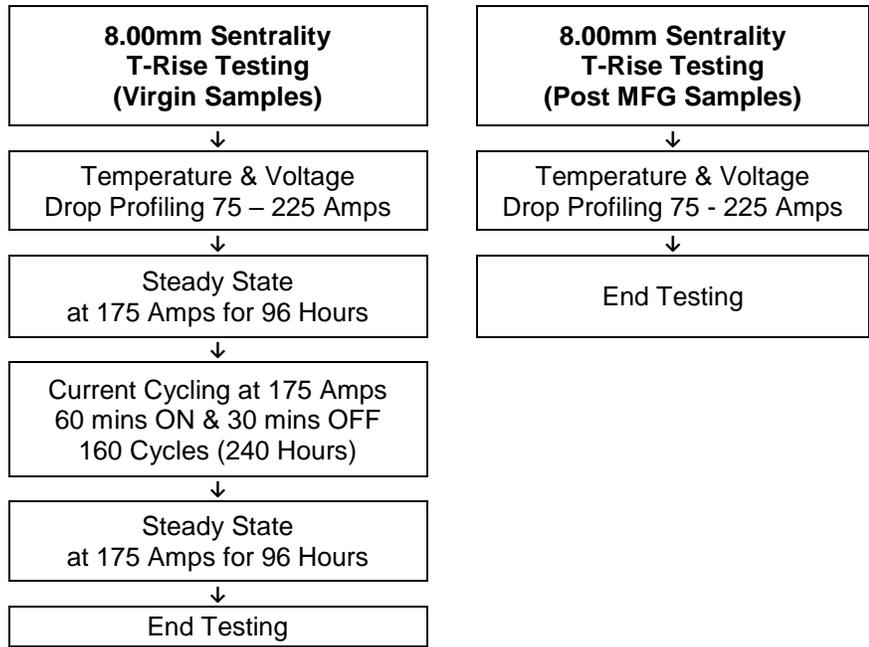

**[SENTRALITY PIN AND SOCKET INTERCONNECTS](#)**

**[TABLE OF CONTENTS](#)**



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>17 of 18</b>
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>
		CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A			

**8.0 PACKAGING**

Parts shall be packaging to protect the parts from damage during standard shipping, storage, and handling. Refer Molex.com specific part number webpage / Refer to table in the [section 3.1](#) to get the exact packaging document for that item.

**SENTRALITY PIN AND SOCKET  
INTERCONNECTS**

**TABLE OF CONTENTS**



REVISION: <b>C1</b>	ECM INFORMATION: EC No: <b>794315</b> DATE: <b>2024/08/14</b>	TITLE: <b>PRODUCT SPECIFICATION 8.00MM COEUR SENTRALITY</b>	SHEET No. <b>18 of 18</b>		
DOCUMENT NUMBER: <b>2043130001-PS</b>	DOC TYPE: <b>PS</b>	DOC PART: <b>000</b>	CREATED / REVISED BY: <b>SOURAJ</b>	CHECKED BY: <b>SCS02</b>	APPROVED BY: <b>HTHYAGARAJ</b>
TEMPLATE FILENAME: 1703070003 REV A					