




Terminals & Splices > Quick Disconnects

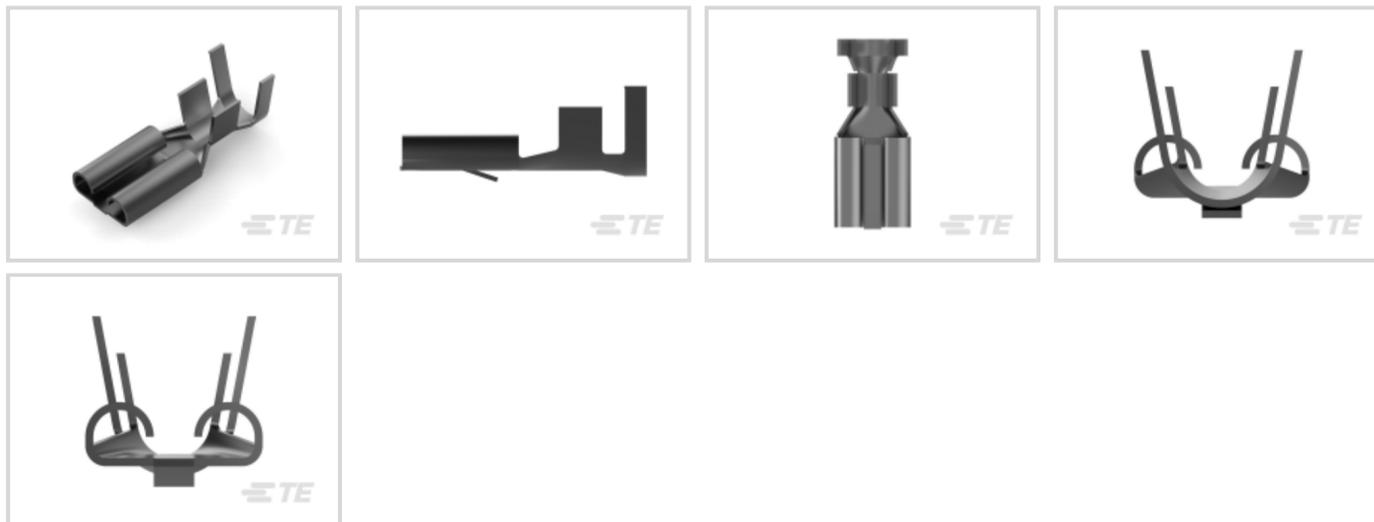

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **6 – 10 mm²**

Mating Tab Width: **9.53 mm [.375 in]**

Mating Tab Thickness: **1.22 mm [.048 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Electrical Characteristics

Voltage Rating	250 V
----------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	9.53 mm [.375 in]
Mating Tab Thickness	1.22 mm [.048 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.25 mm
----------------------	---------

Wire Insulation Support	With
-------------------------	------

Mating Retention Type	Locking Lance
-----------------------	---------------

Dimensions

Product Length	29 mm[1.14 in]
----------------	----------------

Compatible Insulation Diameter Range	5 – 7 mm[.197 – .276 in]
--------------------------------------	--------------------------

Terminal Material Thickness	.51 mm[.02 in]
-----------------------------	----------------

Wire Size	6 – 10 mm ²
-----------	------------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	1000
--------------------	------

Packaging Method	Strip/Reel
------------------	------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
-----------------------------------------------	-----------------------------------------

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
----------------------------------------	---------------------------------------------------------------------------------------------------------------------------------

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	----------------------------------------------------------------------------------



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 2150321-2
OCEAN_2.0_Applicator-E-180F300F-REA



TE Part # 7-2150321-7
OCEAN_2.0_SPARE_PART_KIT-180F300F



TE Part # 880003-4
FF 375 REC 2.5-4.0 MM2 .508X25.65 TPPHBZ



TE Part # 151667-2
FF 375 REC 4-6MM2 TPBR




TE Part # 280074-2
FF 375 TAB 6-10MM2 PTBR



TE Part # 63580-1
FF 125 REC 22-18AWG TPBR

Also in the Series | FASTIN-FASTON 375



Crimp Terminal Housings(7)



Insertion & Extraction Tools(1)



Quick Disconnects(16)

Customers Also Bought



TE Part #SM1-25
STRING POT, 25 INCH RANGE



TE Part #2-34167-1
TERMINAL, PG SPD 16-14 10



TE Part #53247-1
TERMINAL, PG SPR SPD 12-10 8



TE Part #180351-2
FF 250 REC 4-6MM2 PTBR



TE Part #281852-2
PL 250 REC HSG 4P NYLON BLACK



TE Part #350783-1
12P UMNL CAP HSG



TE Part #1-770246-0
UMNL II PIN AUNIPHBZ LP 12-10



TE Part #1-770247-0
UMNL II SOK SN/AUNI/PHBZ LP



TE Part #2-2176343-0
CRGCO 1206 390R 1%



TE Part #3-2176412-2
5W XSM M/OX 5% 100R

Documents

Product Drawings

[FF 375 REC 6-10MM2 TPBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_280755-2_L_c-280755-2-l.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_280755-2_L_c-280755-2-l.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_280755-2_L_c-280755-2-l.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications

Application Specification

English