

41531 ✓ ACTIVE

FASTON | FASTON 250

TE Internal #: 41531

Quick Disconnect Receptacle, Uninsulated, 18 – 12 AWG, .82 – 3.31 mm² Wire, 6.35 mm [.25 in] Tab Width, Tab-Lok, Flag, Brass, FASTON 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .82 – 3.31 mm²

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
--------------------------------	------------

Mating Tab Width	6.35 mm [.25 in]
------------------	------------------

Mating Tab Thickness	.81 mm [.032 in]
----------------------	------------------

Terminal Orientation	Flag
----------------------	------

Contact Base Material	Brass
-----------------------	-------

Terminal Plating Material	Unplated
---------------------------	----------

Crimp Type	Tab-Lok
------------	---------

Barrel Type	Open
-------------	------

Termination Features



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	17.02 mm[.67 in]
Compatible Insulation Diameter Range	2.79 – 5.33 mm[.11 – .21 in]
Terminal Material Thickness	.43 mm[.017 in]
Wire Size	.82 – 3.31 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	4000
Packaging Method	Strip/Reel

Other

Line	Premier
------	---------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1596697-5
HB APPL,AOM

TE Part # 2088156-2
MINI APPLICATOR, HINGE BAR END FEED

KIT
REPRESENTATION ONLY

TE Part # 7-1855041-7
SPARE PART KIT

TE Part # 1596696-2
HB APPL,AOL

TE Part # 1855041-1
HINDGE BAR F.A. EMPO160TAB1800 LM & G

TE Part # 2232111-2
250 FASTON,FLAG,REC.,12-20 AWG, BR

TE Part # 1852633-1
EAPOHB160TABLOCK1800 LM/G-HINGE BAR

Also in the Series | FASTON 250

Compression Connectors(4)

Crimp Terminal Housings(115)

Insertion & Extraction Tools(6)

Insulation Boots & Sleeves(16)



Magnet Wire Terminals(1)



PCB Terminals(133)



Quick Disconnects(418)



Splices(4)

Customers Also Bought



TE Part #40524
RING TERMINAL 12-10 AWG TPBR



TE Part #61765-1
FASTON ADAPTER .250 RECEPTACLE BR



TE Part #456422-2
CRIMPER WIRE .110 F



TE Part #521848-3
ULTRA-POD 250 ASSY REC 18-14 AWG BR




TE Part #551336-1
SHAFT-TRANSMISSION




TE Part #1742550-1
250 FASTON, TAB, 20-15 AWG, NPST



TE Part #1803716-2
CRIMPER, MODIFIED STANDARD APPLICATOR



TE Part #2217519-1
VALVE, CARTRIDGE

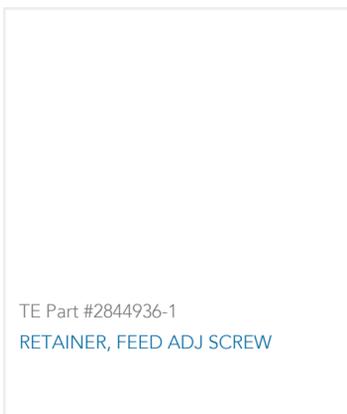

TE Part #2844936-1
RETAINER, FEED ADJ SCREW



TE Part #2844937-1
DETENT SPRING

Documents

Product Drawings

[250 FASTON FLAG REC 18-12 AWG BR](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_41531_DW.2d_dxf.zip](#)

English

[3D PDF](#)



3D

Customer View Model

[ENG_CVM_CVM_41531_DW.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_41531_DW.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[Agency Approval Document](#)

English