

41728 ✓ ACTIVE

FASTON | FASTON 250


TE Internal #: 41728

Quick Disconnect Receptacle, Uninsulated, 16 – 12 AWG, 1.31 – 3.31 mm<sup>2</sup> Wire, 6.35 mm [.25 in] Tab Width, F-Crimp, Straight, Brass, FASTON 250

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects

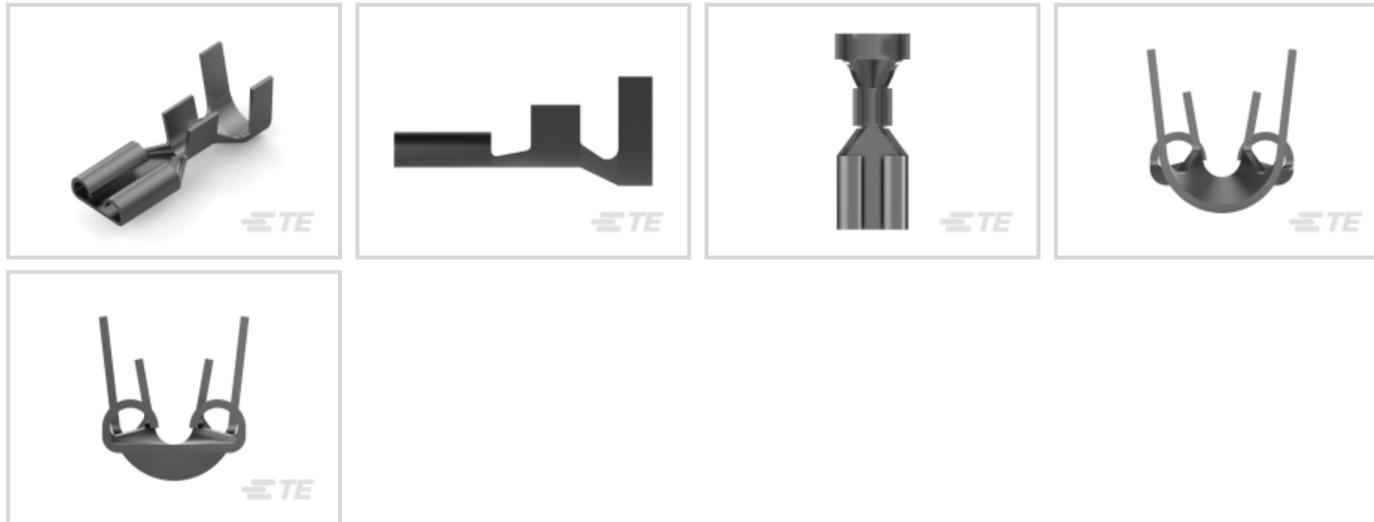

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: 1.31 – 3.31 mm<sup>2</sup>

Mating Tab Width: 6.35 mm [.25 in]

Mating Tab Thickness: .81 mm [.032 in]

## Features

### Product Type Features

Insertion Force	Normal
-----------------	--------

### Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

### Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

### Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

### Dimensions

Product Length	20.93 mm[.82 in]
Compatible Insulation Diameter Range	5.33 – 6.73 mm[.21 – .265 in]
Terminal Material Thickness	.43 mm[.017 in]
Wire Size	1.31 – 3.31 mm <sup>2</sup>

### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

### Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

### Packaging Features

Packaging Quantity	6000
Packaging Method	Strip/Reel

### Other

Line	Premier
------	---------

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # 2376595-2  
250 FASTON PCB TAB TPBR



**KIT**  
REPRESENTATION ONLY

TE Part # 7-2150550-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-140F300F



TE Part # 2150550-2  
OCEAN\_2.0\_Applicator-E-140F300F-REA

### Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(115)



Insertion & Extraction Tools(6)



Insulation Boots & Sleeves(16)



Magnet Wire Terminals(1)



PCB Terminals(133)



Quick Disconnects(418)




Splices(4)

### Customers Also Bought



TE Part #63445-4  
250 FASTON FLAG REC 18-12 AWG  
TPBR



TE Part #63537-2  
250 FASTON REC 18-14 TPBR



TE Part #63677-1  
312 FASTON REC 16-12 AWG TPBR



TE Part #5-179464-1  
POWER DBL LOCK CAP HSG F/H 3P  
(GWT)



TE Part #368572-6  
PDL 3P CAP 3.96 F/H(GWT) BLU



TE Part #2-1743068-1  
187 HSG. PL MKII REC. 5mm 3P NAT



TE Part #1743729-1  
FG TERMINAL



TE Part #2232112-1  
250 FASTON, REC., 18-14 AWG, TPBR



TE Part #2-1743216-1  
GAS VALVE 2P HSG GWT



TE Part #2-1743217-1  
GAS VALVE 3P HSG GWT

## Documents

### Product Drawings

[250 FASTON REC 16-12 AWG TPBR](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_41728\\_BG.2d\\_dxf.zip](#)

English

### 3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_41728\\_BG.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_41728\\_BG.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Datasheets & Catalog Pages



[FASTIN\\_FASTON\\_Product\\_Line](#)

English

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

---

[Product Specifications](#)

[Engineering Report](#)

English

---

[Agency Approvals](#)

[Agency Approval Document](#)

English