




Terminals & Splices > Quick Disconnects

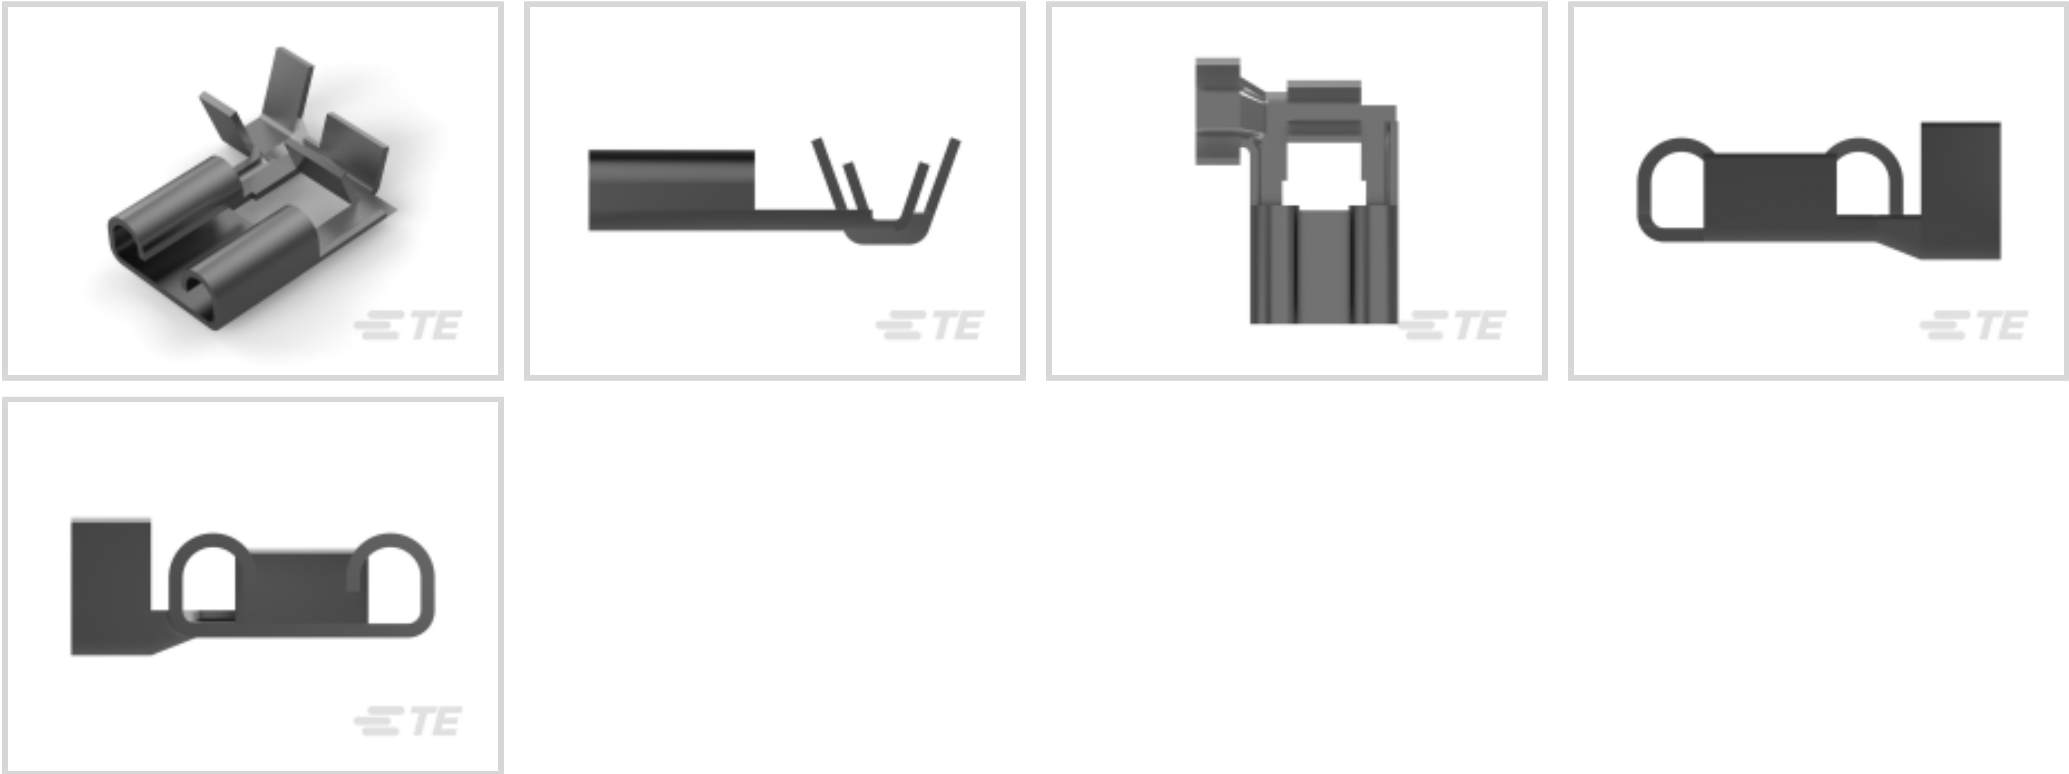

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.32 – .82 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Flag
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	13.72 mm[.54 in]
Compatible Insulation Diameter Range	1.52 – 2.54 mm[.06 – .1 in]
Terminal Material Thickness	.41 mm[.016 in]
Wire Size	.32 – .82 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	11000
Packaging Method	Strip/Reel

Other

Line	Budget
------	--------

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

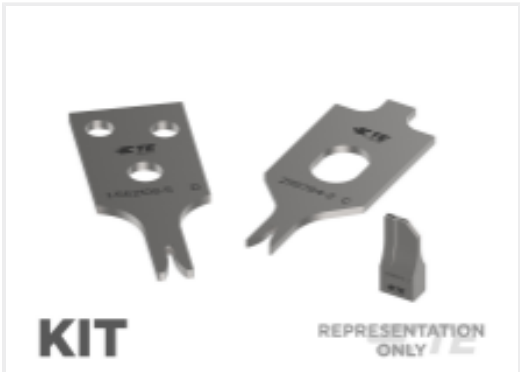

KIT

TE Part # 7-2150131-7
[OCEAN_2.0_SPARE_PART_KIT-090F140F](#)




TE Part # 2150131-1
[OCEAN_2.0_Applicator-E-090F140F-SEM](#)



TE Part # 2150131-2
[OCEAN_2.0_Applicator-E-090F140F-SEA](#)



TE Part # 626089-1
[250 FASTON FLAG REC 22-18 AWG BR](#)

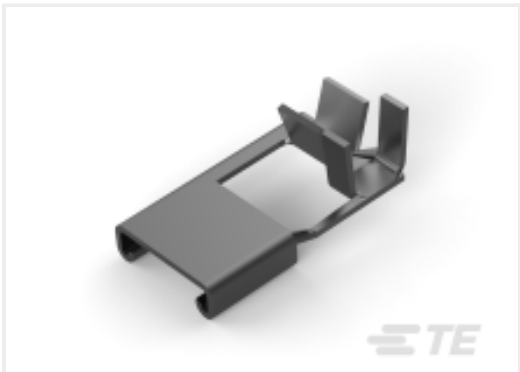


TE Part # 62418-2
[250 FASTON FLAG REC 22-16 AWG TPBR](#)

Also in the Series | FASTON 250



[Compression Connectors\(4\)](#)

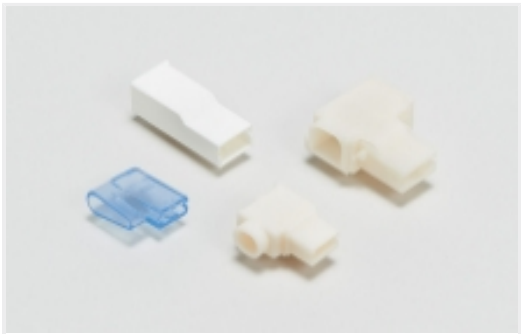


[Crimp Terminal Housings\(115\)](#)



[Insertion & Extraction Tools\(6\)](#)



[Insulation Boots & Sleeves\(16\)](#)

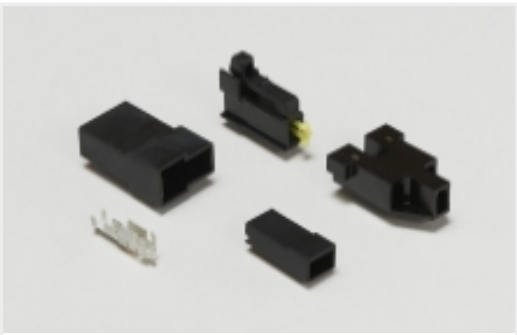

Magnet Wire Terminals(1)



PCB Terminals(133)



Quick Disconnects(418)



Splices(4)

Customers Also Bought

TE Part #L9000077-01
ANTENNA IND DIPOLE 2.4GHZ RG58 2M RPS

TE Part #FTRA6171M6PWN-001
OMNI,PH,PMT,617-7125MHz

TE Part #ANT-W63WS1-RPS
Antenna Blade Wifi6/6E Swivel RPS

TE Part #40960
RING TERMINAL 14-12 AWG TPBR

TE Part #62814-2
250 FASTON FLAG REC 22-18 AWG TPBR

TE Part #2-520306-2
ULTRA-FAST .110/.125 ASY REC 22-18 TPBR

TE Part #1376394-1
5MM POWER KEY D/L PLATE GREEN

TE Part #8-1879497-5
CRGH1206 5% 3K3 0.5W

TE Part #9-1879497-7
CRGH1206 5% 10K 0.5W

TE Part #1969657-1
250 FASTON HSG.,FLAG,REC.,1 POS, BLACK

Documents

Product Drawings
250 FASTON FLAG REC 22-18 AWG TPBR
English

CAD Files
Customer View Model
ENG_CVM_CVM_62718-2_Z.2d_dxf.zip
English
3D PDF



3D

Customer View Model

[ENG_CVM_CVM_62718-2_Z.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_62718-2_Z.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

Product Specifications

[Engineering Report](#)

English

Agency Approvals

[UL Report](#)

English