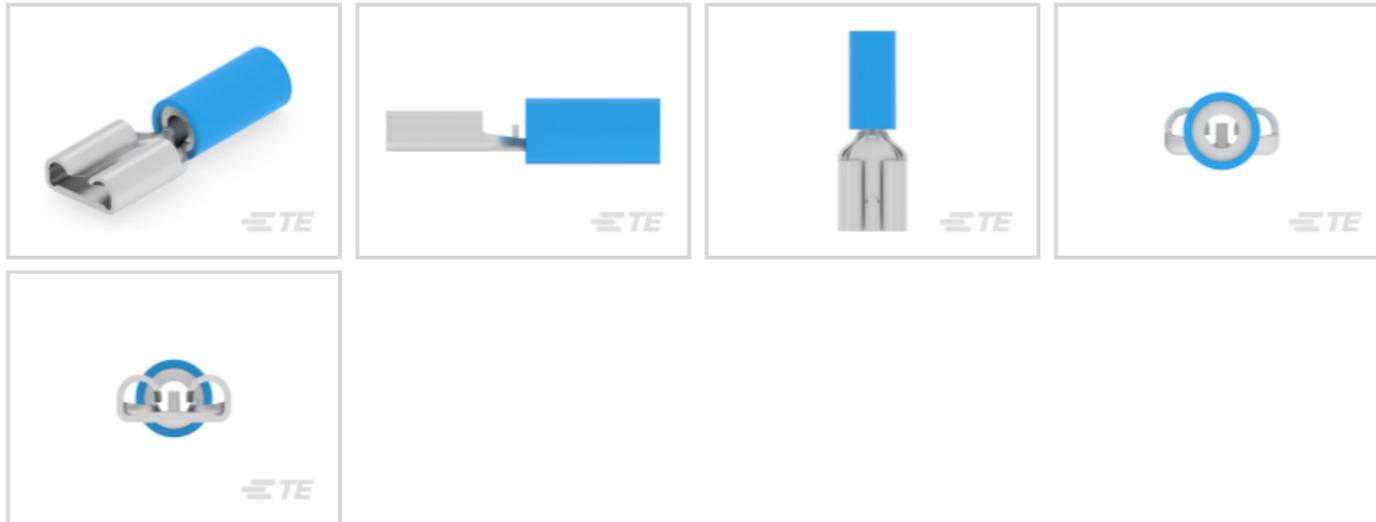




Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **2050 – 5180 CMA**

Mating Tab Width: **6.35 mm [.25 in]**

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Terminal Features	Wire Stop
Insertion Force	Normal

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Electrical Characteristics

Voltage Rating	300 V
----------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight



Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	Compression Crimp
Barrel Type	Closed

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	22.86 mm[.9 in]
Compatible Insulation Diameter Range	4.32 mm[.17 in]
Terminal Material Thickness	.46 mm[.018 in]
Wire Size	2050 – 5180 CMA

Usage Conditions

Insulation Option	Partially Insulated
-------------------	---------------------

Industry Standards

Compatible With Agency/Standards Products	CSA, RU (UL Component Program)
---	--------------------------------

Packaging Features

Packaging Quantity	3500
Packaging Method	Reel

Other

Barrel Color	Blue
--------------	------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250)



Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



REPRESENTATION ONLY

TE Part # 90009-8
DAHT PIDG FASTON 16-14 ASSY



REPRESENTATION ONLY

TE Part # 47387-7
DAHT PG PIDG 16-12 ASSY



TE Part # 58423-1
DIE, RBY IS9252




TE Part # 58433-3
PRO CR ASSY, RBY IS9252

Also in the Series | FASTON 250



Compression Connectors(4)



Crimp Terminal Housings(115)



Insulation Boots & Sleeves(16)



Magnet Wire Terminals(1)



PCB Terminals(133)






Quick Disconnects(418)



Splices(4)

Customers Also Bought

TE Part #520206P036
RT-3-NO.1-0-1INTE Part #505874P042
VERSAFIT-1/4-0-0.9375INTE Part #CV4186-000
RNF-100-1/4-BK-SP-SHTE Part #803785-SF
FN9222SB-15-06TE Part #42844-3
RECEPT,PIDG FASTON 14-12 250TE Part #320856
TERMINAL,SOLIS SPD FLG 16-14 8TE Part #2-320861-1
TERMINAL,PIDG SPD FLG 16-14 6TE Part #3-640604-8
08P MTA156 CONN ASSY 18AWG LFTE Part #640929-2
RECEPT,PIDG FASTON 16-14 110TE Part #1811027-2
ASSEMBLY,18AWG TAP

Documents

Product Drawings

[RECEPT,PIDG FASTON 16-14 250](#)

English

CAD Files

[3D PDF](#)

English

Customer View Model

[ENG_CVM_640905-2_N1.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_640905-2_N1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_640905-2_N1.3d_stp.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_640905-2_N.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_640905-2_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_640905-2_N.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PIDG_FASTON](#)

English

[Ultra-Fast and Ultra Fast Plus](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

Agency Approvals

[UL Report](#)

English