
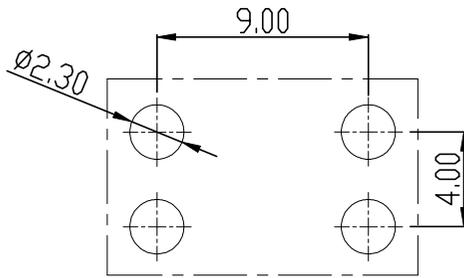

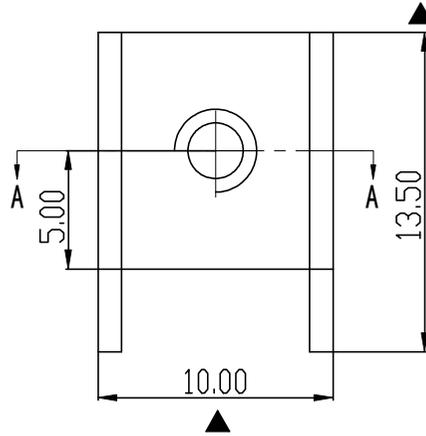
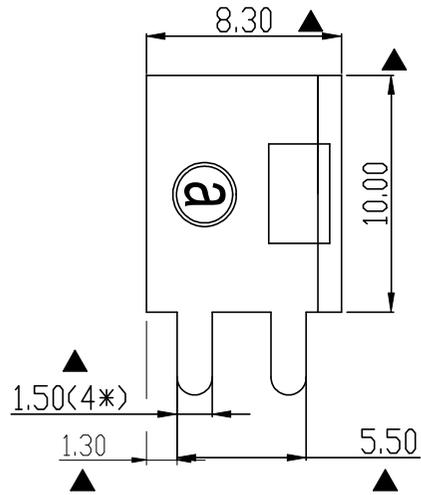


RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
A0		2023.10.20		Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

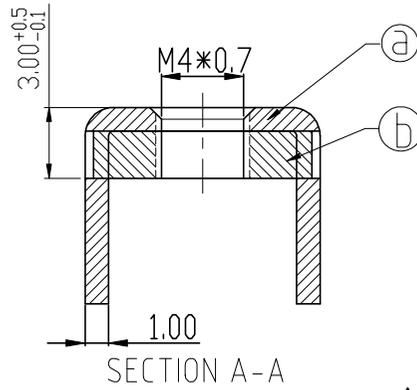

PCB LAYOUT

Technical Specification:

1. Current: 40A.
2. Torque: 13 lbf.in.
3. Mark "▲" is the Critical dimension.

(b)	Spacer	Steel , Matte Tin Plated	1PCS
(a)	terminal	Copper alloy, Matte Tin Plated	1PCS
ITEM	PART NAME	DESCRIPTION	Q`ty

Amphenol ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		AMT44012DB terminal					
PART NO.		AMT0440012DB0000G			DWG NO.		8AMT0014
APPROVED		CHECKED		DESIGNED		DRAWN	
				Guoxue 2023.10.20		Guoxue 2023.10.20	
						UNIT: mm SCALE: NONE REV.: A0	
				SHEET: 01/01		Tolerance >30 ±0.60 6-30 ±0.40 0-6 ±0.30 ANGLES ±1°	