



Automotive Parts > Automotive Connector Accessories > Other Automotive Connector Accessories > Charging Inlets Flap Assembly



Primary Product Color: **Black**
Primary Product Material: **PBT**
Automotive Connector Accessory Type: **Flap**
Operating Temperature Range: **-40 – 85 °C [-40 – 185 °F]**

[All Charging Inlets Flap Assembly \(8\)](#)

Features

Product Type Features

Automotive Connector Accessory Type	Flap
-------------------------------------	------

Body Features

Primary Product Color	Black
Primary Product Material	PBT

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Industry Standards

Compatible With Agency/Standards Products	DIN
UL Flammability Rating	UL 94HB

Packaging Features

Packaging Method	Box
Packaging Quantity	60

Other

Serviceable	No
-------------	----



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2415865-1
INLET HSG LARGER AC, CCS2 ASSY, WITH LED



TE Part # 2401362-2
INLET HSG, CCS2 ASSY, WITH LED



TE Part # CAT-AQ6-HPCI
High-Power Charging CCS1 and CCS2 Inlet Kits



TE Part # CAT-AQ6-CIC
DC Fast Charge CCS1 and CCS2 Inlet Kits

Customers Also Bought


2358664-6

Black, PBT, Flap, -40 – 85 °C [-40 – 185 °F]







TE Part #DT04-3P-EP10
REC, 3P, BLK, 120 OHM RESISTOR

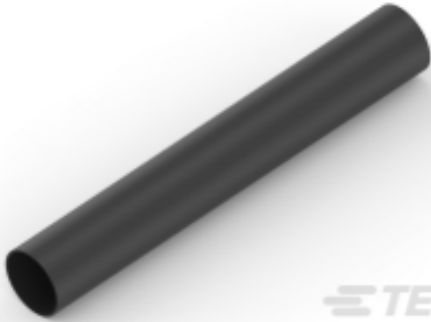


TE Part #NB10746001
ATUM-32/8-0-85MM



TE Part #185636-1
PROTECT CAP 2.5MM PLUG

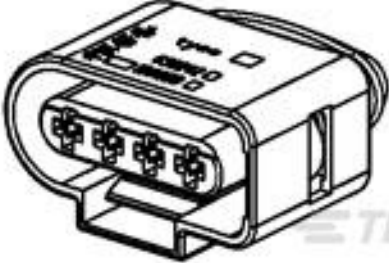

TE Part #638245-1
RECEPTACLE ASSY,4P SEALED,JPT



TE Part #1418985-2
FRAME FOR MICRO TIMER 3 REC.
HSG. 16 POS



TE Part #1564562-1
SLIDE,TAB HSG GROUP D



TE Part #2112303-1
PROTECTION CAP, FOR REC.HSG
GROUP E



TE Part #2348651-1
BLIND PLUG SEALED, MATENET,
ASSY



TE Part #2388502-1
CHARGE INLET, COMBO 2, LED, 90
DEGREE



TE Part #1-1414939-4
V23130C2021A412-EV-CBOX

Documents

Product Drawings

FLAP, ASSY, INLET COMBO 2, LEFT, LED

English

CAD Files

Customer View Model

ENG_CVM_CVM_2358664-6_B.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2358664-6_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2358664-6_B.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

2358664-6

Black, PBT, Flap, -40 – 85 °C [-40 – 185 °F]



ICT CHARGING INLET FLAP ASSEMBLIES

English