
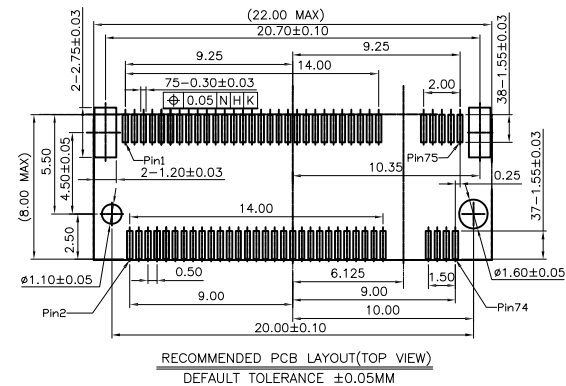
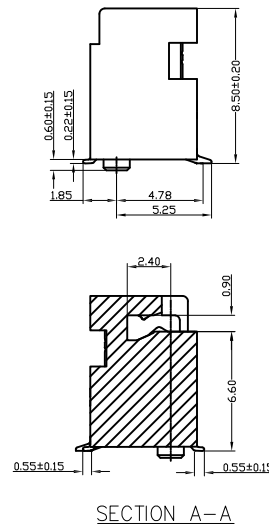


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/21	
A		ADDED PACKING	12/10/21	JJ/RC
B		UPDATE SPEC.	12/10/21	WX/RC

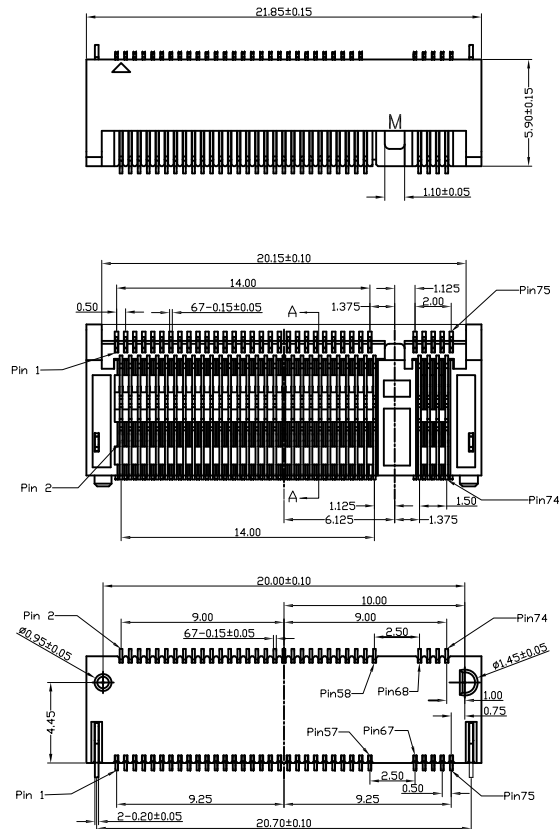

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator Color: Black

Contacts: Brass

SMT tab: Nickel Plated

Solder area: Matte Tin plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 50V AC/DC

Current rating: 0.5A per pin

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 200 VAC for 1 minute

Mechanical:

PCB Thickness: 0.8mm

Durability: 25-60 cycles

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

	MM	ANGLE
.X	± .35	± 3°
.XX	± .20	

DRAWN	WX	11/17/21
CHECKED	TL	11/17/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
M.2 CONNECTOR, 67PINS, SMT TYPE,
8.50 HEIGHT, CUSTOM KEY, TAPE REEL

SIZE X	PART NO. M2-J-67-R-SMT-8.50-KM-T/R	REV. B
REF: S00059T	SCALE: NTS	SHEET 1 OF 2

