

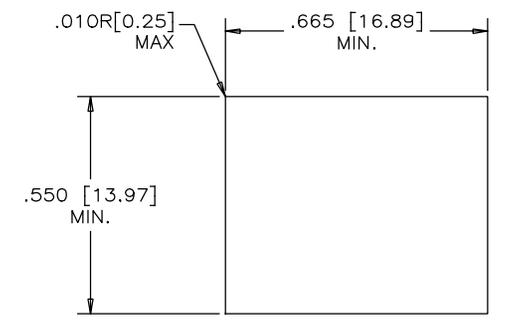
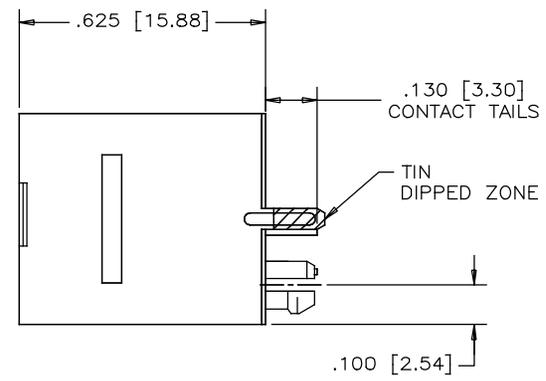


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR08/18	L.CHAN

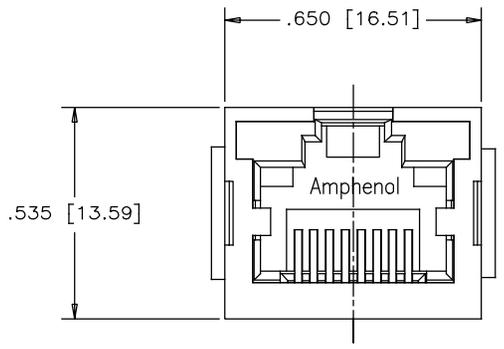

RECOMMENDED PANEL CUTOUT

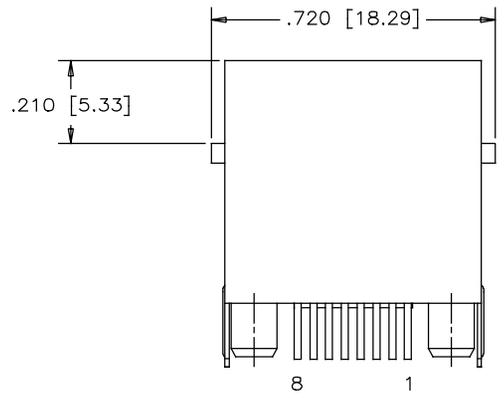

**MATERIALS:**

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
FLAMMABILITY RATING UL 94V-0, COLOR: BLACK

**CONTACTS:**

PHOSPHOR BRONZE  
PLATING: 30 μ" [0.76 MICRONS]  
MIN. GOLD ON MATING SURFACES.  
50 μ" [1.27 MICRONS]  
MIN. NICKEL UNDERPLATE  
100 μ" [2.54 MICRONS]  
MIN. MATTE TIN ON CONTACT TAILS.


**SHIELD:**

STAINLESS STEEL WITH TIN DIPPED ON SOLDER TAILS.

**RECOMMENDED SOLDERING TEMPERATURE:**

WAVE SOLDERING TEMPERATURE AT 260°C MAXIMUM  
FOR 5 SEC MAXIMUM.

AMPHENOL PART NUMBER: RJHSE-3380-A1

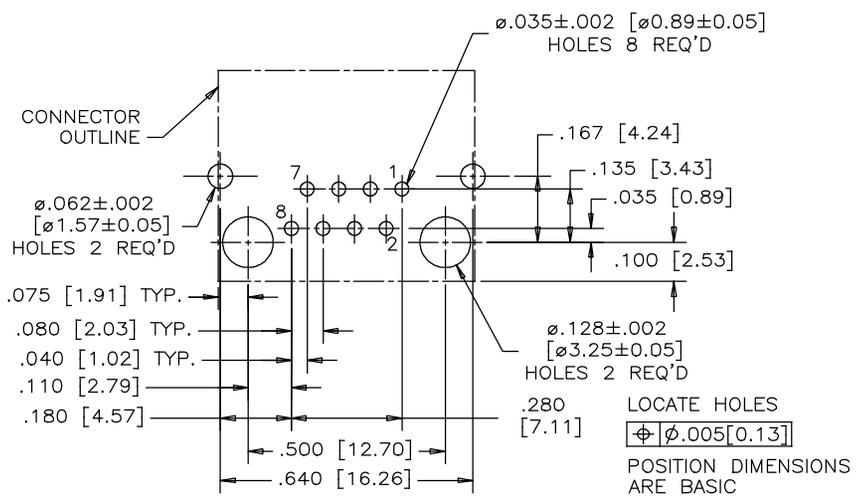

RECOMMENDED P.C.B. LAYOUT  
(COMPONENT SIDE OF BOARD)

UNLESS SPECIFIED OTHERWISE	DRAWN	W.QIU	DATE
PRIMARY UNITS INCH	CHECKED	L.CHAN	MAR08/18
SECONDARY MILLIMETER	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES	DWG APPR.		
1 DECIMAL PLACE ±0.025	ENG. REL. NO.		
2 DECIMAL PLACES ±0.020	REF.		
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION		
ANGULAR DEGREES ±1.0°	DO NOT SCALE DRAWING		

<b>Amphenol Canada Corp.</b> www.amphenolcanada.com	
TITLE	VERTICAL SINGLE PORT MODULAR JACK CONNECTOR, SHIELDED WITHOUT LEADS .130" LONG CONTACT TAILS- RoHS COMPLIANT
DWG. NO.	P-RJHSE-3380-A1
REV	A
CODE ID NO.	03554
DWG SIZE:	C
SCALE:	N/A
SHEET	1 OF 1