
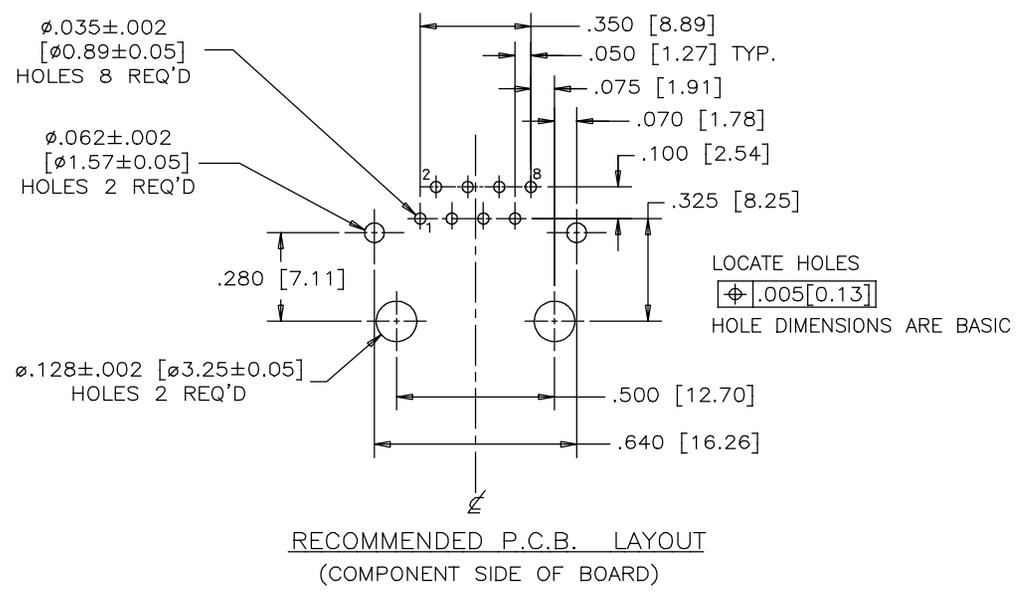
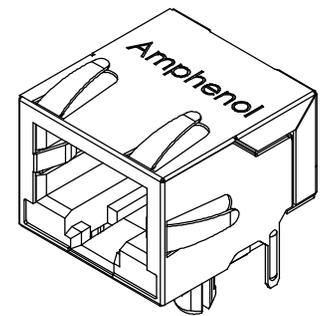
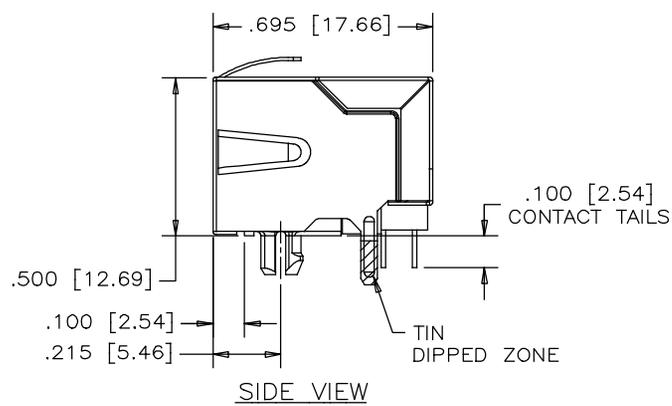



REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP 25/17	L.CHAN

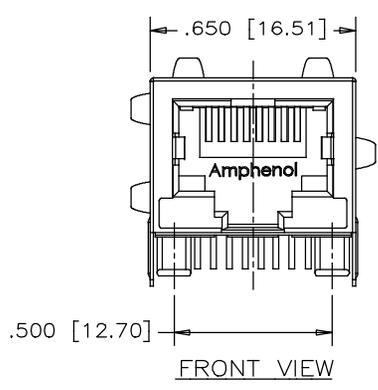

- 1. MATERIALS:**
- CONTACTS:** PHOSPHOR BRONZE, PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES. SEE PART NO. FOR THICKNESS. 50 MICRO" MIN. NICKEL OVERALL. 100 MICRO" MIN. MATTE TIN OR GOLD FLASH ON TAILS.
- HOUSING:** ENGINEERING PLASTIC
COLOR - BLACK.
FLAMMABILITY RATING UL 94V-0
- SHIELD:** COPPER ALLOY
PLATING: NICKEL WITH TIN DIPPED PCB TAILS.

AMPHENOL PART NO.: RJSBE-X380-C1

- GOLD PLATING OPTION:
- D = 6u" GOLD PLATING
 - G = 15u" GOLD PLATING
 - J = 30u" GOLD PLATING
 - 5 = 50u" GOLD PLATING

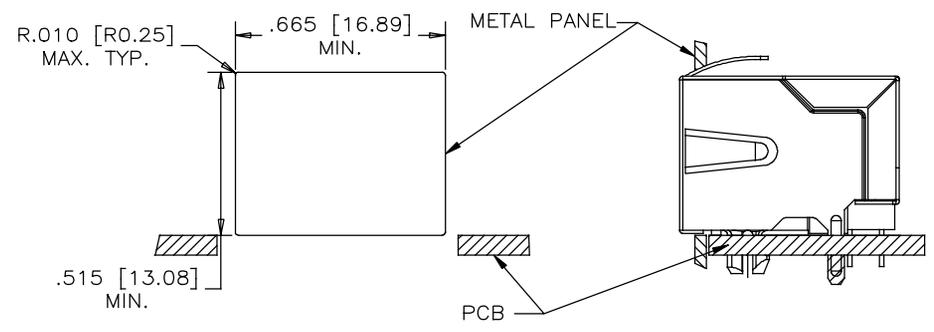

UNLESS SPECIFIED OTHERWISE	DRAWN	RONNIE.C	SEP 25/17	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCHES	CHECKED	AMY.Z	SEP 25/17	
SECONDARY MILLIMETERS	M.E. APP'D			TITLE
REFERENCE IN PARENTHESES	Q.A. APP'D			MODULAR JACK, 8 CONTACTS, WITHOUT LEDS SHIELDED, .050" CONTACT TAIL SPACING, WITH GOLD PLATING OPTION- RoHS COMPLIANT
1 DECIMAL PLACE	DWG APP'D			DWG NO.
2 DECIMAL PLACES	ENG. REL. NO.			P-RJSBE-X380-C1
3 DECIMAL PLACES ±0.015	REF.	EAR# RJ17172		REV
ANGULAR DEGREES ±1.5'	THIRD ANGLE PROJECTION			A
	DO NOT SCALE DRAWING			CODE ID NO. 03554 DWG SIZE SCALE SHEET 1 OF 1