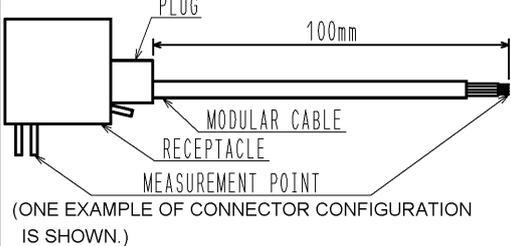


Aug. 1. 2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved. In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

APPLICABLE STANDARD		ANSI/TIA/EIA-568-B.2.10 CAT6a			
RATING	OPERATING TEMPERATURE RANGE	① -25 °C TO 60 °C	STORAGE TEMPERATURE RANGE	-25 °C TO 60 °C	
	VOLTAGE	125 V AC	OPERATING HUMIDITY RANGE	95 % MAX	
	CURRENT	1 A	APPLICABLE CABLE	AWG# 24 ~ AWG# 27	
<b>SPECIFICATIONS</b>					
ITEM	TEST METHOD		REQUIREMENTS	QT	AT
<b>CONSTRUCTION</b>					
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	X	X
MARKING	CONFIRMED VISUALLY.			X	X
<b>ELECTRIC CHARACTERISTICS</b>					
CONTACT RESISTANCE	100 mA (DC OR 1000 Hz AC).  (ONE EXAMPLE OF CONNECTOR CONFIGURATION IS SHOWN.)		50 mΩ MAX. (WITHOUT BULK RESISTANCE OF CABLE) ②	X	X
INSULATION RESISTANCE	100 V DC.		100 MΩ MIN.	X	X
VOLTAGE PROOF	500 V AC FOR 1 min.		NO FLASHOVER OR BREAKDOWN.	X	X
<b>MECHANICAL CHARACTERISTICS</b>					
MECHANICAL OPERATION	200 TIMES INSERTIONS AND EXTRACTIONS. ②		1) CONTACT RESISTANCE: 70 mΩ MAX. (WITHOUT BULK RESISTANCE OF CABLE) 2) NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—
VIBRATION	FREQUENCY 10 TO 55Hz, SINGLE AMPLITUDE 0.75 mm, AT 2h, FOR 3 DIRECTIONS. ②		1) NO ELECTRICAL DISCONTINUITY OF 1 μs. 2) CONTACT RESISTANCE: 70 mΩ MAX. (WITHOUT BULK RESISTANCE OF CABLE)	X	—
SHOCK	490 m/s <sup>2</sup> DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 6 DIRECTIONS.		3) NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—
<b>ENVIRONMENTAL CHARACTERISTICS</b>					
DAMP HEAT (STEADY STATE)	EXPOSED AT 40 °C, 90 TO 95 %, 500h. ②		1) CONTACT RESISTANCE: 70 mΩ MAX. (WITHOUT BULK RESISTANCE OF CABLE) 2) INSULATION RESISTANCE: 1 MΩ MIN.(AT HIGH HUMIDITY) 10MΩ MIN.(AT DRY) 3) NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—
RAPID CHANGE OF TEMPERATURE	TEMPERATURE: -55 → 15 TO 35 → 85 → 15 TO 35 °C TIME: 30 → 2 TO 3 → 30 → 2 TO 3 min. UNDER 5 CYCLES. ②		1) CONTACT RESISTANCE: 70 mΩ MAX. (WITHOUT BULK RESISTANCE OF CABLE) 2) INSULATION RESISTANCE: 100 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—
CORROSION SALT MIST	EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h. ②		1) CONTACT RESISTANCE: 70 mΩ MAX. (WITHOUT BULK RESISTANCE OF CABLE) 2) NO DAMAGE, CRACK AND LOOSENESS, OF PARTS.	X	—
<p>① THE OPERATION TEMPERATURE INCLUDES THE TEMPERATURE RISE BY CURRENT CARRYING.</p> <p>② TEMPERATURE RANGE FOR A CONNECTOR UNMATED.</p> <p>③ USE UNDER THE CONDITION RECOMMENDED BY A CABLE MANUFACTURE.</p>					
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
△	6	DIS-E-004367	SG. CHAMURA	EJ. WAKATSUKI	12. 09. 24
REMARK			APPROVED	YH. ENAMI	09. 01. 26
			CHECKED	YH. ENAMI	09. 01. 26
			DESIGNED	MT. ITANO	09. 01. 26
Unless otherwise specified, refer to JIS C 5402.			DRAWN	MT. ITANO	09. 01. 26
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-126868-00
<b>HRS</b>	SPECIFICATION SHEET		PART NO.	TM31P-TM-88P	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL222-4626-7-00	△ 1/1