


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	A	GTP(ECN-23-233095)	28SEP2023	ED WH

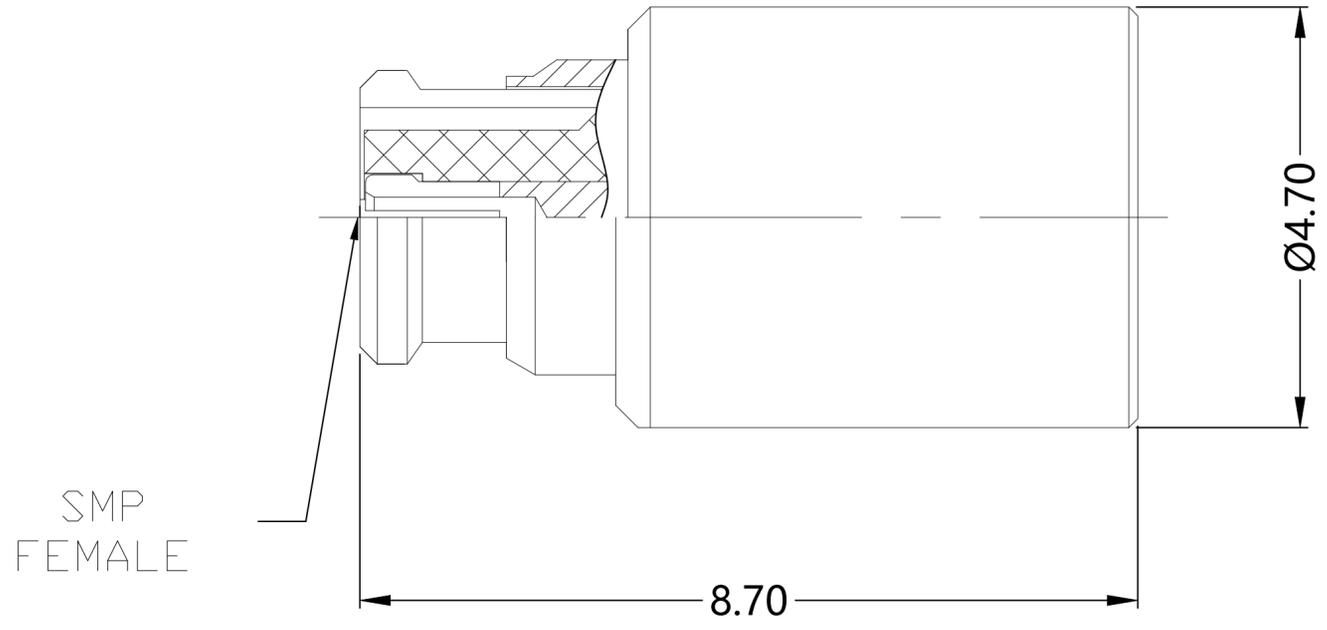

NOTES:

- 1 PACK IN ACCORDANCE WITH TE SPEC 107-3275;
- 2 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED;
- 3 ELECTRICAL CHARACTERISTICS :
 FREQUENCY RANGE : DC-18GHz
 NOMINAL IMPEDANCE : 50 OHMS
 POWER RATING: 1W
 VSWR : 1.25(DC-18GHz)
- 4 MECHANICAL CHARACTERISTICS :
 DURABILITY : 500 CYCLES
- 5 TEMPERATURE RANGE: -40°-+125°;
- 6 RoHS: COMPLIANT.

QUANTITY PER ASSY	DESCRIPTION	MATERIAL	DESCRIPTION	ITEM
1	GOLD 30u"/ NICKEL/COPPER	BERYLLIUM COPPER	OUTER CONTACT	4
1	GOLD 30u"/ NICKEL/COPPER	BERYLLIUM COPPER	CENTER CONTACT	3
1	NATURAL	PTFE	INSULATOR	2
1	GOLD 30u"/ NICKEL/COPPER	BRASS	BODY	1
2467917-1	PLATING	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ED 11JUL2023		
DIMENSIONS: mm		CHK ED 11JUL2023		
		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME SMP FEMALE TERMINATION, STRAIGHT, 18GHZ	
MATERIAL SEE TABLE		0 PLC ± 0.3 1 PLC ± 0.2 2 PLC ± 0.1 3 PLC ± - 4 PLC ± - ANGLES ± 5° FINISH -	APVD WH 11JUL2023	RESTRICTED TO -
		PRODUCT SPEC -	APPLICATION SPEC -	SIZE A2
		WEIGHT -	CAGE CODE 00779	DRAWING NO C=2467917
		CUSTOMER DRAWING	SCALE 8:1	SHEET 1 OF 1
			REV A	