

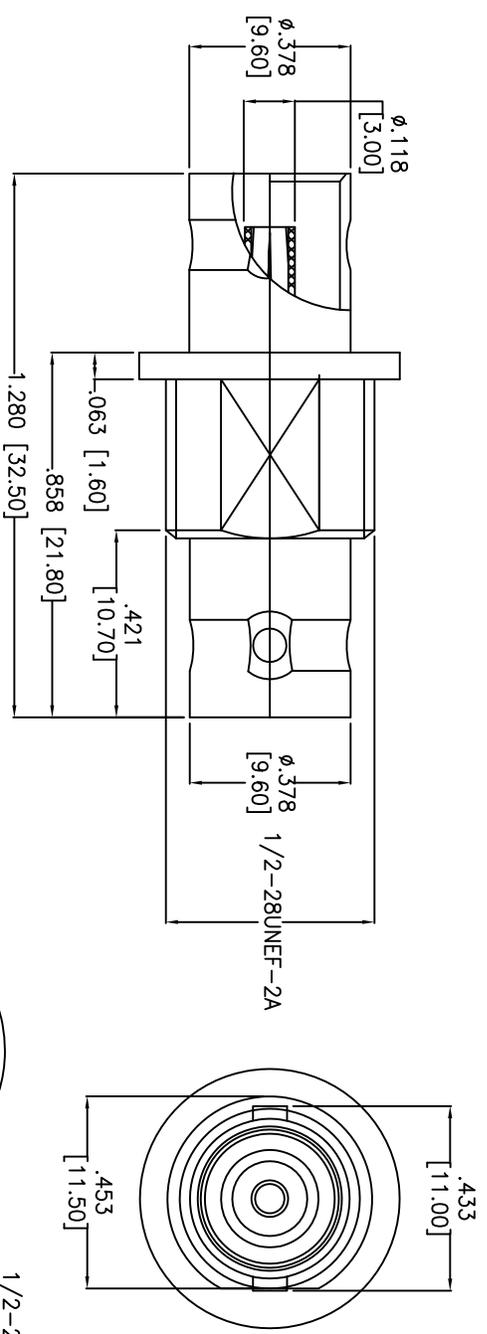


Rev	AWO #	Description	Date	Appr
-	10244	RELEASED	5/05/10	

APPROVED: _____
 DATE: _____ TITLE: _____

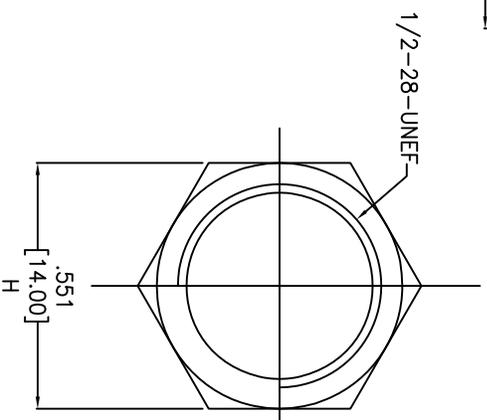

NUT	ZINC	NICKEL
LOCK WASHER	STEEL	NICKEL
WASHER	IRON	NICKEL
CENTER PIN	PHSPHOR BRONZE	GOLD
INSULATOR	POM	NONE
BODY	ZINC	NICKEL
DESCRIPTION	MATERIAL	FINISH

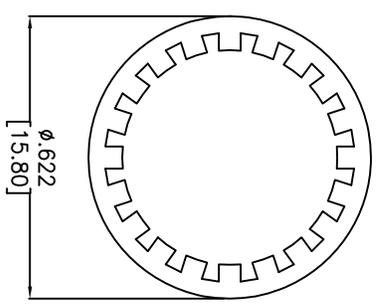

SPECIFICATIONS:

Electrical:
 Impedance: 75 ohms
 Frequency range: 0-4 GHz
 Working Voltage: 500 VRMS max.
 Dielectric Withstanding Voltage: 1500 VRMS min.
 Contact Resistance: 3 Milliohms max. (Center Contact)
 2 Milliohms max. (Outer Contact)
 Insulator Resistance: 5000 Megohms min.
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ±.10 Ø.X ±.10
 .XX ±.020 Ø.XXX ±.015
 .XXX ±.015 Ø.XXXX ±.010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

TITLE	SIZE	PART NO.	REV.
BNC DOUBLE FEMALE BULKHEAD ADAPTOR 75 OHM	X	RF1-44-DAS-75-HDW	-
REF: S00049T	SCALE: NTS	SHEET 1 OF 1	