


Data Sheet | Item Number: 216-141

Ferrule; Sleeve for 0.5 mm² / 20 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92

<https://www.wago.com/216-141>



Similar to illustration

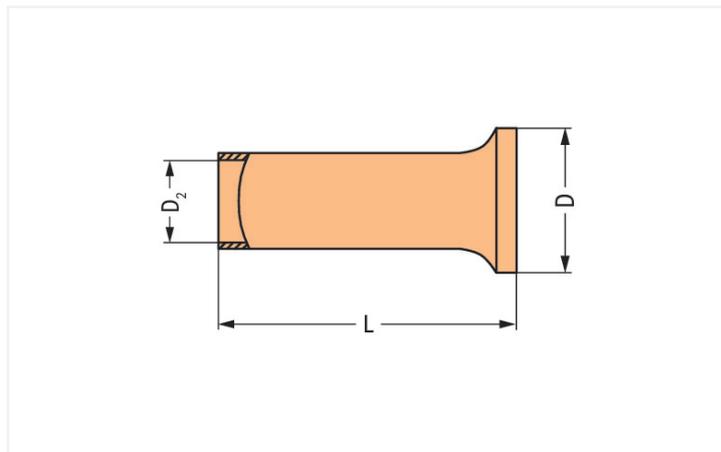

Dimensions in mm

Connection data

Cross-section metric	0.5 mm ²
Strip length	10 mm / 0.39 inches
Cross-section AWG	20 AWG

Physical data

Total length	10 mm
Wall thickness crimp sleeve	0.15 mm
Diameter crimp sleeve inside	1 mm

Mechanical data

Plastic collar	No
----------------	----

Material data

Fire load	0 MJ
Weight	0 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	5000 (1000) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918016353
Customs tariff number	85369010000

Product classification	
UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 8.0	EC000005
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 216-141	↓

Documentation

Bid Text			
216-141	19.02.2019	xml 2.87 KB	↓
216-141	13.06.2017	doc 23.00 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable