

Data Sheet | Item Number: 216-201


Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; acc. to DIN 46228, Part 4/09.90; white

<https://www.wago.com/216-201>



Color: ■ white

Similar to illustration

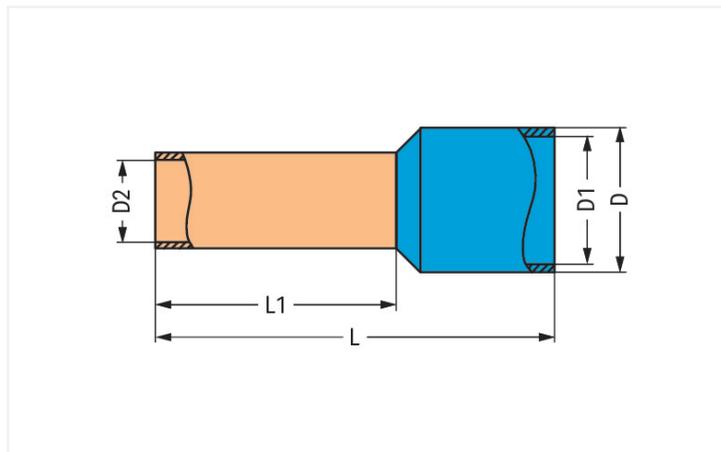

Dimensions in mm

Connection data

Cross-section metric	0.5 mm ²
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches
Cross-section AWG	20 AWG

Physical data

Wall thickness plastic collar	0.25 mm
Total length	14 mm
Wall thickness crimp sleeve	0.15 mm
Crimp length (length of sleeve)	8 mm
Inner Diameter plastic collar	2.6 mm
Diameter crimp sleeve inside	1 mm

Mechanical data

Plastic collar	Standard collar
----------------	-----------------

Material data

Color	white
Fire load	0.001 MJ
Weight	0.1 g

Commercial data

Product Group	2 (Terminal Block Accessories)
PU (SPU)	1000 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332277433
Customs tariff number	85369010000

Product classification	
UNSPSC	39121405

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance


Compliance Search

Environmental Product Compliance 216-201	↓
--	---

Documentation

Bid Text			
216-201	19.02.2019	xml 2.80 KB	↓
216-201	11.09.2017	doc 23.50 KB	↓

Installation Notes



A perfect gas-tight crimp – both electrical-ly and mechanically reliable