
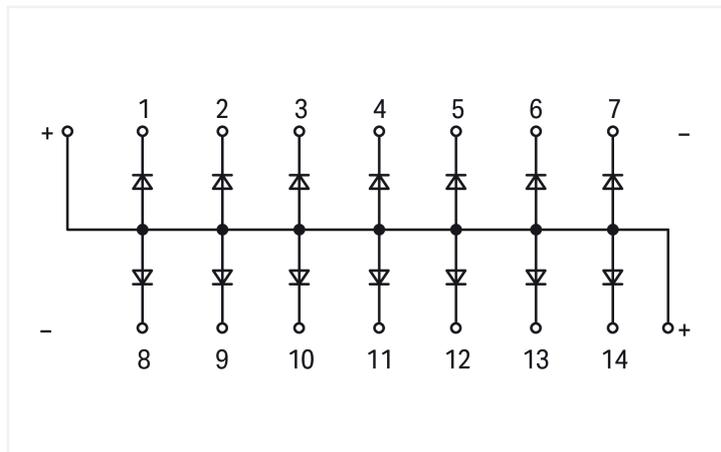


# Data Sheet | Item Number: 289-121

Component module with diode; with 14 pcs; Diode 1N4007; with common anode; 2,50 mm<sup>2</sup>

<https://www.wago.com/289-121>

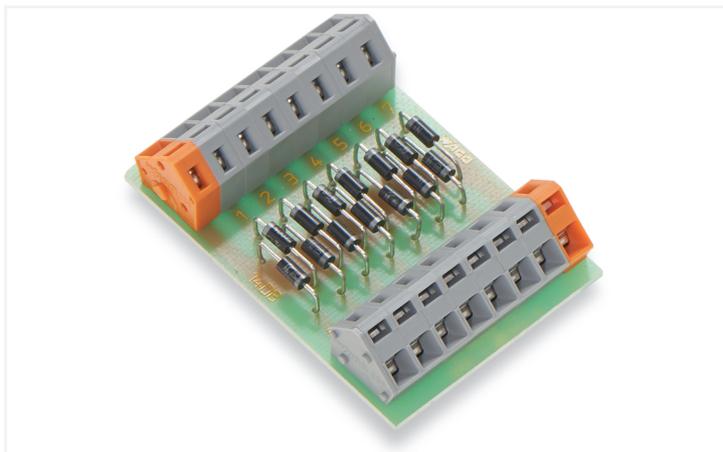

## Notes

### Safety Information

**Notice!** Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.

### Note

Max. permissible forward current per the manufacturer's data sheet. With all diodes loaded, the continuous current must be reduced to 0.45 A.

## Electrical data

Operating voltage	≤ 250 VAC/VDC
Peak reverse voltage	1000 V
Type of diode	1N4007; with common anode
Number/type of diode/LED	14 diodes
Forward voltage per diode	1.1 V
Forward current per diode (resistive)	1 A
Leakage current	50 µA

## Safety and protection

Pollution degree	2
Protection type	IP00

## Connection data

Note (conductor cross-section) 12 AWG: THHN, THWN

### Connection 1

Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

### Physical data

Width	42.5 mm / 1.673 inches
Height from the surface	31.5 mm / 1.24 inches
Depth	62.5 mm / 2.461 inches

### Mechanical data

Mounting type	Mounting on DIN-rail via DIN-rail adapter
Housing design	PCB

### Material data

Fire load	0 MJ
Weight	25.3 g

### Environmental requirements

Ambient temperature (operation)	-25 ... +40 °C
Ambient temperature (storage)	-40 ... +70 °C
Relative humidity	≤ 85 % (non-condensing)
Operating altitude (max.)	2000 m

### Standards and specifications

Standards/specifications	EN 61010-2-201
--------------------------	----------------

### Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	50 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454193027
Customs tariff number	85369010000

### Product classification

UNSPSC	39121629
eCl@ss 10.0	27-14-11-27
eCl@ss 9.0	27-14-11-49
ETIM 9.0	EC000903
ETIM 8.0	EC000903
ECCN	NO US CLASSIFICATION

### Environmental Product Compliance

CAS-No.	7439-92-1 79-94-7
REACH Candidate List Substance	2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	bb8a0b0e-3964-4120-8e1c-27204a68aba9
SCIP notification number (Belgium)	d29bd272-bc7c-4a8c-a541-1c0b42b14821
SCIP notification number (Bulgaria)	24f739dd-8317-45a7-8980-1510efe55520
SCIP notification number (Czech Republic)	de65635f-189e-4b60-b7b1-48b37fcfce93
SCIP notification number (Denmark)	0fc6bb6e-77af-4b34-8aea-9e6aa426b88b

**Environmental Product Compliance**

SCIP notification number (Finland)	1c32d05a-fa8a-47f3-9632-b7411ac1844c
SCIP notification number (France)	3eb75477-7c50-44a0-9f9e-1eb744efccbc
SCIP notification number (Germany)	2b15fbc9-2491-4083-af0a-2e06d361f922
SCIP notification number (Hungary)	f6e7d9c9-e05b-4f92-97a3-0c8a9084acdb
SCIP notification number (Italy)	afc9c10b-6fd0-4112-9ff1-36402180ea5e
SCIP notification number (Netherlands)	e42ec1b7-00e6-4fcf-b0f1-63538a9fa38b
SCIP notification number (Poland)	d2f4ac0c-5b1c-402a-8d17-45565173e323
SCIP notification number (Romania)	2e4ea159-22f6-4859-80a8-cfcfb994f213
SCIP notification number (Sweden)	f8922ba3-ecb8-48bc-b661-796ed0b482ad

**Approvals / Certificates**

**General approvals**



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084

**Downloads**

**Environmental Product Compliance**

**Compliance Search**

Environmental Product Compliance 289-121	↓
--	---

**Documentation**

**Bid Text**

289-121	11.02.2015	doc 25.00 KB	↓
289-121	19.02.2019	xml 3.50 KB	↓

**Instruction Leaflet**

Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	↓
---	-----------------------	-------------------	---

**CAD/CAE-Data**

**CAD data**

2D/3D Models 289-121	↓
----------------------	---

**CAE data**

EPLAN Data Portal 289-121	↓
WSCAD Universe 289-121	↓
ZUKEN Portal 289-121	↓

**1 Compatible Products**

**1.1 Required Accessories**

**1.1.1 Installation**

**1.1.1.1 Mounting carrier and mounting feet**



**Item No.: 288-001**  
Mounting carrier; gray

**Item No.: 288-002**  
Universal mounting foot; snap-fit type; suitable for DIN 15, 35 and 32 rails; gray

**1.2 Optional Accessories**

**1.2.1 Ferrule**

**1.2.1.1 Ferrule**



**Item No.: 216-301**  
Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow



**Item No.: 216-321**  
Ferrule; Sleeve for 0.25 mm<sup>2</sup> / AWG 24; insulated; electro-tin plated; yellow



**Item No.: 216-302**  
Ferrule; Sleeve for 0.34 mm<sup>2</sup> / 22 AWG; insulated; electro-tin plated; light turquoise



**Item No.: 216-322**  
Ferrule; Sleeve for 0.34 mm<sup>2</sup> / 22 AWG; insulated; electro-tin plated; light turquoise



**Item No.: 216-201**  
Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; acc. to DIN 46228, Part 4/09.90; white



**Item No.: 216-241**  
Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



**Item No.: 216-221**  
Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; white



**Item No.: 216-242**  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-262**  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-202**  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray



**Item No.: 216-222**  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray



**Item No.: 216-243**  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item No.: 216-263**  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



**Item No.: 216-203**  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; red



**Item No.: 216-223**  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; red



**Item No.: 216-204**  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; black



**Item No.: 216-224**  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; black



**Item No.: 216-244**  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-264**  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



**Item No.: 216-284**  
Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

## 1.2.2 Installation

### 1.2.2.1 Cover



**Item No.: 709-153**

Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent

### 1.2.2.2 Cover carrier



**Item No.: 709-167**

Cover carrier; Type 1; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

## 1.2.3 Marking

### 1.2.3.1 Marking strip



**Item No.: 210-831**

Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white



**Item No.: 210-832**

Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

## 1.2.4 Tool

### 1.2.4.1 Operating tool



**Item No.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured