


Data Sheet | Item Number: 289-614

Interface module; Pluggable connector per DIN 41651; 20-pole; Triple-deck PCB terminal blocks; in mounting carrier; 2,50 mm²

<https://www.wago.com/289-614>

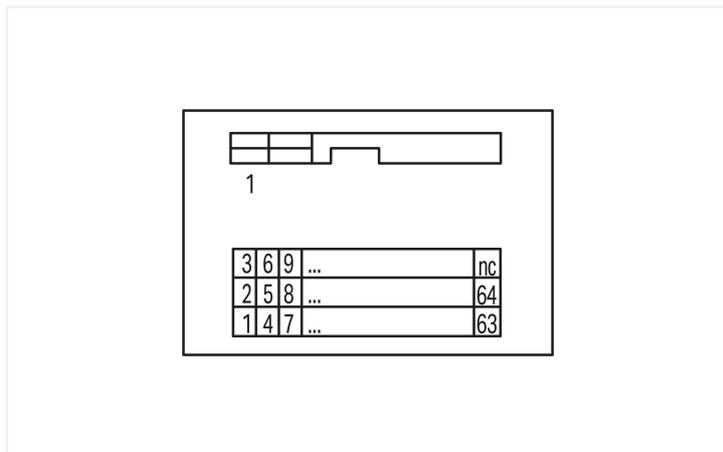

Similar to illustration

Notes

Safety Information **Notice!** Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.

Electrical data

Operating voltage	≤ 125 VAC/VDC
Nominal current	1 A

Safety and protection

Rated Voltage	125 V
Pollution degree	2
Protection type	IP00
Dielectric strength (channel/channel) (AC, 1 min.)	1.3 kVrms
Insulation type	Functional insulation

Compatibility

Siemens	
Siemens ET200SP	6ES7 134-6FF00-0AA1
	6ES7 134-6FB00-0BA1
	6ES7 134-6HD01-0BA1
	6ES7 134-6HD01-2BA1
	6ES7 134-6HB00-0CA1
	6ES7 134-6HB00-0DA1
	6ES7 134-6GF00-0AA1
	6ES7 134-6GB00-0BA1
	6ES7 134-6GD01-0BA1
	6ES7 134-6GD01-2BA1
	6ES7 134-6JF00-0CA1
	6ES7 134-6JF00-2CA1
	6ES7 134-6JD00-0CA1
	6ES7 134-6JD00-2CA1
	6ES7 134-6TD00-0CA1
	6ES7 135-6FB00-0BA1
	6ES7 135-6GB00-0BA1
	6ES7 135-6HD00-0BA1
	6ES7 135-6HB00-0CA1
	6ES7 135-6HB00-0DA1

Connection data

Performance level 3 / 50 mating cycles

Connection 1

Pluggable connector Pluggable connector per DIN 41651; male connector

Pole number 1 20

Connection type System

Note (conductor cross-section) 12 AWG: THHN, THWN

Mating direction vertical

Connection 2

Design PCB terminal blocks (triple-deck)

Pole number 20

Connection type Field

Connection technology CAGE CLAMP®

WAGO connector WAGO 737 Series

Solid conductor 0.08 ... 2.5 mm² / 28 ... 12 AWG

Fine-stranded conductor 0.08 ... 2.5 mm² / 28 ... 12 AWG

Strip length 5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width 47 mm / 1.85 inches

Height 85 mm / 3.346 inches

Depth from upper-edge of DIN-rail 62 mm / 2.441 inches

Mechanical data

Mounting type DIN-35 rail

Housing design Mounting carrier

Material data

Contact material (connector) Au over Ni

Fire load 0.673 MJ

Weight 37.8 g

Environmental requirements

Ambient temperature (operation) -20 ... +55 °C

Ambient temperature (storage) -40 ... +70 °C

Relative humidity ≤ 85 % (non-condensing)

Standards and specifications

Standards/specifications EN 61010-2-201

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	5 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454011543
Customs tariff number	85366990990

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-14-11-52
eCl@ss 9.0	27-14-11-52
ETIM 9.0	EC002780
ETIM 8.0	EC002780
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 289-614	↓

Documentation

Bid Text			
289-614	19.02.2019	xml 3.50 KB	↓
289-614	20.11.2015	doc 25.50 KB	↓

Instruction Leaflet			
Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	↓

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 289-614	EPLAN Data Portal 289-614
	WSCAD Universe 289-614
	ZUKEN Portal 289-614

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connecting cable



Item No.: 706-100/1300-200
 Connection cable; 20-pole; Pluggable connector per DIN 41651; open-ended; Length: 2 m; Conductor cross-section: 0.14 mm²; UR components

Item No.: 706-100/1300-400
 Connection cable; 20-pole; Pluggable connector per DIN 41651; open-ended; Length: 4 m; Conductor cross-section: 0.14 mm²; UR components

1.1.1.2 System cable



Item No.: 706-2300/300-100
 System cable; for Siemens S7-300; 16 digital inputs or outputs; Length: 1 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/300-200
 System cable; for Siemens S7-300; 16 digital inputs or outputs; Length: 2 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/300-300
 System cable; for Siemens S7-300; 16 digital inputs or outputs; Length: 3 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/101-100
 System cable; for Siemens S7-300; 16 digital inputs; Length: 1 m; Conductor cross-section: 0.34 mm²



Item No.: 706-2300/101-200
 System cable; for Siemens S7-300; 16 digital inputs; Length: 2 m; Conductor cross-section: 0.34 mm²

Item No.: 706-2300/101-300
 System cable; for Siemens S7-300; 16 digital inputs; Length: 3 m; Conductor cross-section: 0.34 mm²

Item No.: 706-2300/301-100
 System cable; for Siemens S7-300; 2 x 16 digital inputs or outputs; Length: 1 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/301-200
 System cable; for Siemens S7-300; 2 x 16 digital inputs or outputs; Length: 2 m; Conductor cross-section: 0.14 mm²



Item No.: 706-2300/301-300
 System cable; for Siemens S7-300; 2 x 16 digital inputs or outputs; Length: 3 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/100-100
 System cable; for Siemens S7-300; 2 x 16 digital inputs; Length: 1 m; Conductor cross-section: 0.34 mm²

Item No.: 706-2300/100-200
 System cable; for Siemens S7-300; 2 x 16 digital inputs; Length: 2 m; Conductor cross-section: 0.34 mm²

Item No.: 706-2300/100-300
 System cable; for Siemens S7-300; 2 x 16 digital inputs; Length: 3 m; Conductor cross-section: 0.34 mm²



Item No.: 706-2300/200-100
 System cable; for Siemens S7-300; 2 x 16 digital outputs; Length: 1 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/200-200
 System cable; for Siemens S7-300; 2 x 16 digital outputs; Length: 2 m; Conductor cross-section: 0.14 mm²

Item No.: 706-2300/200-300
 System cable; for Siemens S7-300; 2 x 16 digital outputs; Length: 3 m; Conductor cross-section: 0.14 mm²

Item No.: 706-7753/301-200
 System cable; for WAGO-I/O-SYSTEM, 753 Series; 2 x 16 digital inputs or outputs; Length: 2 m; Conductor cross-section: 0.14 mm²

1.1.2 Marking

1.1.2.1 Marking strip



Item No.: 709-196

Marking strips; for laser printer; translucent



Item No.: 709-177

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-720


Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry



Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.