


Data Sheet | Item Number: 830-800/000-313

Potential distribution module; 1 potential; with 1 input clamping point; Conductor cross-section up to 16 mm²; with lever; with 9 output clamping points; Conductor cross-section up to 2.5 mm²; gray

<https://www.wago.com/830-800/000-313>

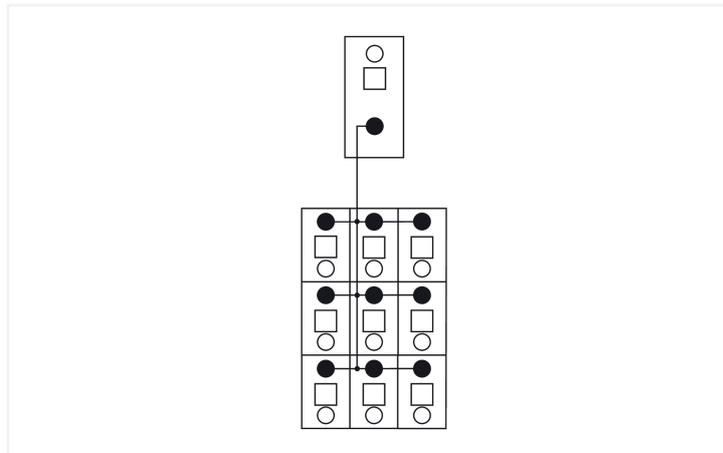

Color: ■ gray

Electrical data

| | |
|------------------------------------|--|
| Operating voltage | ≤ 250 VAC/VDC |
| Current per connection (max.) | 10 A |
| Total current per potential (max.) | 65 A |
| Specialty functions | with 1 input connection point; with 9 output connection points |

Connection data

| | |
|--------------------------------|--------------------|
| Total number of potentials | 1 |
| Note (conductor cross-section) | 12 AWG: THHN, THWN |

Connection 1

| | |
|-------------------------|---|
| Connection type | Input |
| Mating direction | 30° |
| Actuation type | Lever |
| Connection technology | CAGE CLAMP® |
| WAGO connector | WAGO 2716 Series |
| Solid conductor | 1.5 ... 16 mm ² / 16 ... 6 AWG |
| Fine-stranded conductor | 1.5 ... 16 mm ² / 16 ... 6 AWG |
| Strip length | 12 ... 13 mm / 0.47 ... 0.51 inches |

Connection 2

| | |
|-------------------------|--|
| Connection type | Output |
| Mating direction 2 | vertical |
| Connection technology | CAGE CLAMP® |
| WAGO connector | WAGO 737 Series |
| Solid conductor | 0.08 ... 2.5 mm ² / 28 ... 12 AWG |
| Fine-stranded conductor | 0.08 ... 2.5 mm ² / 28 ... 12 AWG |
| Strip length | 5 ... 6 mm / 0.2 ... 0.24 inches |

Physical data

| | |
|-----------------------------------|---------------------|
| Width | 21 mm / 0.81 inches |
| Height | 85 mm / 3.35 inches |
| Depth from upper-edge of DIN-rail | 62 mm / 2.44 inches |

Mechanical data

| | |
|----------------|------------------|
| Mounting type | DIN-35 rail |
| Housing design | Mounting carrier |

Material data

| | |
|-----------|----------|
| Color | gray |
| Fire load | 0.914 MJ |
| Weight | 61.9 g |

Environmental requirements

| | |
|---------------------------------|-------------------------------|
| Ambient temperature (operation) | -20 ... +50 °C |
| Relative humidity | ≤ 95 % (without condensation) |

Standards and specifications

| | |
|------------------------------------|-------------------|
| Standards/specifications (pending) | cULus 61010-2-201 |
|------------------------------------|-------------------|

Commercial data

| | |
|-----------------------|---------------|
| PU (SPU) | 10 (1) pcs |
| Packaging type | Box |
| Country of origin | US |
| GTIN | 4055143379380 |
| Customs tariff number | 85369010000 |

Product Classification

| | |
|-------------|-------------|
| UNSPSC | 39121410 |
| eCl@ss 10.0 | 27-14-11-52 |
| eCl@ss 9.0 | 27-14-11-52 |
| ETIM 9.0 | EC002780 |
| ETIM 8.0 | EC002780 |
| ECCN | EAR99 |

Environmental Product Compliance

| | |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

Approvals / Certificates

General approvals



| Approval | Standard | Certificate Name |
|----------------------------|----------------|------------------|
| EAC GZO Almaty Standart | TP TC 004/2011 | EAC CoC 03084 |

Declarations of conformity and manufacturer's declarations

Approval Standard Certificate Name

| | | |
|---|---|---|
| EU-Declaration of Confor- mity WAGO GmbH & Co. KG | - | - |
| UK-Declaration of Confor- mity WAGO GmbH & Co. KG | - | - |

Downloads

Environmental Product Compliance

Compliance Search

| | |
|--|---|
| Environmental Product Compliance 830-800/000-313 | ↓ |
|--|---|

Documentation

Bid Text

| | | | |
|-----------------|------------|------------------|---|
| 830-800/000-313 | 19.02.2019 | xml 3.68 KB | ↓ |
| 830-800/000-313 | 01.07.2019 | docx 15.48 KB | ↓ |

CAD/CAE-Data

CAD data

| | |
|---------------------------------|---|
| 2D/3D Models 830-800/000-313 | ↓ |
|---------------------------------|---|

CAE data

| | |
|--------------------------------------|---|
| EPLAN Data Portal 830-800/000-313 | ↓ |
| ZUKEN Portal 830-800/000-313 | ↓ |

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



Item No.: 216-262
Ferrule; Sleeve for 0.75 mm² / 18 AWG; in-
sulated; electro-tin plated; electrolytic
copper; gastight crimped; acc. to DIN
46228, Part 4/09.90; gray

Item No.: 216-263
Ferrule; Sleeve for 1 mm² / AWG 18; insu-
lated; electro-tin plated; electrolytic cop-
per; gastight crimped; acc. to DIN 46228,
Part 4/09.90; red

Item No.: 216-264
Ferrule; Sleeve for 1.5 mm² / AWG 16; in-
sulated; electro-tin plated; electrolytic
copper; gastight crimped; acc. to DIN
46228, Part 4/09.90; black

Item No.: 216-284
Ferrule; Sleeve for 1.5 mm² / AWG 16; in-
sulated; electro-tin plated; electrolytic
copper; gastight crimped; acc. to DIN
46228, Part 4/09.90; black

1.1.1.1 Ferrule



Item No.: 216-289

Ferrule; Sleeve for 10 mm² / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

Item No.: 216-209

Ferrule; Sleeve for 10 mm² / AWG 8; insulated; electro-tin plated; red

Item No.: 216-266

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

Item No.: 216-286

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



Item No.: 216-267

Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

Item No.: 216-287

Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

Item No.: 216-208

Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow

Item No.: 216-288

Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow

1.1.2 Marking

1.1.2.1 Marking strip



Item No.: 709-196

Marking strips; for laser printer; translucent

Item No.: 210-831

Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white

Item No.: 210-832

Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

Item No.: 709-177

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.3 Tool

1.1.3.1 Operating tool



Item No.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured