


OA125AP Series Dual Voltage




AC Fans - 115V/230V
120mm x 120mm x 25mm
(4.7" x 4.7" x 1.0")

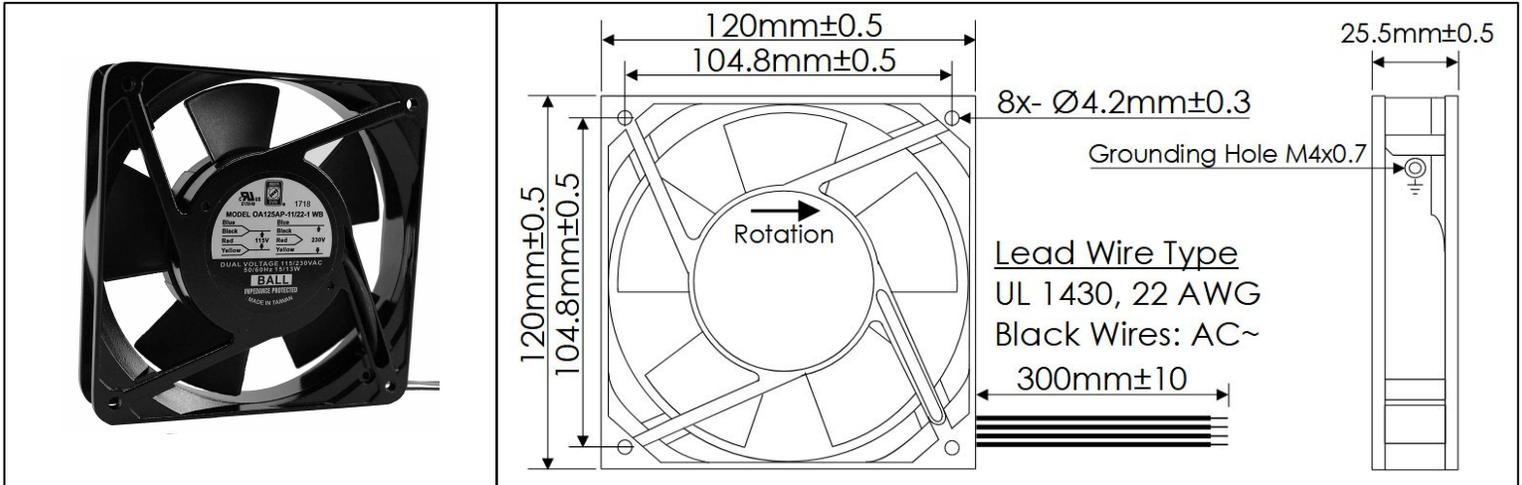

Frame	Die Cast Aluminum, Black Finish	Operating Temperature -20°C ~ +70°C Storage Temperature -40°C ~ +100°C Life Expectancy 80,000 Hours (L10 at 45°C) Weight: 0.83 lbs.	
Impeller	PBT, UL94 V-0 Plastic		
Connection	4x Lead Wires, 22 AWG		
Motor	Shaded Pole, Single Phase, Impedance Protected		
Bearing System	Dual Ball Bearings		
Dielectric Strength	1500VAC/min, <1mA		
Insulation Resistance	Over 100MΩ @ 500VDC Between Lead wires and Frame		

Part Number	Rated Voltage (Volts AC) 50/60Hz	Rated Power (Watts) 50/60Hz	Voltage Range (Volts AC) 50/60Hz	Rated Speed (RPM) 50/60Hz	Max Airflow (CFM) 50/60Hz	Noise Level (dBA) 50/60Hz	Max Static Pressure ("H ₂ O) 50/60Hz
OA125AP-11/22-1WB	115 / 230	15 / 13	100-120 / 200-240	2450 / 2950	58 / 75	37	0.24 / 0.29
OA125AP-11/22-2WB	115 / 230	12 / 10	100-120 / 200-240	2000 / 2200	47 / 56	31	0.19 / 0.21

Dual Voltage Wiring Diagram 115VAC

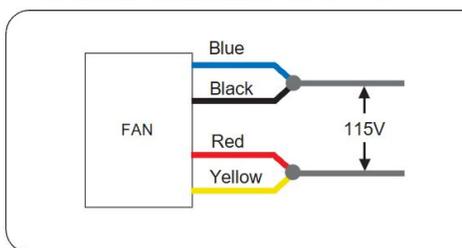

Dual Voltage Wiring Diagram 230VAC

