





OA172SAPL IP55 Series

AC Fans - 115, 230V
172mm x 150mm x 38mm
(6.7" x 5.9" x 1.5")

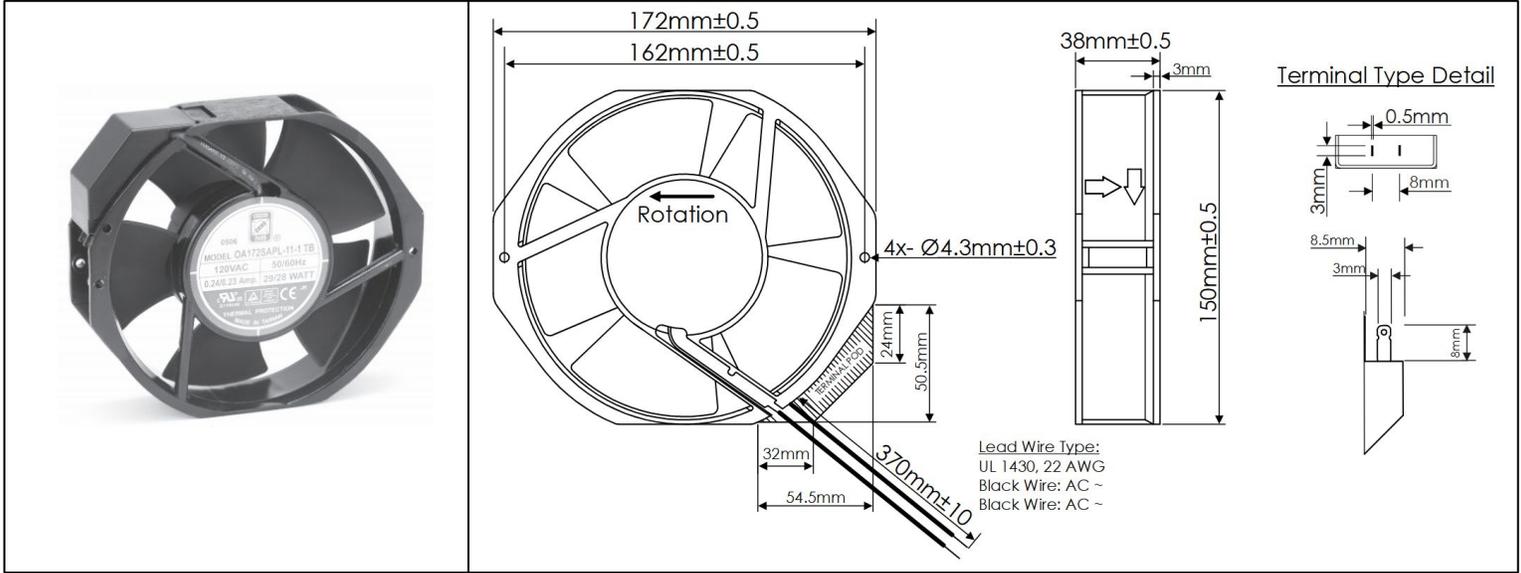

Frame	Die Cast Aluminum, Black Finish	<u>Operating Temperature</u> -40°C ~ +70°C <u>Storage Temperature</u> -40°C ~ +80°C <u>Life Expectancy</u> 40,000 Hours (L10 at 40°C) <u>Installed Options</u> IP55 Rated Motor <u>Available Options</u> Tachometer Output Alarm Output IP55 Ratings Weight: 1.7 lbs.
Impeller	PBT, UL94 V-0 Plastic	
Connection	2x Wire Leads, or Terminals	
Motor	AC, Capacitor Induction, Thermally Protected, Class B Insulation, IP55	
Bearing System	Dual Ball Bearings	
Dielectric Strength	500VAC/min, <5mA	
Insulation Resistance	≥10MΩ @ 500VDC	

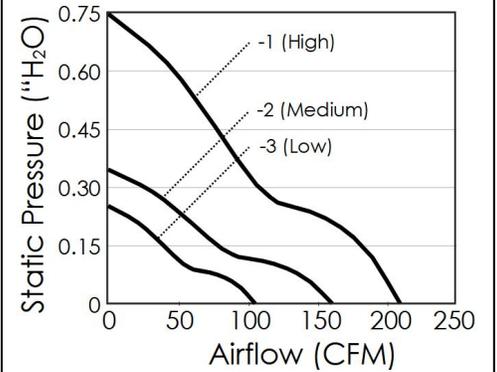

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Input Power (Watts)	Frequency (Hertz)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure (\"H2O)
OA172SAPL-11-1*BIP55	115	80 ~ 125	29 / 28	50 / 60	2800 / 3400	175 / 211	54 / 58	0.67 / 0.75
OA172SAPL-11-2*BIP55	115	80 ~ 125	29 / 28	50 / 60	2300 / 2750	133 / 160	47 / 50	0.33 / 0.35
OA172SAPL-11-3*BIP55	115	80 ~ 125	29 / 28	50 / 60	1400 / 1700	84 / 102	35 / 38	0.17 / 0.25
OA172SAPL-22-1*BIP55	230	220 ~ 240	27 / 26	50 / 60	2800 / 3400	175 / 211	54 / 58	0.67 / 0.75

* Substitute "T" for terminal type power connection, or "W" for lead wire type power connection.
-60Hz values shown in PQ diagram.